

Nplus NEXUS

N+ 楠加敏科
Nplus NEXUS

SANITARY FITTINGS

PRODUCT INTRODUCTION · CN / EN

卫生级管件产品介绍册

3A · 45 · BPE · ISO · DIN · MS
HOSE ADAPTERS · UNION · VACUUM
ACCESSORIES

HIGH-PURITY STAINLESS STEEL FITTINGS

OPTIMIZED FOR AI LIQUID COOLING

Precision Components for
Reliable Coolant Distribution



HIGH PURITY
Electropolished
Internal Finish



LEAK-FREE CONNECTIONS
Secure Sealing
Zero Leakage



LOW PRESSURE LOSS
Smooth Flow Path
Enhanced Efficiency



FAST & EASY INSTALLATION
Tri-Clamp Compatible
Modular & Flexible



AI DATA CENTERS
High-Density
Compute



DIRECT-TO-CHIP COOLING
Next-Gen Thermal
Solutions



CDU SYSTEMS
Coolant Distribution
Units



REAR DOOR HEAT EXCHANGERS
Reliable Flow
Distribution



IMMERSION COOLING
Future-Ready
Infrastructure

ENGINEERED FOR CLEAN FLOW

Sanitary connection systems

卫生流体连接系统

A clean, Nplus-curated presentation of the complete sanitary fitting range.

Only product imagery, technical drawings and selection data are retained from the supplied reference.

Source branding, cover artwork, page numbers and surrounding graphics have been removed.

**USE****Food · beverage · biotech · pharma**

食品、饮料、生物制药

RANGE ARCHITECTURE

One catalogue. Every clean connection.

全系列卫生级连接件，一册选型

01 Sanitary Pipe Fittings 3A Series
卫生级管件 3A 系列

02 Sanitary Pipe Fittings 45 Series
卫生级管件 45 系列

03 Sanitary Pipe Fittings BPE Series
卫生级管件 BPE 系列

04 Sanitary Pipe Fittings ISO Series
卫生级管件 ISO 系列

05 Sanitary Pipe Fittings DIN Series
卫生级管件 DIN 系列

06 Sanitary Pipe Fittings MS Series
卫生级管件 MS 系列

07 Sanitary Hose Barb Adapter Series
卫生级软管接头系列

08 Sanitary Union Series
卫生级由任系列

09 Sanitary Vacuum Fittings Series
卫生级真空件系列

10 Sanitary Cleaning Ball Series
清洗球系列

11 Sanitary Manhole Series
卫生级人孔系列

12 Pipe Support Series
管支架系列

13 Sanitary Sight Glass Series
视镜系列

14 Clamp Screw Nut
卡箍螺母

15 Clamp & Accessories
卡箍及配件


16 Special Sanitary Fittings
特殊卫生级管件系列

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified

产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

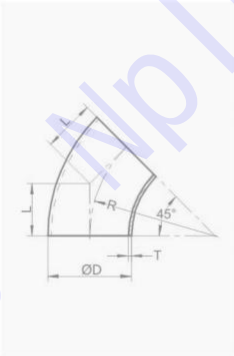

Size	ØD	L	R	T
1/2"	12.7	7.9	19.1	1.65
3/4"	19.1	11.8	28.6	1.65
1.0"	25.4	15.8	38.1	1.65
1.25"	31.8	19.8	47.7	1.65
1.5"	38.1	23.7	57.2	1.65
2.0"	50.8	31.6	76.2	1.65
2.5"	63.5	39.5	95.3	1.65
3.0"	76.2	47.3	114.3	1.65
4.0"	101.6	63.1	152.4	2.1
6.0"	152.4	94.7	228.6	2.77
8.0"	203.2	126.4	304.8	2.77
10.0"	254	157.8	381	3.45
12.0"	304.8	189.3	457.2	3.45

PRODUCT IMAGE + TECHNICAL DATA



Size	ØD	L	R	T
1/2"	12.7	30.2	19.1	1.65
3/4"	19.1	30.2	28.6	1.65
1.0"	25.4	30.2	38.1	1.65
1.25"	31.8	35.8	47.7	1.65
1.5"	38.1	41.3	57.2	1.65
2.0"	50.8	58.7	76.2	1.65
2.5"	63.5	76.2	95.3	1.65
3.0"	76.2	93.7	114.3	1.65
4.0"	101.6	122.2	152.4	2.1
6.0"	152.4	158.2	228.6	2.77

PRODUCT IMAGE + TECHNICAL DATA




Size	ØD	L	R	T
1/2"	12.7	19.1	19.1	1.65
3/4"	19.1	28.6	28.6	1.65
1.0"	25.4	38.1	38.1	1.65
1.25"	31.8	47.7	47.7	1.65
1.5"	38.1	57.2	57.2	1.65
2.0"	50.8	76.2	76.2	1.65
2.5"	63.5	95.3	95.3	1.65
3.0"	76.2	114.3	114.3	1.65
4.0"	101.6	152.4	152.4	2.1
5.0"	127	190.5	190.5	2.77
6.0"	152.4	228.6	228.6	2.77
8.0"	203.2	304.8	304.8	2.77
10.0"	254	381	381	3.45
12.0"	304.8	457.2	457.2	3.45

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified


产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA




90°焊式长弯头 / 90° Weld Long Elbow					
Size	ØD	L	R	T	
1/2"	12.7	52.4	19.1	1.65	
3/4"	19.1	52.4	28.6	1.65	
1.0"	25.4	52.4	38.1	1.65	
1.25"	31.8	64	47.7	1.65	
1.5"	38.1	74.6	57.2	1.65	
2.0"	50.8	103.2	76.2	1.65	
2.5"	63.5	131.8	95.3	1.65	
3.0"	76.2	160.3	114.3	1.65	
4.0"	101.6	211.1	152.4	2.1	
6.0"	152.4	292.1	228.6	2.77	

PRODUCT IMAGE + TECHNICAL DATA




45°焊夹式长弯头 / 45° Weld-Clamp Long Elbow					
Size	ØD	L	L1	R	T
1/2"	12.7	42.9	30.2	19.1	1.65
3/4"	19.1	42.9	30.2	28.6	1.65
1.0"	25.4	42.9	30.2	38.1	1.65
1.25"	31.8	48.5	35.8	47.7	1.65
1.5"	38.1	54	41.3	57.2	1.65
2.0"	50.8	71.4	58.7	76.2	1.65
2.5"	63.5	88.9	76.2	95.3	1.65
3.0"	76.2	106.4	93.7	114.3	1.65
4.0"	101.6	138	122.2	152.4	2.1
6.0"	152.4	179.7	158.2	228.6	2.77

PRODUCT IMAGE + TECHNICAL DATA



90°焊夹式长弯头 / 90° Weld-Clamp Elbow					
Size	ØD	L	L1	R	T
1/2"	12.7	65.1	52.4	19.1	1.65
3/4"	19.1	65.1	52.4	28.6	1.65
1.0"	25.4	65.1	52.4	38.1	1.65
1.25"	31.8	76.7	64	47.7	1.65
1.5"	38.1	87.3	74.6	57.2	1.65
2.0"	50.8	115.9	103.2	76.2	1.65
2.5"	63.5	144.5	131.8	95.3	1.65
3.0"	76.2	173	160.3	114.3	1.65
4.0"	101.6	227	211.2	152.4	2.1
6.0"	152.4	313.6	292.1	228.6	2.77

PRODUCT IMAGE + TECHNICAL DATA




45°夹式短弯头 / 45° Clamp Short Elbow				
Size	ØD	L	R	T
1/2"	12.7	20.6	19.1	1.65
3/4"	19.1	24.6	28.6	1.65
1.0"	25.4	28.5	38.1	1.65
1.25"	31.8	32.5	47.7	1.65
1.5"	38.1	36.4	57.2	1.65
2.0"	50.8	44.3	76.2	1.65
2.5"	63.5	52.2	95.3	1.65
3.0"	76.2	60	114.3	1.65
4.0"	101.6	78.9	152.4	2.1
6.0"	152.4	116.2	228.6	2.77

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified

产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

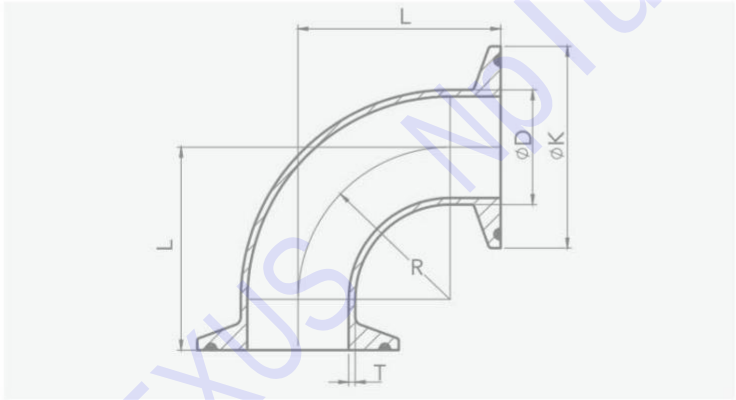


90°夹式短弯头 / 90 ° Clamp Short Elbow				
Size	ØD	L	R	T
1/2"	12.7	31.8	19.1	1.65
3/4"	19.1	41.3	28.6	1.65
1.0"	25.4	50.8	38.1	1.65
1.25"	31.8	60.4	47.7	1.65
1.5"	38.1	69.9	57.2	1.65
2.0"	50.8	88.9	76.2	1.65
2.5"	63.5	107.95	95.3	1.65
3.0"	76.2	127	114.3	1.65
4.0"	101.6	168.2	152.4	2.1
6.0"	152.4	250.1	228.6	2.77

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified



产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA



锥形同心大小头 / Welded Concentric Reducer					
Size	ØD	Ød	L	T	T1
3/4"x1/2"	19.1	12.7	25.4	1.65	1.65
1.0"x1/2"	25.4	12.7	50.8	1.65	1.65
1.0"x3/4"	25.4	19.1	25.4	1.65	1.65
1.5"x1/2"	38.1	12.7	101.6	1.65	1.65
1.5"x3/4"	38.1	19.1	76.2	1.65	1.65
1.5"x1.0"	38.1	25.4	50.8	1.65	1.65
2.0"x1/2"	50.8	12.7	152.4	1.65	1.65
2.0"x3/4"	50.8	19.1	127	1.65	1.65
2.0"x1.0"	50.8	25.4	101.6	1.65	1.65
2.0"x1.5"	50.8	38.1	50.8	1.65	1.65
2.5"x1.0"	63.5	25.4	152.4	1.65	1.65
2.5"x1.5"	63.5	38.1	101.6	1.65	1.65
2.5"x2.0"	63.5	50.8	50.8	1.65	1.65
3.0"x1.0"	76.2	25.4	203.2	1.65	1.65
3.0"x1.5"	76.2	38.1	152.4	1.65	1.65
3.0"x2.0"	76.2	50.8	101.6	1.65	1.65
3.0"x2.5"	76.2	63.5	50.8	1.65	1.65
4.0"x1.0"	101.6	25.4	304.8	2.1	1.65
4.0"x1.5"	101.6	38.1	254	2.1	1.65
4.0"x2.0"	101.6	50.8	203.2	2.1	1.65
4.0"x2.5"	101.6	63.5	152.4	2.1	1.65
4.0"x3.0"	101.6	76.2	101.6	2.1	1.65
6.0"x2.0"	152.4	50.8	139.7	2.77	1.65
6.0"x3.0"	152.4	76.2	139.7	2.77	1.65
6.0"x4.0"	152.4	101.6	139.7	2.77	2.1

PRODUCT IMAGE + TECHNICAL DATA




焊式等径平口短三通 / Welded Equal Short Tee Without Straight End				
Size	ØD	L	L1	T/T1
1.0"	25.4	57.2	14.7	1.65
1.5"	38.1	84.2	21	1.65
2.0"	50.8	104.8	27.4	1.65
2.5"	63.5	119	33.7	1.65
3.0"	76.2	131.8	40.1	1.65
4.0"	101.6	174.6	52.8	2.1

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified



产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

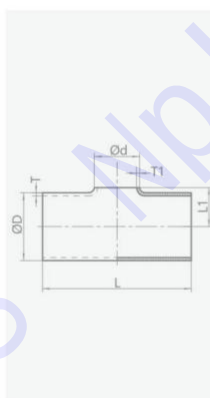


焊式变径平口短三通 Weld Short Reducing Tee Without Straight End						
Size	ØD	Ød	L	L1	T1	T
1.5"x1.0"	38.1	25.4	84.2	21	1.65	1.65
2.0"x1.0"	50.8	25.4	104.8	27.4	1.65	1.65
2.0"x1.5"	50.8	38.1	104.8	27.4	1.65	1.65
2.5"x1.0"	63.5	25.4	119	33.75	1.65	1.65
2.5"x1.5"	63.5	38.1	119	33.75	1.65	1.65
2.5"x2.0"	63.5	50.8	119	33.75	1.65	1.65
3.0"x1.0"	76.2	25.4	131.8	40.1	1.65	1.65
3.0"x1.5"	76.2	38.1	131.8	40.1	1.65	1.65
3.0"x2.0"	76.2	50.8	131.8	40.1	1.65	1.65
3.0"x2.5"	76.2	63.5	131.8	40.1	1.65	1.65
4.0"x1.0"	101.6	25.4	174.6	52.8	1.65	2.1
4.0"x1.5"	101.6	38.1	174.6	52.8	1.65	2.1
4.0"x2.0"	101.6	50.8	174.6	52.8	1.65	2.1
4.0"x2.5"	101.6	63.5	174.6	52.8	1.65	2.1
4.0"x3.0"	101.6	76.2	174.6	52.8	1.65	2.1

PRODUCT IMAGE + TECHNICAL DATA




焊式等径短三通 Weld Short Equal Tee			
Size	ØD	L	T
1/2"	12.7	38.1	1.65
3/4"	19.1	57.2	1.65
1.0"	25.4	57.2	1.65
1.25"	31.8	76	1.65
1.5"	38.1	84.2	1.65
2.0"	50.8	104.8	1.65
2.5"	63.5	119	1.65
3.0"	76.2	131.8	1.65
4.0"	101.6	174.6	2.1
6.0"	152.4	254	2.77

PRODUCT IMAGE + TECHNICAL DATA



焊式等径长三通 Weld Long Equal Tee			
Size	ØD	L	T
1/2"	12.7	95.2	1.65
3/4"	19.1	95.2	1.65
1.0"	25.4	95.2	1.65
1.25"	31.8	110	1.65
1.5"	38.1	114.4	1.65
2.0"	50.8	152.4	1.65
2.5"	63.5	152.4	1.65
3.0"	76.2	165.2	1.65
4.0"	101.6	196.8	2.1
6.0"	152.4	285.8	2.77

PRODUCT IMAGE + TECHNICAL DATA




焊式变径短三通 / Weld Short Reducing Tee					
Size	ØD	Ød	L	T	T1
3/4"x1/2"	19.1	12.7	57.2	1.65	1.65
1.0"x1/2"	25.4	12.7	57.2	1.65	1.65
1.0"x3/4"	25.4	19.1	57.2	1.65	1.65
1.5"x1/2"	38.1	12.7	84.2	1.65	1.65
1.5"x3/4"	38.1	19.1	84.2	1.65	1.65
1.5"x1.0"	38.1	25.4	84.2	1.65	1.65
2.0"x1/2"	50.8	12.7	104.8	1.65	1.65
2.0"x3/4"	50.8	19.1	104.8	1.65	1.65
2.0"x1.0"	50.8	25.4	104.8	1.65	1.65
2.0"x1.5"	50.8	38.1	104.8	1.65	1.65
2.5"x1.0"	63.5	25.4	119	1.65	1.65
2.5"x1.5"	63.5	38.1	119	1.65	1.65
2.5"x2.0"	63.5	50.8	119	1.65	1.65
3.0"x1.0"	76.2	25.4	131.8	1.65	1.65
3.0"x1.5"	76.2	38.1	131.8	1.65	1.65
3.0"x2.0"	76.2	50.8	131.8	1.65	1.65
3.0"x2.5"	76.2	63.5	131.8	1.65	1.65
4.0"x1.0"	101.6	25.4	174.6	2.1	1.65
4.0"x1.5"	101.6	38.1	174.6	2.1	1.65
4.0"x2.0"	101.6	50.8	174.6	2.1	1.65
4.0"x2.5"	101.6	63.5	174.6	2.1	1.65
4.0"x3.0"	101.6	76.2	174.6	2.1	1.65

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified

产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

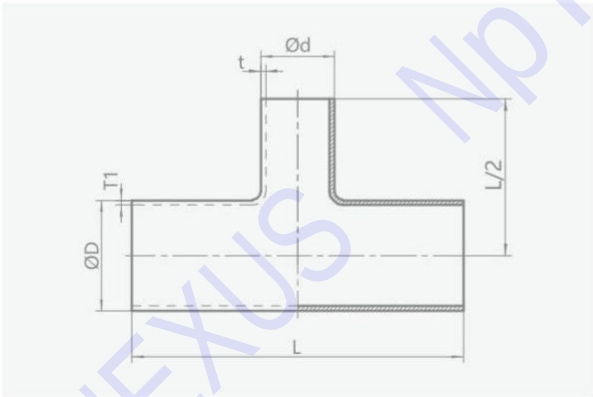

焊式变径长三通 / Weld Long Reducing Tee					
Size	ØD	Ød	L	T	T1
1/2"X3/8"	12.7	9.4	95.2	1.65	1.65
3/4"X1/2"	19.1	12.7	95.2	1.65	1.65
1.0"X3/8"	25.4	9.5	95.2	1.65	1.65
1.0"X1/2"	25.4	12.7	95.2	1.65	1.65
1.0"X3/4"	25.4	19.1	95.2	1.65	1.65
1.5"X1/2"	38.1	12.7	114.4	1.65	1.65
1.5"x1.0"	38.1	25.4	114.4	1.65	1.65
2.0"X1/2"	50.8	12.7	114.4	1.65	1.65
2.0"X1.0"	50.8	25.4	152.4	1.65	1.65
2.0"X1.5"	50.8	38.1	152.4	1.65	1.65
2.5"X1.0"	63.5	25.4	152.4	1.65	1.65
2.5"X1.5"	63.5	38.1	152.4	1.65	1.65
2.5"X2.0"	63.5	50.8	152.4	1.65	1.65
3.0"X1.0"	76.2	25.4	152.4	1.65	1.65
3.0"X1.5"	76.2	38.1	165.2	1.65	1.65
3.0"X2.0"	76.2	50.8	165.2	1.65	1.65
3.0"X2.5"	76.2	63.5	165.2	1.65	1.65
4.0"X1.0"	101.6	25.4	165.2	2.1	1.65
4.0"X1.5"	101.6	38.1	196.8	2.1	1.65
4.0"X2.0"	101.6	50.8	196.8	2.1	1.65
4.0"X2.5"	101.6	63.5	196.8	2.1	1.65
4.0"X3.0"	101.6	76.2	196.8	2.1	1.65

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified

产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

对焊“Y”型三通 Butt Weld Y-Type Tee					
Size	ØA	L	T		
1/2"	12.7	50.8	1.65		
3/4"	19.1	50.8	1.65		
1"	25.4	76.2	1.65		
1 1/2"	38.1	76.2	1.65		
2"	50.8	101.6	1.65		
2 1/2"	63.5	127	1.65		
3"	76.2	152.4	1.65		
4"	101.6	203.2	2.1		
6"	152.4	203.2	2.77		

PRODUCT IMAGE + TECHNICAL DATA

对焊“R”型三通 Butt Weld R-Type Tee (扫把型)				
Size	ØA	R	L	T
1"	25.4	38.1	65	1.65
1 1/2"	38.1	57.2	85	1.65
2"	50.8	76.2	110	1.65
2 1/2"	63.5	95.3	135	1.65
3"	76.2	114.3	155	1.65
4"	101.6	152.4	195	2.1
6"	152.4	228	268	2.77

PRODUCT IMAGE + TECHNICAL DATA

90°夹式双弯管 90° Clamp Double Elbow					
Size	ØA	ØK	R	L	T
1"	25.4	50.5	38.1	50.8	1.65
1 1/4"	31.75	50.5	47.4	60.4	1.65
1 1/2"	38.1	50.5	57.2	69.9	1.65
2"	50.8	64	76.2	88.9	1.65
2 1/2"	63.5	77.5	95.3	107.9	1.65
3"	76.2	91	114.3	127	1.65
4"	101.6	119	152.4	168.4	2.1

PRODUCT IMAGE + TECHNICAL DATA


对焊“Y”型三通 Butt Weld Y-Type Tee(45°)						
Size	ØA	L	L1	L2	T	
1/2"	12.7	152.4	127	25.4	1.65	
3/4"	19.1	152.4	127	25.4	1.65	
1"	25.4	152.4	127	25.4	1.65	
1 1/2"	38.1	187.3	173.1	30.2	1.65	
2"	50.8	222.2	180.9	41.3	1.65	
2 1/2"	63.5	254	215.9	38.1	1.65	
3"	76.2	273.1	225.4	47.6	1.65	
4"	101.6	325.5	273.1	52.4	2.1	
6"	152.4	419.1	317.5	101.6	2.77	

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified


产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

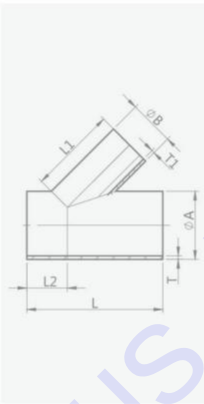

对焊“Y”型变径三通 Butt Weld Y-Type Tee(45°)					
Size	ØA×ØB	L	L1	L2	T×T1
1 1/2"-1"	38.1X25.4	187.3	157.2	30.2	1.65x1.65
2"-1"	50.8x25.4	222.2	181	41.3	1.65x1.65
2"-1 1/2"	50.8x38.1	222.2	181	41.3	1.65x1.65
2 1/2"-1"	63.5x25.4	254	215.9	38.1	1.65x1.65
2 1/2"-1 1/2"	63.5x38.1	254	215.9	38.1	1.65x1.65
2 1/2"-2"	63.5x50.8	254	215.9	38.1	1.65x1.65
3"-1"	76.2x25.4	273.1	225.4	47.6	1.65x1.65
3"-1 1/2"	76.2x38.1	273.1	225.4	47.6	1.65x1.65
3"-2"	76.2x50.8	273.1	225.4	47.6	1.65x1.65
3"-2 1/2"	76.2x63.5	273.1	225.4	47.6	1.65x1.65
4"-1"	101.6x25.4	325.5	273.1	52.4	2.1x1.65
4"-1 1/2"	101.6x38.1	325.5	273.1	52.4	2.1x1.65
4"-2"	101.6x50.8	274.7	273.1	52.4	2.1x1.65
4"-2 1/2"	101.6x63.5	325.5	273.1	52.4	2.1x1.65
4"-3"	101.6x76.2	325.5	273.1	52.4	2.1x1.65

PRODUCT IMAGE + TECHNICAL DATA




135°夹式“Y”型三通 135°clamped Y-Type Tee			
Size	ØA	L	ØK
1/2"	12.7	63.5	25.2
3/4"	19.1	63.5	25.2/50.5
1"	25.4	88.9	50.5
1 1/2"	38.1	88.9	50.5
2"	50.8	114.3	64
2 1/2"	63.5	139.7	77.5
3"	76.2	165.1	91
4"	101.6	219	119
6"	152.4	224.7	166.87

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified


产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA




夹式偏心大小头 / Clamp Eccentric Reducer					
Size	OD	Od	L	T	T1
3/4"x1/2"	19.1	12.7	50.8	1.65	1.65
1.0"x1/2"	25.4	12.7	76.2	1.65	1.65
1.0"x3/4"	25.4	19.1	50.8	1.65	1.65
1.5"x1/2"	38.1	12.7	127	1.65	1.65
1.5"x3/4"	38.1	19.1	101.2	1.65	1.65
1.5"x1.0"	38.1	25.4	76.2	1.65	1.65
2.0"x1/2"	50.8	12.7	177.8	1.65	1.65
2.0"x1.0"	50.8	25.4	127	1.65	1.65
2.0"x1.5"	50.8	38.1	76.2	1.65	1.65
2.5"x1.0"	63.5	25.4	177.8	1.65	1.65
2.5"x1.5"	63.5	38.1	127	1.65	1.65
2.5"x2.0"	63.5	50.8	76.2	1.65	1.65
3.0"x1.0"	76.2	25.4	228.6	1.65	1.65
3.0"x1.5"	76.2	38.1	177.8	1.65	1.65
3.0"x2.0"	76.2	50.8	127	1.65	1.65
3.0"x2.5"	76.2	63.5	76.2	1.65	1.65
4.0"x1.0"	101.6	25.4	330.2	2.1	1.65
4.0"x1.5"	101.6	38.1	282.5	2.1	1.65
4.0"x2.0"	101.6	50.8	231.7	2.1	1.65
4.0"x2.5"	101.6	63.5	180.9	2.1	1.65
4.0"x3.0"	101.6	76.2	130.1	2.1	1.65

PRODUCT IMAGE + TECHNICAL DATA




夹式同心大小头 / Clamp Concentric Reducer					
Size	OD	Od	L	T	T1
3/4"x1/2"	19.1	12.7	50.8	1.65	1.65
1.0"x1/2"	25.4	12.7	76.2	1.65	1.65
1.0"x3/4"	25.4	19.1	50.8	1.65	1.65
1.5"x1/2"	38.1	12.7	127	1.65	1.65
1.5"x3/4"	38.1	19.1	101.6	1.65	1.65
1.5"x1.0"	38.1	25.4	76.2	1.65	1.65
2.0"x1/2"	50.8	12.7	177.8	1.65	1.65
2.0"x3/4"	50.8	19.1	152.4	1.65	1.65
2.0"x1.0"	50.8	25.4	127	1.65	1.65
2.0"x1.5"	50.8	38.1	76.2	1.65	1.65
2.5"x1.0"	63.5	25.4	177.8	1.65	1.65
2.5"x1.5"	63.5	38.1	127	1.65	1.65
2.5"x2.0"	63.5	50.8	76.2	1.65	1.65
3.0"x1.0"	76.2	25.4	228.6	1.65	1.65
3.0"x1.5"	76.2	38.1	177.8	1.65	1.65
3.0"x2.0"	76.2	50.8	127	1.65	1.65
3.0"x2.5"	76.2	63.5	76.2	1.65	1.65
4.0"x1.0"	101.6	25.4	330.2	2.1	1.65
4.0"x1.5"	101.6	38.1	282.5	2.1	1.65
4.0"x2.0"	101.6	50.8	231.7	2.1	1.65
4.0"x2.5"	101.6	63.5	180.9	2.1	1.65
4.0"x3.0"	101.6	76.2	130.1	2.1	1.65

PRODUCT IMAGE + TECHNICAL DATA



夹式等径长三通 / Clamp Long Equal Tee			
Size	OD	L	T
1/2"	12.7	120.6	1.65
3/4"	19.1	120.6	1.65
1.0"	25.4	120.6	1.65
1.25"	31.8	135.4	1.65
1.5"	38.1	139.8	1.65
2.0"	50.8	177.8	1.65
2.5"	63.5	177.8	1.65
3.0"	76.2	190.6	1.65
4.0"	101.6	228.4	2.1
6.0"	152.4	328.8	2.77

PRODUCT IMAGE + TECHNICAL DATA




夹式变径长三通 / Clamp Long Reducing Tee					
Size	OD	Od	L	T	T1
1.5"x1.0"	38.1	25.4	139.8	1.65	1.65
2.0"x1.0"	50.8	25.4	177.8	1.65	1.65
2.0"x1.5"	50.8	38.1	177.8	1.65	1.65
2.5"x1.0"	63.5	25.4	177.8	1.65	1.65
2.5"x1.5"	63.5	38.1	177.8	1.65	1.65
2.5"x2.0"	63.5	50.8	177.8	1.65	1.65
3.0"x1.0"	76.2	25.4	190.6	1.65	1.65
3.0"x1.5"	76.2	38.1	190.6	1.65	1.65
3.0"x2.0"	76.2	50.8	190.6	1.65	1.65
3.0"x2.5"	76.2	63.5	190.6	1.65	1.65
4.0"x1.0"	101.6	25.4	228.4	2.1	1.65
4.0"x1.5"	101.6	38.1	228.4	2.1	1.65
4.0"x2.0"	101.6	50.8	228.4	2.1	1.65
4.0"x2.5"	101.6	63.5	228.4	2.1	1.65
4.0"x3.0"	101.6	76.2	228.4	2.1	1.65

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified

产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

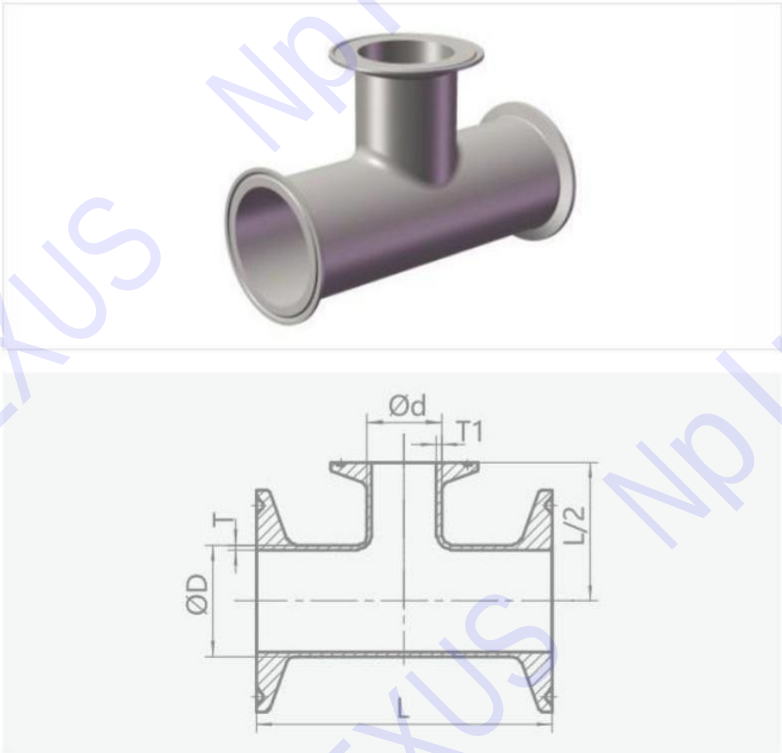


夹式变径短三通 / Clamp Short Equal Tee					
Size	ØD	Ød	L	T	T1
1.5"x1.0"	38.1	25.4	109.6	1.65	1.65
2.0"x1.0"	50.8	25.4	130.2	1.65	1.65
2.0"x1.5"	50.8	38.1	130.2	1.65	1.65
2.5"x1.0"	63.5	25.4	144.4	1.65	1.65
2.5"x1.5"	63.5	38.1	144.4	1.65	1.65
2.5"x2.0"	63.5	50.8	144.4	1.65	1.65
3.0"x1.0"	76.2	25.4	157.2	1.65	1.65
3.0"x1.5"	76.2	38.1	157.2	1.65	1.65
3.0"x2.0"	76.2	50.8	157.2	1.65	1.65
3.0"x2.5"	76.2	63.5	157.2	1.65	1.65
4.0"x1.0"	101.6	25.4	206.2	2.1	1.65
4.0"x1.5"	101.6	38.1	206.2	2.1	1.65
4.0"x2.0"	101.6	50.8	206.2	2.1	1.65
4.0"x2.5"	101.6	63.5	206.2	2.1	1.65
4.0"x3.0"	101.6	76.2	206.2	2.1	1.65

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified



产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

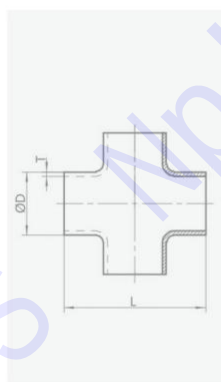


焊式等径短四通 / Weld Short 4 Way Cross				
Size	ØD	L	T	
1/2"	12.7	38.1	1.65	
3/4"	19.1	57.2	1.65	
1.0"	25.4	57.2	1.65	
1.5"	38.1	84.2	1.65	
2.0"	50.8	104.8	1.65	
2.5"	63.5	119	1.65	
3.0"	76.2	131.8	1.65	
4.0"	101.6	174.6	2.1	
6.0"	152.4	254	2.77	

PRODUCT IMAGE + TECHNICAL DATA




焊式等径长四通 / Weld Long 4 Way Cross				
Size	ØD	L	T	
1/2"	12.7	95.2	1.65	
3/4"	19.1	95.2	1.65	
1.0"	25.4	95.2	1.65	
1.5"	38.1	114.4	1.65	
2.0"	50.8	152.4	1.65	
2.5"	63.5	152.4	1.65	
3.0"	76.2	165.2	1.65	
4.0"	101.6	196.8	2.1	

PRODUCT IMAGE + TECHNICAL DATA



夹式等径长四通 / Clamp Long 4 Way Cross				
Size	ØD	L	T	
1"	25.4	120.6	1.65	
1.5"	38.1	139.8	1.65	
2.0"	50.8	177.8	1.65	
2.5"	63.5	177.8	1.65	
3.0"	76.2	190.6	1.65	
4.0"	101.6	228.4	2.1	

PRODUCT IMAGE + TECHNICAL DATA




180°焊式U型弯头 / 180° Weld U-Type Elbow					
Size	ØD	L	H	T	
1/2"	12.7	38.1	19.1	1.65	
3/4"	19.1	57.2	28.6	1.65	
1.0"	25.4	76.2	38.1	1.65	
1.5"	38.1	114.4	57.2	1.65	
2.0"	50.8	152.4	76.2	1.65	
2.5"	63.5	190.5	95.3	1.65	
3.0"	76.2	228.6	114.3	1.65	
4.0"	101.6	304.8	152.4	2.1	
6.0"	152.4	457.2	228.6	2.77	

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified

产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

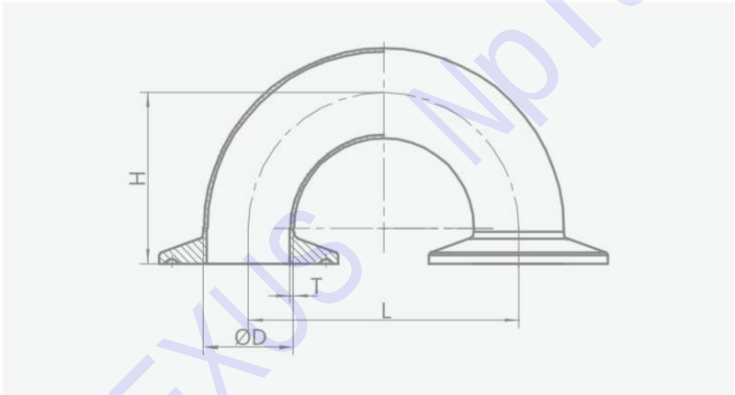

180°夹式U型弯头 / 180° Clamp U-Type Elbow				
Size	ØD	L	H	T
1/2"	12.7	38.1	31.8	1.65
3/4"	19.1	57.2	41.3	1.65
1.0"	25.4	76.2	50.8	1.65
1.5"	38.1	114.4	69.9	1.65
2.0"	50.8	152.4	88.9	1.65
2.5"	63.5	190.5	108	1.65
3.0"	76.2	228.6	127	1.65
4.0"	101.6	304.8	168.2	2.1
6.0"	152.4	457.2	250.1	2.77

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified

产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

13PG方形卡箍垫圈 / Ferrule Gasket		
Size	ØA	ØD
1/2"	9.9	21.8
3/4"	16.3	21.8
1.0"	22.7	50
1.5"	35.9	50
2.0"	48.6	63.5
2.5"	61.3	76.2
3.0"	74	88.9
4.0"	98.6	118
6.0"	147.8	165
8.0"	198.6	216

PRODUCT IMAGE + TECHNICAL DATA

14MPW卡箍接头 / 14 MPW Ferrule				
Size	ØA	ØB	ØD	L
1/2"	8.2	12.7	25.2	41.3
3/4"	14.6	19.1	25.2	41.3

PRODUCT IMAGE + TECHNICAL DATA

14MPW长厚型卡箍接头 / 14 MPW Ferrule					
Size	ØA	ØB	ØC	ØD	L
1/2"	8.2	12.7	-	25.2	54
3/4"	14.6	19.1	-	25.2	54
1.0"	22.1	29.5	43.5	50.5	41.3
1.5"	34.8	42.6	43.5	50.5	41.3
2.0"	47.5	55.7	56.5	64	44.5
2.5"	60.2	68.8	70.5	77.5	44.5
3.0"	72.9	81.9	83.5	91	46.1
4.0"	97.4	108.1	110	119	54
6.0"	146.3	157.3	156.4	166.9	63.5

PRODUCT IMAGE + TECHNICAL DATA



14RMP扩展式卡箍接头 / 14 RMP Expend Ferrule					
Size	ØA	ØB	ØC	ØD	L
1.0"	25.5	29.5	43.5	50.5	19.1
1.5"	38.2	42.6	43.5	50.5	28.6
2.0"	50.9	55.7	56.5	64	33.3
2.5"	63.6	68.8	70.5	77.5	34.9
3.0"	76.3	81.8	83.5	91	36.5
4.0"	101.7	108.1	110	119	38.1

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified



产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

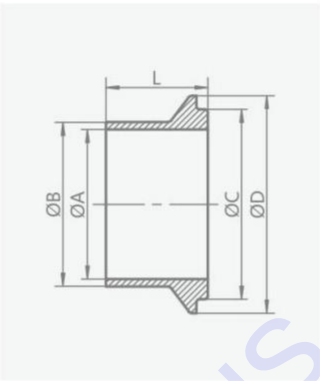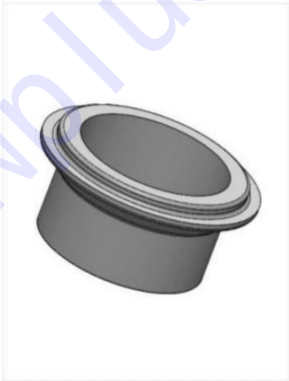

14WI-I型平接头 / 14WI - I Ferrule					
Size	ØA	ØB	ØC	ØD	L
1.0"	22.1	25.7	31.5	50.7	19.8
1.5"	34.8	38.4	44.2	50.7	23.8
2.0"	47.5	51.1	56.9	67.1	26.2
2.5"	60.2	63.8	69.6	84	29.4
3.0"	72.9	76.5	83.8	98.3	30.9
4.0"	97.4	101.9	109.1	123.7	34.1

PRODUCT IMAGE + TECHNICAL DATA

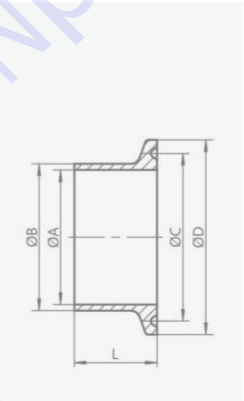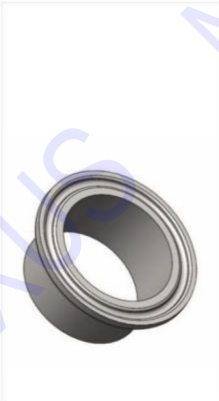



14WMP/MMP/AMP卡箍接头 / 14WMP/MMP/AMP Ferrule							
Size	ØA	ØB	ØC	ØD	L		
					系列I	系列II	系列III
1/4"	3.9	6.4	-	25.2	12.7	-	-
1/2"	9.4	12.7	-	25.2	12.7	21.5	28.6
3/4"	15.8	19.1	-	25.2	12.7	21.5	28.6
3/4"	15.8	19.1	43.5	50.5	12.7	21.5	28.6
1.0"	22.1	25.4	43.5	50.5	12.7	21.5	28.6
1.25"	28.5	31.8	43.5	50.5	12.7	21.5	28.6
1.5"	34.8	38.1	43.5	50.5	12.7	21.5	28.6
2.0"	47.5	50.8	56.5	64	12.7	21.5	28.6
2.5"	60.2	63.5	70.5	77.5	12.7	21.5	28.6
3.0"	72.9	76.2	83.5	91	12.7	21.5	28.6
4.0"	97.4	101.6	110	119	15.8	21.5	28.6
5.0"	122.8	127	134.4	145	21.5	28.6	38.1

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified



产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

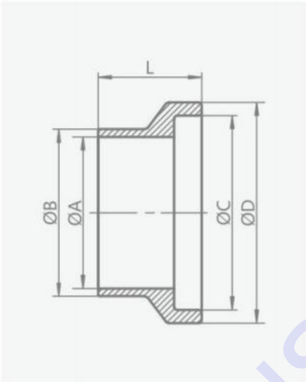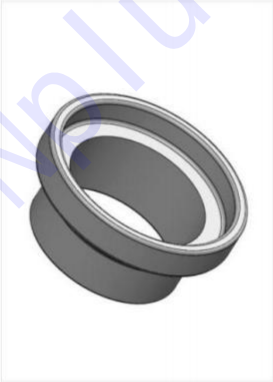

15WI-II型平接头 / 15 WI-II Liner					
Size	ØA	ØB	ØC	ØD	L
1.0"	22.1	25.7	31.9	50.7	19.8
1.5"	34.8	38.4	44.6	50.7	23.8
2.0"	47.5	51.1	57.3	67.1	26.2
2.5"	60.2	63.8	70	84.0	29.4
3.0"	72.9	76.5	84.2	98.3	30.9
4.0"	97.4	101.9	109.6	123.7	34.1

PRODUCT IMAGE + TECHNICAL DATA

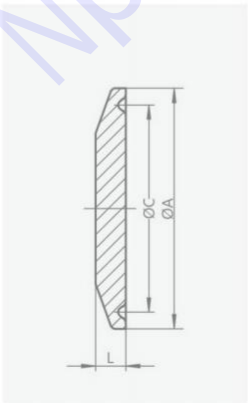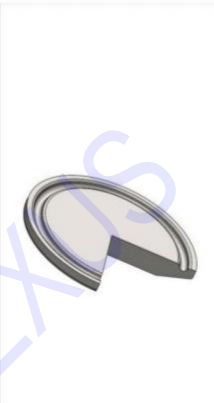



16AMP卡箍盲板 / 16AMP End Cap				
Size	A	ØC	E	L
1/4"-3/4"	25.2	-	3.6	5
1.0"-1.5"	50.5	43.5	2.85	6.3
2.0"	64	56.5	2.85	6.3
2.5"	77.5	70.5	2.85	6.3
3.0"	91	83.5	2.85	6.3
4.0"	119	110	2.85	7.9
6.0"	166.9	156.4	5.58	11.1
8.0"	217.7	207.2	5.58	11.1
10.0"	268.5	258	5.58	11.1

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified

产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA



45°焊式弯头 / 45° Weld Elbow					
Size	ØD	L	R	H	T
1/2"	12.7	37.9	19.1	69.2	1.6
3/4"	19.1	41.9	28.6	78.2	1.6
1.0"	25.4	45.8	38.1	87.1	1.6
1.25"	31.8	49.8	47.7	96.2	1.6
1.5"	38.1	53.7	57.2	105	1.6
2.0"	50.8	61.6	76.2	123.1	1.6
2.5"	63.5	69.5	95.3	140.8	1.6
3.0"	76.2	77.3	114.3	158.9	1.6
4.0"	101.6	93.1	152.4	194.9	2

PRODUCT IMAGE + TECHNICAL DATA




90°焊式短弯头 / 90° Weld Short Elbow				
Size	ØD	L	R	T
1/2"	12.7	19.1	19.1	1.6
3/4"	19.1	28.6	28.6	1.6
1.0"	25.4	38.1	38.1	1.6
1.25"	31.8	47.7	47.7	1.6
1.5"	38.1	57.2	57.2	1.6
2.0"	50.8	76.2	76.2	1.6
2.5"	63.5	95.3	95.3	1.6
3.0"	76.2	114.3	114.3	1.6
4.0"	101.6	152.4	152.4	2
5.0"	127	190.5	190.5	2.77
6.0"	152.4	228.6	228.6	2.77
8.0"	203.2	304.8	304.8	2.77

PRODUCT IMAGE + TECHNICAL DATA



90°焊式长弯头 / 90° Weld Long Elbow				
Size	ØD	L	R	T
1/2"	12.7	49.1	19.1	1.6
3/4"	19.1	58.6	28.6	1.6
1.0"	25.4	68.1	38.1	1.6
1.25"	31.8	77.7	47.7	1.6
1.5"	38.1	87.2	57.2	1.6
2.0"	50.8	106.2	76.2	1.6
2.5"	63.5	125.3	95.3	1.6
3.0"	76.2	144.3	114.3	1.6
4.0"	101.6	182.4	152.4	2
5.0"	127	230.5	190.5	2.77
6.0"	152.4	268.6	228.5	2.77
8.0"	203.2	344.8	304.8	2.77

PRODUCT IMAGE + TECHNICAL DATA




焊式U型弯头 (加直端) / 180° Weld Elbow (With Straight End)					
Size	ØD	L	R	H	T
1.0"	25.4	76.2	38.1	68.1	1.6
1.5"	38.1	114.4	57.2	87.2	1.6
2.0"	50.8	152.4	76.2	106.2	1.6
2.5"	63.5	190.6	95.3	125.3	1.6
3.0"	76.2	228.6	114.3	144.3	1.6
4.0"	101.6	304.8	152.4	182.4	2

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified



产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA





焊式等径平口三通 / Weld Equal Tee Without Straight End				
Size	ØD	L	L1	T
1/2"	12.7	38.2	8.4	1.6
3/4"	19.1	57.2	11.6	1.6
1.0"	25.4	76.2	14.7	1.6
1.25"	31.8	95.4	17.9	1.6
1.5"	38.1	114.4	21	1.6
2.0"	50.8	152.4	27.4	1.6
2.5"	63.5	190.6	33.8	1.6
3.0"	76.2	228.6	40.1	1.6
4.0"	101.6	304.8	52.8	2

PRODUCT IMAGE + TECHNICAL DATA



焊式等径短三通 / Weld Short Equal Tee				
Size	ØD	L	L1	T
1/2"	12.7	38.2	19.1	1.6
3/4"	19.1	57.2	28.6	1.6
1.0"	25.4	76.2	38.1	1.6
1.25"	31.8	95.4	47.7	1.6
1.5"	38.1	114.4	57.2	1.6
2.0"	50.8	152.4	76.2	1.6
2.5"	63.5	190.6	95.3	1.6
3.0"	76.2	228.6	114.3	1.6
4.0"	101.6	304.8	152.4	2
5.0"	127	381	190.5	2.77
6.0"	152.4	457.2	228.6	2.77
8.0"	203.2	609.6	304.8	2.77

PRODUCT IMAGE + TECHNICAL DATA



焊式等径长三通 / Weld Long Equal Tee				
Size	ØD	L	L1	T
1/2"	12.7	98.2	49.1	1.6
3/4"	19.1	117.2	58.6	1.6
1.0"	25.4	136.2	68.1	1.6
1.25"	31.8	155.4	77.7	1.6
1.5"	38.1	174.4	87.2	1.6
2.0"	50.8	212.4	106.2	1.6
2.5"	63.5	250.6	125.3	1.6
3.0"	76.2	288.6	144.3	1.6
4.0"	101.6	364.8	182.4	2
5.0"	127	461	230.5	2.77
6.0"	152.4	537.2	268.6	2.77
8.0"	203.2	689.6	344.8	2.77

PRODUCT DATA / 产品图与参数


Clean connection, clearly specified

产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA




焊式偏心大小头 / Weld Eccentric Reducer						
Size	ØD	Ød	L	T	T1	
1.0"x3/4"	25.4	19.1	25.4	1.6	1.6	
1.5"x1.25"	38.1	31.8	38.1	1.6	1.6	
1.5"x1.0"	38.1	25.4	38.1	1.6	1.6	
2.0"x3/4"	50.8	19.1	50.8	1.6	1.6	
2.0"x1.0"	50.8	25.4	50.8	1.6	1.6	
2.0"x1.25"	50.8	31.8	50.8	1.6	1.6	
2.0"x1.5"	50.8	38.1	50.8	1.6	1.6	
2.5"x1.0"	63.5	25.4	63.5	1.6	1.6	
2.5"x1.5"	63.5	38.1	63.5	1.6	1.6	
2.5"x2.0"	63.5	50.8	63.5	1.6	1.6	
3.0"x1.0"	76.2	25.4	76.2	1.6	1.6	
3.0"x1.5"	76.2	38.1	76.2	1.6	1.6	
3.0"x2.0"	76.2	50.8	76.2	1.6	1.6	
3.0"x2.5"	76.2	63.5	76.2	1.6	1.6	
4.0"x2.0"	101.6	50.8	101.6	2	1.6	
4.0"x2.5"	101.6	63.5	101.6	2	1.6	
4.0"x3.0"	101.6	76.2	101.6	2	1.6	
5.0"x3.0"	127	76.2	127	2	1.6	
5.0"x4.0"	127	101.6	127	2	2	
6.0"x2.0"	152.4	50.8	152.4	2	1.6	
6.0"x2.5"	152.4	63.5	152.4	2	1.6	
6.0"x3.0"	152.4	76.2	152.4	2	1.6	
6.0"x4.0"	152.4	101.6	152.4	2	2	
6.0"x5.0"	152.4	127	152.4	2	2	




PRODUCT IMAGE + TECHNICAL DATA



焊式同心大小头 / Weld Eccentric Reducer						
Size	ØD	Ød	L	T	T1	
3/4"x1/2"	19.1	12.7	19.1	1.6	1.6	
1.0"x1/2"	25.4	12.7	25.4	1.6	1.6	
1.0"x3/4"	25.4	19.1	25.4	1.6	1.6	
1.25"x3/4"	31.8	19.1	31.8	1.6	1.6	
1.25"x1.0"	31.8	25.4	31.8	1.6	1.6	
1.5"x3/4"	38.1	19.1	38.1	1.6	1.6	
1.5"x1.0"	38.1	25.4	38.1	1.6	1.6	
1.5"x1.25"	38.1	31.8	38.1	1.6	1.6	
2.0"x1/2"	50.8	12.7	50.8	1.6	1.6	
2.0"x3/4"	50.8	19.1	50.8	1.6	1.6	
2.0"x1.0"	50.8	25.4	50.8	1.6	1.6	
2.0"x1.25"	50.8	31.8	50.8	1.6	1.6	
2.0"x1.5"	50.8	38.1	50.8	1.6	1.6	
2.5"x1.0"	63.5	25.4	63.5	1.6	1.6	
2.5"x1.25"	63.5	31.8	63.5	1.6	1.6	
2.5"x1.5"	63.5	38.1	63.5	1.6	1.6	
2.5"x2.0"	63.5	50.8	63.5	1.6	1.6	
3.0"x1.0"	76.2	25.4	76.2	1.6	1.6	
3.0"x1.25"	76.2	31.8	76.2	1.6	1.6	
3.0"x1.5"	76.2	38.1	76.2	1.6	1.6	
3.0"x2.0"	76.2	50.8	76.2	1.6	1.6	
3.0"x2.5"	76.2	63.5	76.2	1.6	1.6	
4.0"x1.0"	101.6	25.4	101.6	2	1.6	
4.0"x1.25"	101.6	31.8	101.6	2	1.6	
4.0"x1.5"	101.6	38.1	101.6	2	1.6	
4.0"x2.0"	101.6	50.8	101.6	2	1.6	
4.0"x2.5"	101.6	63.5	101.6	2	1.6	
4.0"x3.0"	101.6	76.2	101.6	2	1.6	
5.0"x2.0"	127	50.8	127	2	1.6	
5.0"x3.0"	127	76.2	127	2	1.6	
5.0"x4.0"	127	101.6	127	2	2	
6.0"x3.0"	152.4	76.2	152.4	2	2	





PRODUCT IMAGE + TECHNICAL DATA



9WS焊式等径短四通 / Weld Short 4 Way Equal Cross					
Size	ØD	L	L1	T	
1/2"	12.7	38.2	19.1		
3/4"	19.1	57.2	28.6		
1.0"	25.4	76.2	38.1		
1.25"	31.8	95.4	47.7		
1.5"	38.1	114.0	57.0		1.6
2.0"	50.8	152.4	76.2		
2.5"	63.5	190.0	95.0		
3.0"	76.2	288.4	144.2		
4.0"	101.6	304.8	152.4		2.0

PRODUCT IMAGE + TECHNICAL DATA




9W焊式等径长四通 / Weld Long 4 Way Equal Cross					
Size	ØD	L	L1	T	
1/2"	12.7	98.2	49.1		
3/4"	19.1	117.2	58.6		
1.0"	25.4	136.2	68.1		
1.25"	31.8	155.4	77.7		
1.5"	38.1	174.2	87.2		1.6
2.0"	50.8	212.4	106.2		
2.5"	63.5	250.6	125.3		
3.0"	76.2	288.6	144.3		
4.0"	101.6	364.8	182.4		2.0

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified



产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

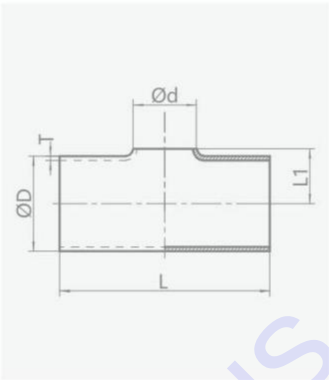

焊式变径平口短三通 / Weld Reducing Tee Without Straight End					
Size	ØD	Ød	L	L1	T
1.5"x1.0"	38.1	25.4	114.0	21.0	1.6
2.0"x1.0"	50.8	25.4	152.4	27.4	
2.0"x1.5"	50.8	38.1	152.4	27.4	
2.5"x1.5"	63.5	38.1	190.0	33.8	
2.5"x2.0"	63.5	50.8	190.0	33.8	
3.0"x1.5"	76.2	38.1	288.4	40.1	
3.0"x2.0"	76.2	50.8	288.4	40.1	
3.0"x2.5"	76.2	63.5	288.4	40.1	2.0
4.0"x2.0"	101.6	50.8	304.8	52.8	
4.0"x2.5"	101.6	63.5	304.8	52.8	
4.0"x3.0"	101.6	76.2	304.8	52.8	

PRODUCT IMAGE + TECHNICAL DATA

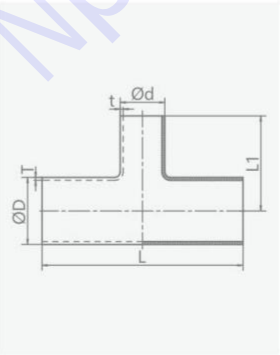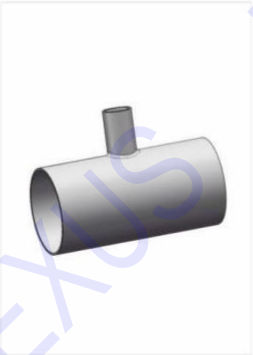


焊式变径长三通 / Weld Long Reducing Tee					
Size	ØD	Ød	L	L1	T
1.5"x1.0"	38.1	25.4	174.2	87.1	1.6
2.0"x1.0"	50.8	25.4	212.4	106.2	1.6
2.0"x1.5"	50.8	38.1	212.4	106.2	1.6
2.5"x1.5"	63.5	38.1	250.6	125.3	1.6
2.5"x2.0"	63.5	50.8	250.6	125.3	1.6
3.0"x1.5"	76.2	38.1	288.6	144.3	1.6
3.0"x2.0"	76.2	50.8	288.6	144.3	1.6
3.0"x2.5"	76.2	63.5	288.6	144.3	1.6
4.0"x2.0"	101.6	50.8	364.8	182.4	2.0
4.0"x2.5"	101.6	63.5	364.8	182.4	2.0
4.0"x3.0"	101.6	76.2	364.8	182.4	2.0

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified

产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA



90°焊式长弯头 / 90° Weld Long Elbow

Size	ØD	L	T	R
1/2"	12.7	76.2	1.65	19.1
3/4"	19.1	76.2	1.65	28.5
1.0"	25.4	76.2	1.65	38.1
1.5"	38.1	95.3	1.65	57.2
2.0"	50.8	120.7	1.65	76.2
2.5"	63.5	139.7	1.65	95.3
3.0"	76.2	158.8	1.65	114.3
4.0"	101.6	203.2	2.1	152.4
6.0"	152.4	292.1	2.77	228.6


PRODUCT IMAGE + TECHNICAL DATA



45°焊式长弯头 / 45° Weld Long Elbow

Size	ØD	L	T	R
1/2"	12.7	57.2	1.65	19.1
3/4"	19.1	57.2	1.65	28.5
1.0"	25.4	57.2	1.65	38.1
1.5"	38.1	63.5	1.65	57.2
2.0"	50.8	76.2	1.65	76.2
2.5"	63.5	85.7	1.65	95.3
3.0"	76.2	92.1	1.65	114.3
4.0"	101.6	114.3	2.1	152.4
6.0"	152.4	158.8	2.77	288.6


PRODUCT IMAGE + TECHNICAL DATA



焊式等径三通 / Weld Equal Tee

Size	ØD	L	T
1/2"	12.7	95.2	1.65
3/4"	19.1	101.6	1.65
1.0"	25.4	108	1.65
1.5"	38.1	120.6	1.65
2.0"	50.8	146	1.65
2.5"	63.5	158.8	1.65
3.0"	76.2	171.4	1.65
4.0"	101.6	209.6	2.1
6.0"	152.4	285.8	2.77

PRODUCT IMAGE + TECHNICAL DATA



焊式等径四通 / Weld 4 Way Equal Cross


Size	ØD	L	T
1/2"	12.7	95.2	1.65
3/4"	19.1	101.6	1.65
1.0"	25.4	108	1.65
1.5"	38.1	120.6	1.65
2.0"	50.8	146	1.65
2.5"	63.5	158.8	1.65
3.0"	76.2	171.4	1.65
4.0"	101.6	209.6	2.1
6.0"	152.4	285.8	2.77

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified


产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

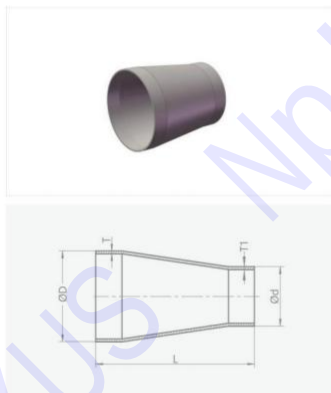


Size	OD	ID	L	T	T1
3/4"x1/2"	19.1	12.7	101.6	1.65	1.65
1.0"x1/2"	25.4	12.7	114.3	1.65	1.65
1.0"x3/4"	25.4	19.1	101.6	1.65	1.65
1.5"x1/2"	38.1	12.7	139.7	1.65	1.65
1.5"x3/4"	38.1	19.1	127	1.65	1.65
1.5"x1.0"	38.1	25.4	127	1.65	1.65
2.0"x1/2"	50.8	12.7	196.9	1.65	1.65
2.0"x3/4"	50.8	19.1	184.2	1.65	1.65
2.0"x1.0"	50.8	25.4	184.2	1.65	1.65
2.0"x1.5"	50.8	38.1	133.4	1.65	1.65
2.5"x1.5"	63.5	38.1	184.2	1.65	1.65
2.5"x2.0"	63.5	50.8	139.7	1.65	1.65
3.0"x1.5"	76.2	38.1	235	1.65	1.65
3.0"x2.0"	76.2	50.8	190.5	1.65	1.65
3.0"x2.5"	76.2	63.5	139.7	1.65	1.65
4.0"x1.5"	101.6	38.1	342.9	2.1	1.65
4.0"x2.0"	101.6	50.8	298.5	2.1	1.65
4.0"x2.5"	101.6	63.5	247.7	2.1	1.65
4.0"x3.0"	101.6	76.2	196.9	2.1	1.65
6.0"x3.0"	152.4	76.2	254	2.77	1.65
6.0"x4.0"	152.4	101.6	254	2.77	2.1

PRODUCT IMAGE + TECHNICAL DATA

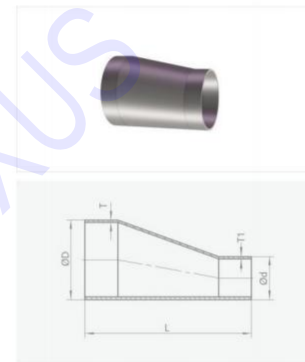

Size	OD	ID	L	T	T1
3/4"x1/2"	19.1	12.7	101.6	1.65	1.65
1.0"x1/2"	25.4	12.7	114.3	1.65	1.65
1.0"x3/4"	25.4	19.1	101.6	1.65	1.65
1.5"x1/2"	38.1	12.7	139.7	1.65	1.65
1.5"x3/4"	38.1	19.1	127	1.65	1.65
1.5"x1.0"	38.1	25.4	127	1.65	1.65
2.0"x1/2"	50.8	12.7	196.9	1.65	1.65
2.0"x3/4"	50.8	19.1	184.2	1.65	1.65
2.0"x1.0"	50.8	25.4	184.2	1.65	1.65
2.0"x1.5"	50.8	38.1	133.4	1.65	1.65
2.5"x1.5"	63.5	38.1	184.2	1.65	1.65
2.5"x2.0"	63.5	50.8	139.7	1.65	1.65
3.0"x1.5"	76.2	38.1	235	1.65	1.65
3.0"x2.0"	76.2	50.8	190.5	1.65	1.65
3.0"x2.5"	76.2	63.5	139.7	1.65	1.65
4.0"x1.5"	101.6	38.1	342.9	2.1	1.65
4.0"x2.0"	101.6	50.8	298.5	2.1	1.65
4.0"x2.5"	101.6	63.5	247.7	2.1	1.65
4.0"x3.0"	101.6	76.2	196.9	2.1	1.65
6.0"x3.0"	152.4	76.2	254	2.77	1.65
6.0"x4.0"	152.4	101.6	254	2.77	2.1

PRODUCT IMAGE + TECHNICAL DATA

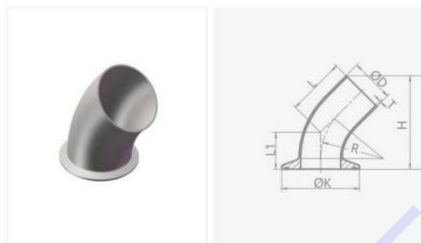

Size	OD	ID	L	L1	R	H	T
1/2"	12.7	25.2	57.2	25.4	19.1	79.6	1.65
3/4"	19.1	25.2	57.2	25.4	28.5	81.9	1.65
1.0"	25.4	50.5	57.2	28.6	38.1	86.3	1.65
1.5"	38.1	50.5	63.5	36.5	57.2	103	1.65
2.0"	50.8	64	76.2	44.5	76.2	125.6	1.65
2.5"	63.5	77.5	85.7	52.4	95.25	145.1	1.65
3.0"	76.2	91	92.1	60.3	114.3	161.6	1.65
4.0"	101.6	119	114.3	79.4	152.4	206.3	2.1
6.0"	152.4	166.87	158.8	133.4	228.6	299.5	2.77

PRODUCT IMAGE + TECHNICAL DATA




Size	OD	L	L1	R	T
1/2"	12.7	76.2	41.3	19.1	1.65
3/4"	19.1	76.2	41.3	28.5	1.65
1.0"	25.4	76.2	50.8	38.1	1.65
1.5"	38.1	95.3	69.9	57.2	1.65
2.0"	50.8	120.7	88.9	76.2	1.65
2.5"	63.5	139.7	108	95.3	1.65
3.0"	76.2	158.5	127	114.3	1.65
4.0"	101.6	203.2	168.3	152.4	2.1
6.0"	152.4	292.1	266.7	228.6	2.77

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified


产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

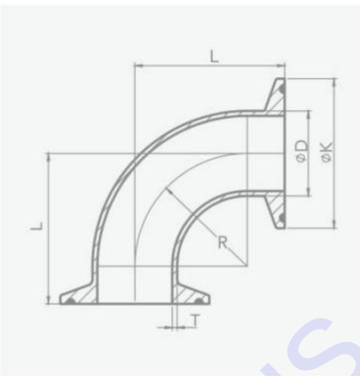

90°夹式弯头/ 90° Clamp Elbow					
Size	ØD	ØK	L	R	T
1/2"	12.7	25.2	41.3	19.1	1.65
3/4"	19.1	25.2	41.3	28.5	1.65
1.0"	25.4	50.5	50.8	38.1	1.65
1.5"	38.1	50.5	69.9	57.2	1.65
2.0"	50.8	64	88.9	76.2	1.65
2.5"	63.5	77.5	108	95.3	1.65
3.0"	76.2	91	127	114.3	1.65
4.0"	101.6	119	168.3	152.4	2.1
6.0"	152.4	166.87	266.7	228.6	2.77

PRODUCT IMAGE + TECHNICAL DATA




45°夹式弯头/ 45° Clamp Elbow					
Size	ØD	ØK	R	L	T
1/2"	12.7	25.2	19.1	25.4	1.65
3/4"	19.1	25.2	28.5	25.4	1.65
1.0"	25.4	50.5	38.1	28.6	1.65
1.5"	38.1	50.5	57.2	36.5	1.65
2.0"	50.8	64	76.2	44.5	1.65
2.5"	63.5	77.5	95.3	52.4	1.65
3.0"	76.2	91	114.3	60.3	1.65
4.0"	101.6	119	152.4	79.4	2.1
6.0"	152.4	166.87	228.6	133.4	2.77

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified



产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA




单夹式变径平口三通 / Short Outlet Weld-clamp Reducing Tee						
Size	ØD	Ød	L	L1	T	T1
3/4"x1/2"	19.1	12.7	101.6	24.3	1.65	1.65
1.0"x1/2"	25.4	12.7	108	27.4	1.65	1.65
1.0"x3/4"	25.4	19.1	108	27.4	1.65	1.65
1.5"x1/2"	38.1	12.7	120.6	33.8	1.65	1.65
1.5"x3/4"	38.1	19.1	120.6	33.8	1.65	1.65
1.5"x1.0"	38.1	25.4	120.6	33.8	1.65	1.65
2.0"x1/2"	50.8	12.7	146	40.1	1.65	1.65
2.0"x3/4"	50.8	19.1	146	40.1	1.65	1.65
2.0"x1.0"	50.8	25.4	146	40.1	1.65	1.65
2.0"x1.5"	50.8	38.1	146	40.1	1.65	1.65
2.5"x1/2"	63.5	12.7	158.8	46.5	1.65	1.65
2.5"x3/4"	63.5	19.1	158.8	46.5	1.65	1.65
2.5"x1.0"	63.5	25.4	158.8	46.5	1.65	1.65
2.5"x1.5"	63.5	38.1	158.8	46.5	1.65	1.65
2.5"x2.0"	63.5	50.8	158.8	46.5	1.65	1.65
3.0"x1/2"	76.2	12.7	171.4	52.8	1.65	1.65
3.0"x3/4"	76.2	19.1	171.4	52.8	1.65	1.65
3.0"x1.0"	76.2	25.4	171.4	52.8	1.65	1.65
3.0"x1.5"	76.2	38.1	171.4	52.8	1.65	1.65
3.0"x2.0"	76.2	50.8	171.4	52.8	1.65	1.65
3.0"x2.5"	76.2	63.5	171.4	52.8	1.65	1.65
4.0"x1.0"	101.6	25.4	209.6	68.6	2.1	1.65
4.0"x1.5"	101.6	38.1	209.6	68.6	2.1	1.65
4.0"x2.0"	101.6	50.8	209.6	68.6	2.1	1.65
4.0"x2.5"	101.6	63.5	209.6	68.6	2.1	1.65
4.0"x3.0"	101.6	76.2	209.6	68.6	2.1	1.65

PRODUCT IMAGE + TECHNICAL DATA




单夹式等径平口三通 / Short Outlet Weld-clamp Equal Tee					
Size	ØD	ØK	L	L1	T
1/2"	12.7	25.2	95.2	21	1.65
3/4"	19.1	25.2	101.6	24.3	1.65
1.0"	25.4	50.5	108	27.4	1.65
1.5"	38.1	50.5	120.6	33.8	1.65
2.0"	50.8	64	146	40.1	1.65
2.5"	63.5	77.5	158.8	46.5	1.65
3.0"	76.2	91	171.4	52.8	1.65
4.0"	101.6	119	209.6	68.6	2.1
6.0"	152.4	166.8	285.8	99.7	2.77

PRODUCT IMAGE + TECHNICAL DATA



夹式等径三通 / Clamp Equal Tee				
Size	ØD	L	L1	T
1/2"	12.7	114.4	57.2	1.65
3/4"	19.1	120.6	60.3	1.65
1.0"	25.4	133.4	66.7	1.65
1.5"	38.1	146	73	1.65
2.0"	50.8	171.4	85.7	1.65
2.5"	63.5	184.2	92.1	1.65
3.0"	76.2	196.8	98.4	1.65
4.0"	101.6	241.4	120.7	2.1
6.0"	152.4	362.0	181.0	2.77

PRODUCT IMAGE + TECHNICAL DATA




夹式等径四通 / Clamp 4 Way Equal Cross				
Size	ØD	L	L1	T
1/2"	12.7	114.4	57.2	1.65
3/4"	19.1	120.6	60.3	1.65
1.0"	25.4	133.4	66.7	1.65
1.5"	38.1	146	73	1.65
2.0"	50.8	171.4	85.7	1.65
2.5"	63.5	184.2	92.1	1.65
3.0"	76.2	196.8	98.4	1.65
4.0"	101.6	241.4	120.7	2.1
6.0"	152.4	362.0	181.0	2.77

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified


产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

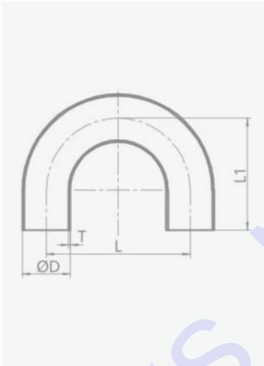

焊式U型弯头/ 180° Weld Elbow (U-Type)				
Size	ØD	L	L1	T
1/2"	12.7	114.3	76.2	1.65
3/4"	19.1	114.3	76.2	1.65
1.0"	25.4	76.2	76.2	1.65
1.5"	38.1	114.3	114.3	1.65
2.0"	50.8	152.4	127	1.65
2.5"	63.5	190.5	146.1	1.65
3.0"	76.2	228.6	165.1	1.65
4.0"	101.6	304.8	215.9	2.1
6.0"	152.4	457.2	292.1	2.77

PRODUCT IMAGE + TECHNICAL DATA




夹式U型弯头/180° Clamp Elbow (U-Type)				
Size	ØD	L	L1	T
1/2"	12.7	114.3	88.9	1.65
3/4"	19.1	114.3	88.9	1.65
1.0"	25.4	76.2	88.9	1.65
1.5"	38.1	114.3	127	1.65
2.0"	50.8	152.4	139.7	1.65
2.5"	63.5	190.5	158.8	1.65
3.0"	76.2	228.6	177.8	1.65
4.0"	101.6	304.8	231.7	2.1
6.0"	152.4	457.2	313.6	2.77

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified


产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

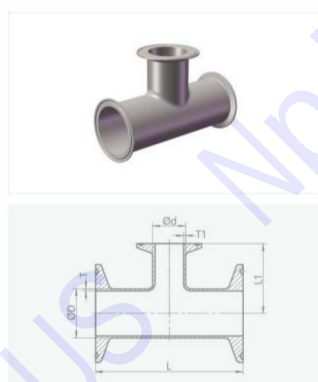


Size	ØD	Ød	L	L1	T	T1
3/4"x1/2"	19.1	12.7	127	63.5	1.65	1.65
1.0"x1/2"	25.4	12.7	133.4	66.7	1.65	1.65
1.0"x3/4"	25.4	19.1	133.4	66.7	1.65	1.65
1.5"x1/2"	38.1	12.7	146	73	1.65	1.65
1.5"x3/4"	38.1	19.1	146	73	1.65	1.65
1.5"x1.0"	38.1	25.4	146	73	1.65	1.65
2.0"x1.0"	50.8	25.4	171.4	79.4	1.65	1.65
2.0"x1.5"	50.8	38.1	171.4	79.4	1.65	1.65
2.5"x1.0"	63.5	25.4	184.2	85.7	1.65	1.65
2.5"x1.5"	63.5	38.1	184.2	85.7	1.65	1.65
2.5"x2.0"	63.5	50.8	184.2	85.7	1.65	1.65
3.0"x1.0"	76.2	25.4	196.8	92.1	1.65	1.65
3.0"x1.5"	76.2	38.1	196.8	92.1	1.65	1.65
3.0"x2.0"	76.2	50.8	196.8	92.1	1.65	1.65
3.0"x2.5"	76.2	63.5	196.8	92.1	1.65	1.65
4.0"x1.0"	101.6	25.4	241.4	104.8	2.1	1.65
4.0"x1.5"	101.6	38.1	241.4	104.8	2.1	1.65
4.0"x2.0"	101.6	50.8	241.4	111.1	2.1	1.65
4.0"x2.5"	101.6	63.5	241.4	111.1	2.1	1.65
4.0"x3.0"	101.6	76.2	241.4	111.1	2.1	1.65

PRODUCT IMAGE + TECHNICAL DATA

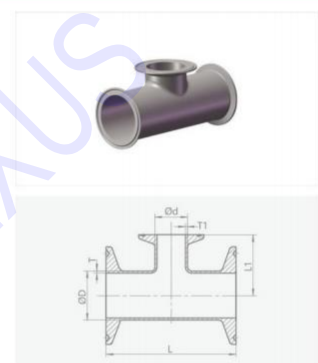

Size	ØD	Ød	L	L1	T	T1
3/4"x1/2"	19.1	12.7	127	24.3	1.65	1.65
1.0"x1/2"	25.4	12.7	133.4	27.4	1.65	1.65
1.0"x3/4"	25.4	19.1	133.4	27.4	1.65	1.65
1.5"x1/2"	38.1	12.7	146	33.8	1.65	1.65
1.5"x3/4"	38.1	19.1	146	33.8	1.65	1.65
1.5"x1.0"	38.1	25.4	146	33.8	1.65	1.65
2.0"x1.0"	50.8	25.4	171.4	40.1	1.65	1.65
2.0"x1.5"	50.8	38.1	171.4	40.1	1.65	1.65
2.5"x1.0"	63.5	25.4	184.2	46.5	1.65	1.65
2.5"x1.5"	63.5	38.1	184.2	46.5	1.65	1.65
2.5"x2.0"	63.5	50.8	184.2	46.5	1.65	1.65
3.0"x1.0"	76.2	25.4	196.8	52.8	1.65	1.65
3.0"x1.5"	76.2	38.1	196.8	52.8	1.65	1.65
3.0"x2.0"	76.2	50.8	196.8	52.8	1.65	1.65
3.0"x2.5"	76.2	63.5	196.8	52.8	1.65	1.65
4.0"x1.0"	101.6	25.4	241.4	68.6	2.1	1.65
4.0"x1.5"	101.6	38.1	241.4	68.6	2.1	1.65
4.0"x2.0"	101.6	50.8	241.4	68.6	2.1	1.65
4.0"x2.5"	101.6	63.5	241.4	68.6	2.1	1.65
4.0"x3.0"	101.6	76.2	241.4	68.6	2.1	1.65

PRODUCT IMAGE + TECHNICAL DATA

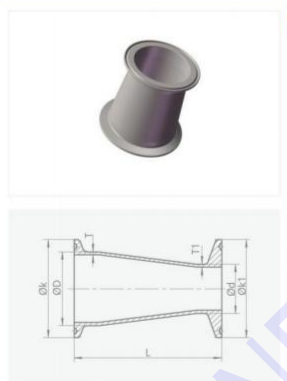

Size	ØD	Ød	Øk	Øk1	L	T	T1
3/4"x1/2"	19.1	12.7	25.2	25.2	50.8	1.65	1.65
1.0"x1/2"	25.4	12.7	50.5	25.2	63.5	1.65	1.65
1.0"x3/4"	25.4	19.1	50.5	25.2	50.8	1.65	1.65
1.5"x1/2"	38.1	12.7	50.5	25.2	88.9	1.65	1.65
1.5"x3/4"	38.1	19.1	50.5	25.2	76.2	1.65	1.65
1.5"x1.0"	38.1	25.4	50.5	50.5	76.2	1.65	1.65
2.0"x1.0"	50.8	25.4	64	50.5	127	1.65	1.65
2.0"x1.5"	50.8	38.1	64	50.5	76.2	1.65	1.65
2.5"x1.0"	63.5	25.4	77.5	50.5	177.8	1.65	1.65
2.5"x1.5"	63.5	38.1	77.5	50.5	127	1.65	1.65
2.5"x2.0"	63.5	50.8	77.5	64	76.2	1.65	1.65
3.0"x1.0"	76.2	25.4	91	50.5	228.6	1.65	1.65
3.0"x1.5"	76.2	38.1	91	50.5	177.8	1.65	1.65
3.0"x2.0"	76.2	50.8	91	64	127	1.65	1.65
3.0"x2.5"	76.2	63.5	91	77.5	76.2	1.65	1.65
4.0"x1.5"	101.6	38.1	119	50.5	282.6	2.1	1.65
4.0"x2.0"	101.6	50.8	119	64	231.8	2.1	1.65
4.0"x2.5"	101.6	63.5	119	77.5	181	2.1	1.65
4.0"x3.0"	101.6	76.2	119	91	130.2	2.1	1.65

PRODUCT IMAGE + TECHNICAL DATA




Size	ØD	Ød	Øk	Øk1	L	T	T1
3/4"x1/2"	19.1	12.7	25.2	25.2	50.8	1.65	1.65
1.0"x1/2"	25.4	12.7	50.5	25.2	63.5	1.65	1.65
1.0"x3/4"	25.4	19.1	50.5	25.2	50.8	1.65	1.65
1.5"x1/2"	38.1	12.7	50.5	25.2	88.9	1.65	1.65
1.5"x3/4"	38.1	19.1	50.5	25.2	76.2	1.65	1.65
1.5"x1.0"	38.1	25.4	50.5	50.5	76.2	1.65	1.65
2.0"x1.0"	50.8	25.4	64	50.5	127	1.65	1.65
2.0"x1.5"	50.8	38.1	64	50.5	76.2	1.65	1.65
2.5"x1.0"	63.5	25.4	77.5	50.5	177.8	1.65	1.65
2.5"x1.5"	63.5	38.1	77.5	50.5	127	1.65	1.65
2.5"x2.0"	63.5	50.8	77.5	64	76.2	1.65	1.65
3.0"x1.0"	76.2	25.4	91	50.5	228.6	1.65	1.65
3.0"x1.5"	76.2	38.1	91	50.5	177.8	1.65	1.65
3.0"x2.0"	76.2	50.8	91	64	127	1.65	1.65
3.0"x2.5"	76.2	63.5	91	77.5	76.2	1.65	1.65
4.0"x1.5"	101.6	38.1	119	50.5	282.6	2.1	1.65
4.0"x2.0"	101.6	50.8	119	64	231.8	2.1	1.65
4.0"x2.5"	101.6	63.5	119	77.5	181	2.1	1.65
4.0"x3.0"	101.6	76.2	119	91	130.2	2.1	1.65

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified


产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

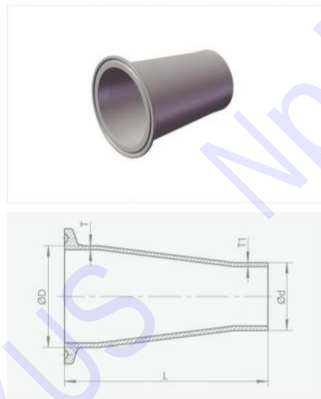

焊夹式同心大小头(加直端)/Clamp-weld Concentric Reducer (With Straight End)					
Size	OD	ID	L	T	T1
3/4"x1/2"	19.1	12.7	76.2	1.65	1.65
1.0"x1/2"	25.4	12.7	88.9	1.65	1.65
1.0"x3/4"	25.4	19.1	76.2	1.65	1.65
1.5"x1/2"	38.1	12.7	114.3	1.65	1.65
1.5"x3/4"	38.1	19.1	101.6	1.65	1.65
1.5"x1.0"	38.1	25.4	101.6	1.65	1.65
2.0"x1/2"	50.8	12.7	165.1	1.65	1.65
2.0"x3/4"	50.8	19.1	152.4	1.65	1.65
2.0"x1.0"	50.8	25.4	152.4	1.65	1.65
2.0"x1.5"	50.8	38.1	101.6	1.65	1.65
2.5"x1.5"	63.5	38.1	152.4	1.65	1.65
2.5"x2.0"	63.5	50.8	107.9	1.65	1.65
3.0"x1.5"	76.2	38.1	203.2	1.65	1.65
3.0"x2.0"	76.2	50.8	158.8	1.65	1.65
3.0"x2.5"	76.2	63.5	108	1.65	1.65
4.0"x1.5"	101.6	38.1	308	2.1	1.65
4.0"x2.0"	101.6	50.8	263.5	2.1	1.65
4.0"x2.5"	101.6	63.5	212.7	2.1	1.65
4.0"x3.0"	101.6	76.2	161.9	2.1	1.65

PRODUCT IMAGE + TECHNICAL DATA

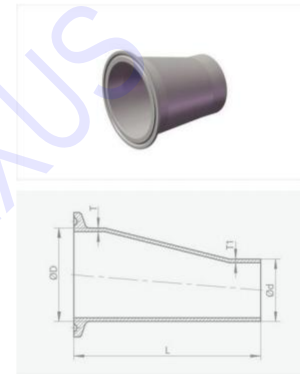

焊夹式偏心大小头(加直端)/Clamp-weld Eccentric Reducer (With Straight End)					
Size	OD	ID	L	T	T1
3/4"x1/2"	19.1	12.7	76.2	1.65	1.65
1.0"x1/2"	25.4	12.7	88.9	1.65	1.65
1.0"x3/4"	25.4	19.1	76.2	1.65	1.65
1.5"x1/2"	38.1	12.7	114.3	1.65	1.65
1.5"x3/4"	38.1	19.1	101.6	1.65	1.65
1.5"x1.0"	38.1	25.4	101.6	1.65	1.65
2.0"x1/2"	50.8	12.7	165.1	1.65	1.65
2.0"x3/4"	50.8	19.1	152.4	1.65	1.65
2.0"x1.0"	50.8	25.4	152.4	1.65	1.65
2.0"x1.5"	50.8	38.1	101.6	1.65	1.65
2.5"x1.5"	63.5	38.1	152.4	1.65	1.65
2.5"x2.0"	63.5	50.8	108	1.65	1.65
3.0"x1.5"	76.2	38.1	203.2	1.65	1.65
3.0"x2.0"	76.2	50.8	158.8	1.65	1.65
3.0"x2.5"	76.2	63.5	108	1.65	1.65
4.0"x1.5"	101.6	38.1	308	2.1	1.65
4.0"x2.0"	101.6	50.8	263.5	2.1	1.65
4.0"x2.5"	101.6	63.5	212.7	2.1	1.65
4.0"x3.0"	101.6	76.2	161.9	2.1	1.65

PRODUCT IMAGE + TECHNICAL DATA



单夹式变径平口四通 / Short Outlet Single Clamp-Weld 4-Way Reducing Cross					
Size	OD	ID	L	L1	T
1.0"x1/2"	12.7	25.4	127	27.4	1.65
1.0"x3/4"	19.1	25.4	127	27.4	1.65
1.5"x1/2"	12.7	38.1	127	33.8	1.65
1.5"x3/4"	19.1	38.1	127	33.8	1.65
1.5"x1.0"	25.4	38.1	127	33.8	1.65
2.0"x1/2"	12.7	50.8	199.8	40.1	1.65
2.0"x3/4"	19.1	50.8	199.8	40.1	1.65
2.0"x1.0"	25.4	50.8	199.8	40.1	1.65
2.0"x1.5"	38.1	50.8	199.8	40.1	1.65
2.5"x1/2"	12.7	63.5	170	46.5	1.65
2.5"x3/4"	19.1	63.5	170	46.5	1.65
2.5"x1.0"	25.4	63.5	170	46.5	1.65
2.5"x1.5"	38.1	63.5	170	46.5	1.65
2.5"x2.0"	50.8	63.5	170	46.5	1.65
3.0"x1/2"	12.7	76.2	180	52.8	1.65
3.0"x3/4"	19.1	76.2	180	52.8	1.65
3.0"x1.0"	25.4	76.2	180	52.8	1.65
3.0"x1.5"	38.1	76.2	180	52.8	1.65
3.0"x2.0"	50.8	76.2	180	52.8	1.65
3.0"x2.5"	63.5	76.2	180	52.8	1.65
4.0"x1/2"	12.7	101.6	220	68.6	1.65
4.0"x3/4"	19.1	101.6	220	68.6	2.1
4.0"x1.0"	25.4	101.6	220	68.6	2.1
4.0"x1.5"	38.1	101.6	220	68.6	2.1
4.0"x2.0"	50.8	101.6	220	68.6	2.1
4.0"x2.5"	63.5	101.6	220	68.6	2.1
4.0"x3.0"	76.2	101.6	220	68.6	2.1

PRODUCT IMAGE + TECHNICAL DATA




单夹式变径平口四通 / Short Outlet Single Clamp-Weld 4-Way Reducing Cross					
Size	OD	ID	L	L1	T
1.0"x1/2"	12.7	25.4	154	27.4	1.65
1.0"x3/4"	19.1	25.4	154	27.4	1.65
1.5"x1/2"	12.7	38.1	152.4	33.8	1.65
1.5"x3/4"	19.1	38.1	152.4	33.8	1.65
1.5"x1.0"	25.4	38.1	152.4	33.8	1.65
2.0"x1/2"	12.7	50.8	165.2	40.1	1.65
2.0"x3/4"	19.1	50.8	165.2	40.1	1.65
2.0"x1.0"	25.4	50.8	165.2	40.1	1.65
2.0"x1.5"	38.1	50.8	165.2	40.1	1.65
2.5"x1/2"	12.7	63.5	194	46.5	1.65
2.5"x3/4"	19.1	63.5	194	46.5	1.65
2.5"x1.0"	25.4	63.5	194	46.5	1.65
2.5"x1.5"	38.1	63.5	194	46.5	1.65
2.5"x2.0"	50.8	63.5	194	46.5	1.65
3.0"x1/2"	12.7	76.2	204	52.8	1.65
3.0"x3/4"	19.1	76.2	204	52.8	1.65
3.0"x1.0"	25.4	76.2	204	52.8	1.65
3.0"x1.5"	38.1	76.2	204	52.8	1.65
3.0"x2.0"	50.8	76.2	204	52.8	1.65
3.0"x2.5"	63.5	76.2	204	52.8	1.65
4.0"x1/2"	12.7	101.6	244	68.6	1.65
4.0"x3/4"	19.1	101.6	244	68.6	2.1
4.0"x1.0"	25.4	101.6	244	68.6	2.1
4.0"x1.5"	38.1	101.6	244	68.6	2.1
4.0"x2.0"	50.8	101.6	244	68.6	2.1
4.0"x2.5"	63.5	101.6	244	68.6	2.1
4.0"x3.0"	76.2	101.6	244	68.6	2.1

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified

产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

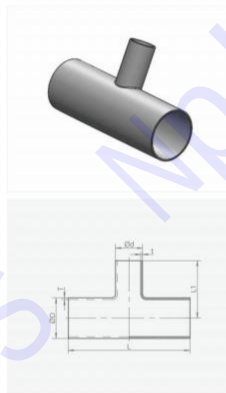

变径等径三通 / Weld Reducing Tee

Size	ØD	ØK	L	L1	T	1
1/2"	12.7	12.7	101.6	50.8		
1/2"	25.4	12.7	108	54		
3/4"	25.4	19.1	108	54		
1"	38.1	12.7	120.6	60.3		
1 1/4"	38.1	19.1	120.6	60.3		
1 1/2"	38.1	25.4	120.6	60.3		
2"	50.8	12.7	145.8	72.9		
2 1/2"	50.8	19.1	145.8	72.9		
3"	50.8	25.4	145.8	72.9		
3 1/2"	63.5	12.7	158.5	79.3	1.65	
4"	63.5	19.1	158.5	79.3		
4 1/2"	63.5	25.4	158.5	79.3		
5"	63.5	38.1	158.5	79.3	1.65	
5 1/2"	63.5	50.8	158.5	79.3		
6"	76.2	12.7	171.2	85.6		
6 1/2"	76.2	19.1	171.2	85.6		
7"	76.2	25.4	171.2	85.6		
7 1/2"	76.2	38.1	171.2	85.6		
8"	76.2	50.8	171.2	85.6		
8 1/2"	76.2	63.5	171.2	85.6		
9"	101.6	25.4	209.3	104.7		
9 1/2"	101.6	38.1	209.3	104.7		
10"	101.6	50.8	209.3	104.7		
10 1/2"	101.6	63.5	209.3	104.7		
11"	101.6	76.2	209.3	104.7		

PRODUCT IMAGE + TECHNICAL DATA



夹式等径平口三通 / Short Outlet Clamp Equal Tee

Size	ØD	ØK	L	L1	T
1/2"	12.7	25.2	114.4	21	
3/4"	19.1	25.2	120.6	24.3	
1.0"	25.4	50.5	133.4	27.4	
1.5"	38.1	50.5	146.0	33.8	1.65
2.0"	50.8	64	171.4	40.1	
2.5"	63.5	77.5	184.2	46.5	
3.0"	76.2	91	196.8	52.8	
4.0"	101.6	119	241.4	68.6	2.1
6.0"	152.4	166.8	362.0	99.7	2.77

PRODUCT IMAGE + TECHNICAL DATA



卡箍接头 / Ferrule

Size	ØA	ØB	ØD	L		
				系列I	系列II	系列III
1/2"	9.4	12.7	25.2	12.7	28.7	44.5
3/4"	15.8	19.1	25.2	12.7	28.7	44.5
1.0"	22.1	25.4	50.5	12.7	28.7	44.5
1.5"	34.8	38.1	50.5	12.7	28.7	44.5
2.0"	47.5	50.8	64	12.7	28.7	57.2
2.5"	60.2	63.5	77.5	12.7	28.7	57.2
3.0"	72.9	76.2	91	12.7	28.7	57.2
4.0"	97.4	101.6	119	15.8	28.7	57.2
6.0"	146.8	152.4	166.9	21.5	38.1	76.2

PRODUCT IMAGE + TECHNICAL DATA



卡箍盲板 / End Cap



Size	ØA	L
1/2"	25.2	5.0
3/4"	25.2	5.0
1.0"	50.5	6.4
1.5"	50.5	6.4
2.0"	64	6.4
2.5"	77.5	6.4
3.0"	91	6.4
4.0"	119	8.9

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified

产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA



45° 焊式长弯头 / 45° Weld Long Elbow				
Size	ØD	L	R	T
1.0"	25.4	43.5	38.1	1.65
1.5"	38.1	63.5	57.2	1.65
2.0"	50.8	88.5	76.2	1.65
2.5"	63.5	113.5	95.3	1.65
3.0"	76.2	133.5	114.3	1.65
4.0"	101.6	173.5	152.4	2.1

PRODUCT IMAGE + TECHNICAL DATA




90° 焊式短弯头 / 90° Weld Short Elbow				
Size	ØD	L	R	T
1.0"	25.4	43.5	38.1	1.65
1.5"	38.1	63.5	57.2	1.65
2.0"	50.8	88.5	76.2	1.65
2.5"	63.5	113.5	95.3	1.65
3.0"	76.2	133.5	114.3	1.65
4.0"	101.6	173.5	152.4	2.1

PRODUCT IMAGE + TECHNICAL DATA



90° 焊式长弯头 / 90° Weld Long Elbow				
Size	ØD	L	R	T
1/2"	12.7	45	19.1	1.65
3/4"	19.1	60	28.6	1.65
1.0"	25.4	65	38.1	1.65
1.5"	38.1	85	57.2	1.65
2.0"	50.8	110	76.2	1.65
2.5"	63.5	135	93.5	1.65
3.0"	76.2	155	114.3	1.65
4.0"	101.6	195	152.4	2.1

PRODUCT IMAGE + TECHNICAL DATA



焊式等径平口短三通 / Weld Short Equal Tee				
Size	ØD	L	L1	T
1.0"	25.4	87	14.7	1.65
1.5"	38.1	127	21	1.65
2.0"	50.8	177	27.4	1.65
2.5"	63.5	227	33.8	1.65
3.0"	76.2	267	40.1	1.65
4.0"	101.6	347	52.8	2.1

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified



产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA




焊式变径平口三通 / Weld Reducing Tee Without Straight End					
Size	OD	Od	L	L1	T
1.5"X1.0"	38.1	25.4	127	21	1.65
2.0"X1.0"	50.8	25.4	177	27.4	1.65
2.0"X1.5"	50.8	38.1	177	27.4	1.65
2.5"X1.0"	63.5	25.4	227	33.8	1.65
2.5"X1.5"	63.5	38.1	227	33.8	1.65
2.5"X2.0"	63.5	50.8	227	33.8	1.65
3.0"X1.0"	76.2	25.4	267	40.1	1.65
3.0"X1.5"	76.2	38.1	267	40.1	1.65
3.0"X2.0"	76.2	50.8	267	40.1	1.65
3.0"X2.5"	76.2	63.5	267	40.1	1.65
4.0"X2.0"	101.6	50.8	347	52.8	2.1
4.0"X2.5"	101.6	63.5	347	52.8	2.1
4.0"X3.0"	101.6	76.2	347	52.8	2.1

PRODUCT IMAGE + TECHNICAL DATA




焊式等径短三通 / Weld Equal Tee				
Size	OD	L	L1	T
1.0"	25.4	87	43.5	1.65
1.5"	38.1	127	63.5	1.65
2.0"	50.8	177	88.5	1.65
2.5"	63.5	227	113.5	1.65
3.0"	76.2	267	133.5	1.65
4.0"	101.6	347	173.5	2.1

PRODUCT IMAGE + TECHNICAL DATA



焊式等径长四通 / Weld Long 4 Way Equal Cross			
Size	OD	L	T
1.0"	25.4	130	1.65
1.5"	38.1	170	1.65
2.0"	50.8	220	1.65
2.5"	63.5	270	1.65
3.0"	76.2	310	1.65
4.0"	101.6	390	2.1

PRODUCT IMAGE + TECHNICAL DATA




焊式同心大小头 / Weld Concentric Reducer					
Size	OD	Od	L	T	T1
1.5"X1.0"	38.1	25.4	28	1.65	1.65
2.0"X1.0"	50.8	25.4	49	1.65	1.65
2.0"X1.5"	50.8	38.1	31	1.65	1.65
2.5"X1.0"	63.5	25.4	76	1.65	1.65
2.5"X1.5"	63.5	38.1	48	1.65	1.65
2.5"X2.0"	63.5	50.8	41	1.65	1.65
3.0"X1.0"	76.2	25.4	100	1.65	1.65
3.0"X1.5"	76.2	38.1	74	1.65	1.65
3.0"X2.0"	76.2	50.8	50	1.65	1.65
3.0"X2.5"	76.2	63.5	40	1.65	1.65
4.0"X1.5"	101.6	38.1	128	2.1	1.65
4.0"X2.0"	101.6	50.8	100	2.1	1.65
4.0"X2.5"	101.6	63.5	75	2.1	1.65
4.0"X3.0"	101.6	76.2	51	2.1	1.65

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified

产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

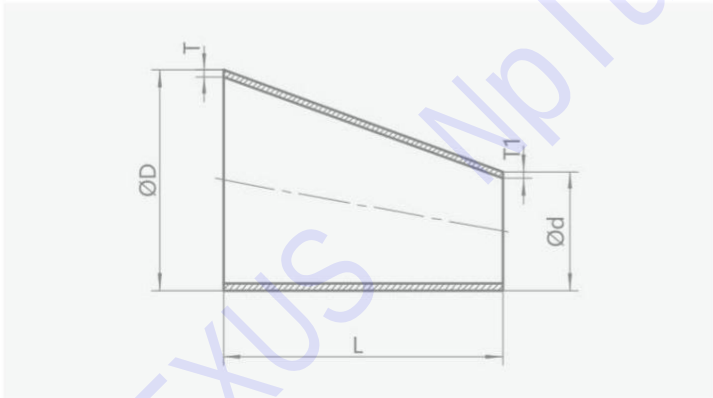


焊式偏心大小头 / Weld Eccentric Reducer					
Size	ØD	Ød	L	T	T1
1.5"x1.0"	38.1	25.4	29	1.65	1.65
2.0"x1.0"	50.8	25.4	48	1.65	1.65
2.0"x1.5"	50.8	38.1	39	1.65	1.65
2.5"x1.0"	63.5	25.4	73	1.65	1.65
2.5"x1.5"	63.5	38.1	47	1.65	1.65
2.5"x2.0"	63.5	50.8	44	1.65	1.65
3.0"x1.0"	76.2	25.4	95	1.65	1.65
3.0"x1.5"	76.2	38.1	70	1.65	1.65
3.0"x2.0"	76.2	50.8	46	1.65	1.65
3.0"x2.5"	76.2	63.5	36	1.65	1.65
4.0"x1.5"	101.6	38.1	115	2.1	1.65
4.0"x2.0"	101.6	50.8	91	2.1	1.65
4.0"x2.5"	101.6	63.5	69	2.1	1.65
4.0"x3.0"	101.6	76.2	78	2.1	1.65

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified



产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

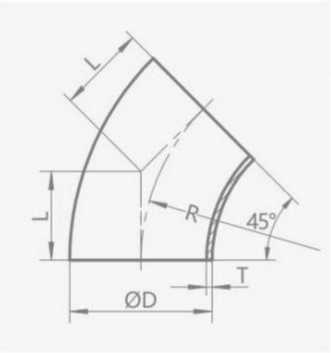

Size	D	L	R	T
1"	25.4	15.8	38.1	1.65
1½"	38.1	23.7	57.2	1.65
2"	50.8	31.6	76.2	1.65
2½"	63.5	39.5	95.3	1.65
3"	76.2	47.3	114.3	1.65
4"	101.6	63.1	152.4	2.1

PRODUCT IMAGE + TECHNICAL DATA

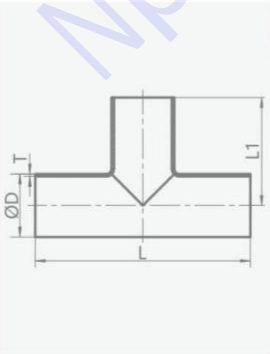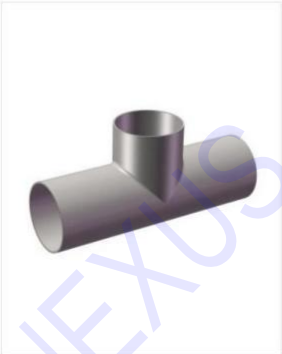

Size	D	L	L1	T
½"	12.7	95.2	47.6	1.65
¾"	19.1	101.6	50.8	1.65
1"	25.4	130	65	1.65
1½"	38.1	170	85	1.65
2"	50.8	220	110	1.65
2½"	63.5	270	135	1.65
3"	76.2	310	155	1.65
4"	101.6	390	195	2.1

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified

产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

45°焊式短弯头 / 45° Weld Short Elbow						
Size	ØD	L	R	T		
DN10	12	13	10.8	26	1.5	
DN15	18	19	14.5	35	1.5	
DN20	22	23	16.5	40	1.5	
DN25	28	29	20.7	50	1.5	
DN32	34	35	22.8	55	1.5	
DN40	40	41	24.9	60	1.5	
DN50	52	53	29	70	1.5	
DN65	70	70	33.1	80	2	
DN80	85	85	37.3	90	2	
DN100	104	104	41.4	100	2	
DN125	129	129	77.5	187	2	
DN150	154	154	93.2	225	2	
DN200	204	204	124.3	300	2	
DN250	254	-	155.3	325	2	

PRODUCT IMAGE + TECHNICAL DATA

45°焊式长弯头 / 45° Weld Long Elbow						
Size	ØD	L	R	T		
DN10	12	13	35.8	26	1.5	
DN15	18	19	39.5	35	1.5	
DN20	22	23	41.6	40	1.5	
DN25	28	29	60.7	50	1.5	
DN32	34	35	62.8	55	1.5	
DN40	40	41	64.9	60	1.5	
DN50	52	53	69	70	1.5	
DN65	70	70	73.1	80	2	
DN80	85	85	92.3	90	2	
DN100	104	104	96.4	100	2	
DN125	129	129	160.2	187	2	
DN150	154	154	193.2	225	2	
DN200	204	204	124.3	300	2	

PRODUCT IMAGE + TECHNICAL DATA

90°焊式短弯头 / 90° Weld Short Elbow						
Size	ØD	L	R	T		
DN10	12	13	26	26	1.5	
DN15	18	19	35	35	1.5	
DN20	22	23	40	40	1.5	
DN25	28	29	50	50	1.5	
DN32	34	35	55	55	1.5	
DN40	40	41	60	60	1.5	
DN50	52	53	70	70	1.5	
DN65	70	80	80	80	2	
DN80	85	90	90	90	2	
DN100	104	100	100	100	2	
DN125	129	187	187	187	2	
DN150	154	225	225	225	2	
DN200	204	300	300	300	2	

PRODUCT IMAGE + TECHNICAL DATA


90°焊式长弯头 / 90° Weld Long Elbow						
Size	ØD	L	R	T		
DN10	12	13	38	26	1.5	
DN15	18	19	47	35	1.5	
DN20	22	23	52	40	1.5	
DN25	28	29	70	50	1.5	
DN32	34	35	78	55	1.5	
DN40	40	41	85	60	1.5	
DN50	52	53	97	70	1.5	
DN65	70	70	110	80	2	
DN80	85	85	118	90	2	
DN100	104	104	140	100	2	
DN125	129	129	227	187	2	
DN150	154	154	265	225	2	

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified


产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

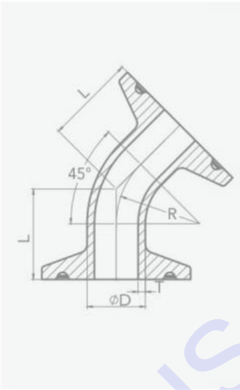

Size	ØD	L	R	T	
DN10	12	13	28.8	26	1.5
DN15	18	19	32.5	35	1.5
DN20	22	23	34.5	40	1.5
DN25	28	29	42.2	50	1.5
DN32	34	35	44.3	55	1.5
DN40	40	41	46.4	60	1.5
DN50	52	53	50.5	70	1.5
DN65	70	70	61.1	80	2
DN80	85	85	65.3	90	2
DN100	104	104	69.1	100	2
DN125	129	129	105.5	187	2
DN150	154	154	121.2	225	2

PRODUCT IMAGE + TECHNICAL DATA

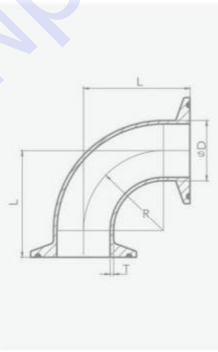


Size	ØD	L	R	T	
DN10	12	13	44	26	1.5
DN15	18	19	53	35	1.5
DN20	22	23	58	40	1.5
DN25	28	29	71.5	50	1.5
DN32	34	35	76.5	55	1.5
DN40	40	41	81.5	60	1.5
DN50	52	53	91.5	70	1.5
DN65	70	70	108	80	2
DN80	85	85	118	90	2
DN100	104	104	128	100	2
DN125	129	129	215	187	2
DN150	154	154	253	225	2

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified

产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

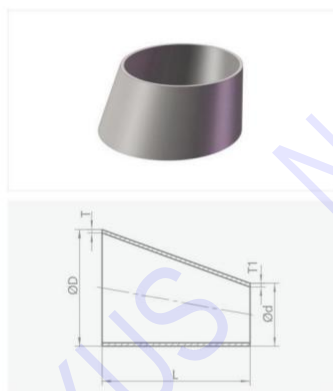

焊式偏心大小头 / Weld Eccentric Reducer							
Size	ØD		Ød		L	T	T1
DN32XDN25	34	35	28	29	16.5	1.5	1.5
DN40XDN25	40	41	28	29	33	1.5	1.5
DN40XDN32	40	41	34	35	16.5	1.5	1.5
DN50XDN25	52	53	28	29	66	1.5	1.5
DN50XDN32	52	53	34	35	49.5	1.5	1.5
DN50XDN40	52	53	40	41	33	1.5	1.5
DN65XDN40	70	70	40	41	77	2	1.5
DN65XDN50	70	70	52	53	44	2	1.5
DN80XDN40	85	85	40	41	78	2	1.5
DN80XDN50	85	85	52	53	85	2	1.5
DN80XDN65	85	85	70	70	41.2	2	2
DN100XDN50	104	104	52	53	137.5	2	1.5
DN100XDN65	104	104	70	70	93.5	2	2
DN100XDN80	104	104	85	85	52.5	2	2

PRODUCT IMAGE + TECHNICAL DATA



焊式同心大小头 / Weld Concentric Reducer							
Size	ØD		Ød		L	T	T1
DN20XDN15	22	23	18	19	7	1.5	1.5
DN25XDN15	28	29	18	19	18	1.5	1.5
DN25XDN20	28	29	22	23	11	1.5	1.5
DN32XDN20	34	35	22	23	22	1.5	1.5
DN32XDN25	34	35	28	29	11	1.5	1.5
DN40XDN20	40	41	22	23	33	1.5	1.5
DN40XDN25	40	41	28	29	22	1.5	1.5
DN40XDN32	40	41	34	35	22	1.5	1.5
DN50XDN20	52	53	22	23	27	1.5	1.5
DN50XDN25	52	53	28	29	44	1.5	1.5
DN50XDN32	52	53	34	35	33	1.5	1.5
DN50XDN40	52	53	40	41	22	1.5	1.5
DN65XDN25	70	70	28	29	73	2	1.5
DN65XDN32	70	70	34	35	62	2	1.5
DN65XDN40	70	70	40	41	51	2	1.5
DN65XDN50	70	70	52	53	29	2	1.5

PRODUCT IMAGE + TECHNICAL DATA

焊式变径三通 / Weld Long Reducing Tee							
Size	ØD		Ød		L	L1	T
DN15XDN10	18	19	12	13	70	35	1.5
DN20XDN15	22	23	18	19	80	40	1.5
DN25XDN15	28	29	18	19	100	50	1.5
DN25XDN20	28	29	22	23	100	50	1.5
DN32XDN25	34	35	28	29	110	55	1.5
DN40XDN25	40	41	28	29	120	60	1.5
DN40XDN32	40	41	34	35	120	60	1.5
DN50XDN25	52	53	28	29	140	70	1.5
DN50XDN32	52	53	34	35	140	70	1.5
DN50XDN40	52	53	40	41	140	70	1.5
DN65XDN25	70	70	28	29	160	80	2
DN65XDN32	70	70	34	35	160	80	2
DN65XDN40	70	70	40	41	160	80	2
DN65XDN50	70	70	52	53	160	80	2
DN80XDN25	85	85	28	29	180	90	2
DN80XDN40	85	85	40	41	180	90	2

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified

产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

焊式变径平口三通 / Weld Long Reducing Tee Without Straight End

Size	ØD	Ød	L	L1	T	T1		
DN15XDN10	18	19	12	13	70	11	1.5	1.5
DN20XDN15	22	23	18	19	80	13	1.5	1.5
DN25XDN15	28	29	18	19	100	16	1.5	1.5
DN25XDN20	28	29	22	23	100	16	1.5	1.5
DN32XDN25	34	35	28	29	110	19	1.5	1.5
DN40XDN25	40	41	28	29	120	22	1.5	1.5
DN40XDN32	40	41	34	35	120	22	1.5	1.5
DN50XDN25	52	53	28	29	140	28	1.5	1.5
DN50XDN32	52	53	34	35	140	28	1.5	1.5
DN50XDN40	52	53	40	41	140	28	1.5	1.5
DN65XDN25	70	70	28	29	160	37	2	1.5
DN65XDN40	70	70	40	41	160	37	2	1.5
DN65XDN50	70	70	52	53	160	37	2	1.5
DN80XDN25	85	85	28	29	180	44.5	2	1.5
DN80XDN40	85	85	40	41	180	44.5	2	1.5

PRODUCT IMAGE + TECHNICAL DATA

夹式等径三通 / Clamp Long Equal Tee

Size	ØD	L	T	
DN10	12	13	88	1.5
DN15	18	19	106	1.5
DN20	22	23	116	1.5
DN25	28	29	143	1.5
DN32	34	35	152	1.5
DN40	40	41	162	1.5
DN50	52	53	182	1.5
DN65	70	70	202	2
DN80	85	85	222	2
DN100	104	104	242	2
DN125	129	129	430	2
DN150	154	154	506	2
DN200	204	204	656	2
DN250	254	254	806	2
DN300	304	304	806	3

PRODUCT IMAGE + TECHNICAL DATA

焊式等径四通 / Weld Long 4 Way Equal Cross

Size	ØD	L	T	
DN10	12	13	52	1.5
DN15	18	19	70	1.5
DN20	22	23	80	1.5
DN25	28	29	100	1.5
DN32	34	35	110	1.5
DN40	40	41	120	1.5
DN50	52	53	140	1.5
DN65	70	70	160	2
DN80	85	85	180	2
DN100	104	104	200	2
DN125	129	129	375	2
DN150	154	154	450	2
DN200	204	204	600	2
DN250	254	254	750	2
DN300	304	304	750	3

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified

产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA




焊式等径平四通 / Weld Short 4 Way Equal Cross					
Size	OD	L	L1	T	
DN10	12	52	8	1.5	1.5
DN15	18	70	11	1.5	
DN20	22	80	13	1.5	
DN25	28	100	16	1.5	
DN32	34	110	19	1.5	
DN40	40	120	22	1.5	2
DN50	52	140	28	1.5	
DN65	70	160	37	2	
DN80	85	180	44.5	2	
DN100	104	200	54	2	
DN125	129	250	66.5	2	3
DN150	154	300	79	2	
DN200	204	400	104	2	
DN250	254	500	129	2	
DN300	304	600	155	3	

PRODUCT IMAGE + TECHNICAL DATA




180°焊式U型弯头 / 180° Weld U-Type Elbow					
Size	OD	L	H	T	
DN10	12	52	26		1.5
DN15	18	70	35		
DN20	22	80	40		
DN25	28	100	50		
DN32	34	110	55		
DN40	40	120	60		2
DN50	52	140	70		
DN65	70	160	80		
DN80	85	180	90		
DN100	104	200	100		
DN125	129	250	125		3
DN150	154	300	150		
DN200	204	400	200		
DN250	254	500	250		
DN300	304	600	300		

PRODUCT IMAGE + TECHNICAL DATA

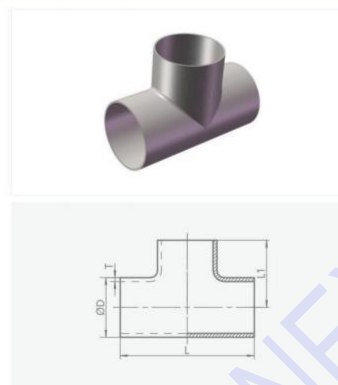

焊式等径三通 / Weld Short Equal Tee					
Size	OD	L	L1	T	
DN10	12	52	8	1.5	1.5
DN15	18	70	11	1.5	
DN20	22	80	13	1.5	
DN25	28	100	16	1.5	
DN32	34	110	19	1.5	
DN40	40	120	22	1.5	2
DN50	52	140	28	2	
DN65	70	160	37	2	
DN80	85	180	44.5	2	
DN100	104	200	54	2	
DN125	129	250	66.5	2	3
DN150	154	300	79	2	
DN200	204	400	104	2	
DN250	254	500	129	2	
DN300	304	600	155	3	

PRODUCT IMAGE + TECHNICAL DATA

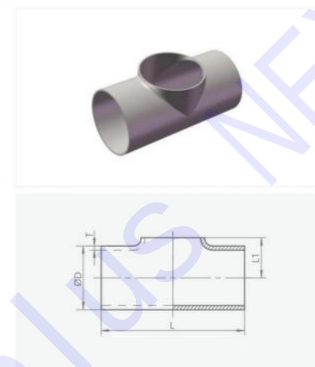


焊式等径平三通 / Weld Short Equal Tee					
Size	OD	L	L1	T	
DN10	12	52	8	1.5	1.5
DN15	18	70	11	1.5	
DN20	22	80	13	1.5	
DN25	28	100	16	1.5	
DN32	34	110	19	1.5	
DN40	40	120	22	1.5	2
DN50	52	140	28	2	
DN65	70	160	37	2	
DN80	85	180	44.5	2	
DN100	104	200	54	2	
DN125	129	250	66.5	2	3
DN150	154	300	79	2	
DN200	204	400	104	2	
DN250	254	500	129	2	
DN300	304	600	155	3	

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified


产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

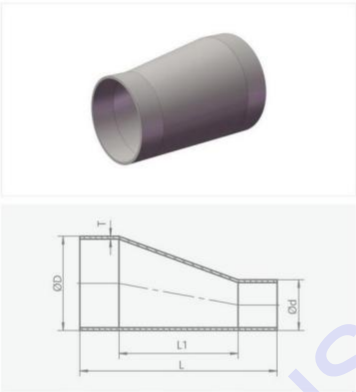

焊式偏心大小头(加直端) / Weld Eccentric Reducer (With Straight End)						
Size	OD	Od	L	T		
DN20XDN15	22	23	18	19	60	1.5
DN25XDN20	28	29	22	23	60	
DN32XDN20	34	35	22	23	80	
DN32XDN25	34	35	28	29	80	
DN40XDN20	40	41	22	23	102	
DN40XDN25	40	41	28	29	102	
DN40XDN32	40	41	34	35	102	
DN50XDN25	52	53	28	29	115	
DN50XDN32	52	53	34	35	115	
DN50XDN40	52	53	40	41	115	
DN65XDN25	70	71	28	29	125	2
DN65XDN32	70	71	34	35	125	
DN65XDN40	70	71	40	41	120	
DN65XDN50	70	71	52	53	120	
DN80XDN40	85	86	40	41	140	
DN80XDN50	85	86	52	53	125	
DN80XDN65	85	86	70	71	120	
DN100XDN50	104	105	52	53	160	
DN100XDN65	104	105	70	71	127	
DN100XDN80	104	105	85	86	120	
DN125XDN80	129	130	85	86	150	
DN125XDN100	129	130	104	105	150	
DN150XDN100	154	155	104	105	170	
DN150XDN125	154	155	129	130	170	

PRODUCT IMAGE + TECHNICAL DATA

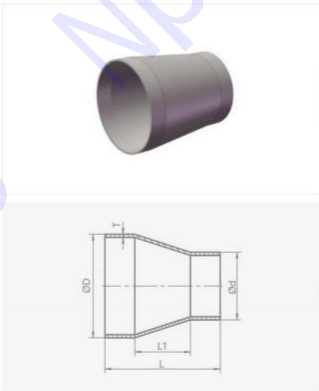


焊式同心大小头(加直端) / Weld Concentric Reducer (With Straight End)						
Size	OD	Od	L	T		
DN20XDN15	22	23	18	19	60	1.5
DN25XDN20	28	29	22	23	60	
DN32XDN20	34	35	22	23	80	
DN32XDN25	34	35	28	29	80	
DN40XDN20	40	41	22	23	102	
DN40XDN25	40	41	28	29	102	
DN40XDN32	40	41	34	35	102	
DN50XDN25	52	53	28	29	115	
DN50XDN32	52	53	34	35	115	
DN50XDN40	52	53	40	41	115	
DN65XDN25	70	71	28	29	125	2
DN65XDN32	70	71	34	35	125	
DN65XDN40	70	71	40	41	120	
DN65XDN50	70	71	52	53	120	
DN80XDN40	85	86	40	41	140	
DN80XDN50	85	86	52	53	125	
DN80XDN65	85	86	70	71	120	
DN100XDN50	104	105	52	53	160	
DN100XDN65	104	105	70	71	127	
DN100XDN80	104	105	85	86	120	
DN125XDN80	129	130	85	86	150	
DN125XDN100	129	130	104	105	150	
DN150XDN80	154	155	85	86	150	
DN150XDN100	154	155	104	105	170	
DN150XDN125	154	155	129	130	170	
DN200XDN100	204	205	104	105	180	
DN200XDN150	204	205	154	155	180	

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified

产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

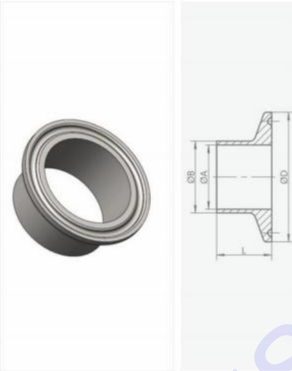

卡箍接头 / Ferrule										
Size	推荐系列		第1系列		第2系列		第3系列		ØD	L
DN10	9	12	10	12	10	13	11	14	34	18
DN15	15	18	16	18	16	19	17	20	34	18
DN20	19	22	20	22	20	23	21	24	34	18
DN25	25	28	26	28	26	29	27	30	50.5	21.5
DN32	31	34	32	34	32	35	33	36	50.5	21.5
DN40	37	40	38	40	38	41	38	42	50.5	21.5
DN50	49	52	50	52	50	53	50	54	64	21.5
DN65	66	70	66	70	66	70	66	70	91	28
DN80	81	85	81	85	81	85	81	85	106	28
DN100	100	104	100	104	100	104	100	104	119	28
DN125	125	129	125	129	125	129	125	129	144.5	28
DN125	125	129	125	129	125	129	125	129	155	28
DN150	150	154	150	154	150	154	150	154	183	28
DN200	200	204	200	204	200	204	200	204	233.5	28
DN250	250	254	250	254	250	254	250	254	270	28
DN300	300	304	300	304	300	304	300	304	319.3	28

PRODUCT IMAGE + TECHNICAL DATA




卡箍盲板 / End Cap		
Size	ØD	L
DN10	34	6.3
DN15	34	
DN20	34	
DN25	50.5	
DN32	50.5	
DN40	50.5	
DN50	64	7.9
DN65	91	
DN80	106	
DN100	119	
DN125	155	11.1
DN125	144.5	
DN150	183	
DN200	233.5	
DN250	270	

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified


产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

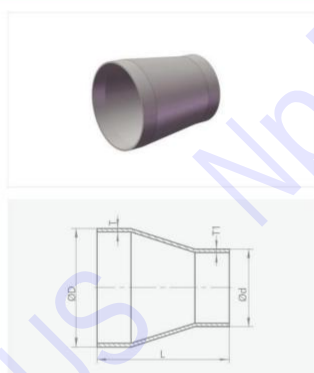

焊式同心大小头(加直端) / Weld Concentric Reducer (With Straight End)						
Size	L	OD	Ød	T	T1	
25×19	38	25.4	19.1	1.5	1.5	
32×25	50	31.8	25.4	1.5	1.5	
38×32	50	38.1	31.8	1.5	1.5	
38×25	50	38.1	25.4	1.5	1.5	
51×38	67	50.8	38.1	1.5	1.5	
51×32	67	50.8	31.8	1.5	1.5	
51×25	67	50.8	25.4	1.5	1.5	
63×51	67	63.5	50.8	2.0	1.5	
63×38	67	63.5	38.1	2.0	1.5	
63×25	67	63.5	25.4	2.0	1.5	
76×63	67	76.2	63.5	2.0	2.0	
76×51	67	76.2	50.8	2.0	1.5	
76×38	67	76.2	38.1	2.0	1.5	
89×76	67	89	76.2	2.0	2.0	
89×63	67	89	63.5	2.0	2.0	
89×51	67	89	50.8	2.0	1.5	
102×89	87	101.6	89	2.0	2.0	
102×76	87	101.6	76.2	2.0	2.0	
102×63	87	101.6	63.5	2.0	2.0	
102×51	87	101.6	50.8	2.0	1.5	

PRODUCT IMAGE + TECHNICAL DATA

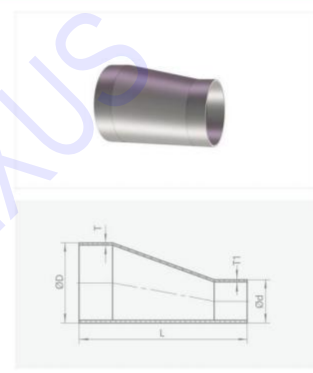


焊式偏心大小头(加直端) / Weld Eccentric Reducer (With Straight End)						
Size	L	OD	Ød	T	T1	
25×19	38	25.4	19.1	1.5	1.5	
32×25	50	31.8	25.4	1.5	1.5	
38×32	50	38.1	31.8	1.5	1.5	
38×25	50	38.1	25.4	1.5	1.5	
51×38	67	50.8	38.1	1.5	1.5	
51×32	67	50.8	31.8	1.5	1.5	
51×25	67	50.8	25.4	1.5	1.5	
63×51	67	63.5	50.8	2.0	1.5	
63×38	67	63.5	38.1	2.0	1.5	
63×25	67	63.5	25.4	2.0	1.5	
76×63	67	76.2	63.5	2.0	2.0	
76×51	67	76.2	50.8	2.0	1.5	
76×38	67	76.2	38.1	2.0	1.5	
89×76	67	89	76.2	2.0	2.0	
89×63	67	89	63.5	2.0	2.0	
89×51	67	89	50.8	2.0	1.5	
102×89	87	101.6	89	2.0	2.0	
102×76	87	101.6	76.2	2.0	2.0	
102×63	87	101.6	63.5	2.0	2.0	
102×51	87	101.6	50.8	2.0	1.5	

PRODUCT IMAGE + TECHNICAL DATA



夹式偏心大小头 / Clamp Eccentric Reducer							
Size	OD	Ød	Øk	Øk1	L	T	T1
25×19	25.4	19.1	50.5	34	80	1.5	1.5
32×25	31.8	25.4	50.5	50.5	92	1.5	1.5
38×32	38.1	31.8	50.5	50.5	92	1.5	1.5
38×25	38.1	25.4	50.5	50.5	92	1.5	1.5
51×38	50.8	38.1	64	50.5	109	1.5	1.5
51×32	50.8	31.8	64	50.5	109	1.5	1.5
51×25	50.8	25.4	64	50.5	109	1.5	1.5
63×51	63.5	50.8	77.5	64	109	2.0	1.5
63×38	63.5	38.1	77.5	50.5	109	2.0	1.5
63×25	63.5	25.4	77.5	50.5	109	2.0	1.5
76×63	76.2	63.5	91	77.5	109	2.0	2.0
76×51	76.2	50.8	91	64	109	2.0	1.5
76×38	76.2	38.1	91	50.5	109	2.0	1.5
89×76	89	76.2	106	91	109	2.0	2.0
89×63	89	63.5	106	77.5	109	2.0	2.0
89×51	89	50.8	106	64	109	2.0	1.5
102×89	101.6	89	119	106	129	2.0	2.0
102×76	101.6	76.2	119	91	129	2.0	2.0
102×63	101.6	63.5	119	77.5	129	2.0	2.0
102×51	101.6	50.8	119	64	129	2.0	1.5

PRODUCT IMAGE + TECHNICAL DATA

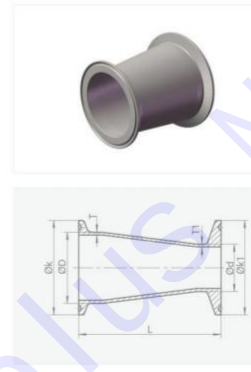


夹式同心大小头 / Clamp Concentric Reducer							
Size	OD	Ød	Øk	Øk1	L	T	T1
25×19	25.4	19.1	50.5	34	80	1.5	1.5
32×25	31.8	25.4	50.5	50.5	92	1.5	1.5
38×32	38.1	31.8	50.5	50.5	92	1.5	1.5
38×25	38.1	25.4	50.5	50.5	92	1.5	1.5
51×38	50.8	38.1	64	50.5	109	1.5	1.5
51×32	50.8	31.8	64	50.5	109	1.5	1.5
51×25	50.8	25.4	64	50.5	109	1.5	1.5
63×51	63.5	50.8	77.5	64	109	2.0	1.5
63×38	63.5	38.1	77.5	50.5	109	2.0	1.5
63×25	63.5	25.4	77.5	50.5	109	2.0	1.5
76×63	76.2	63.5	91	77.5	109	2.0	2.0
76×51	76.2	50.8	91	64	109	2.0	1.5
76×38	76.2	38.1	91	50.5	109	2.0	1.5
89×76	89	76.2	106	91	109	2.0	2.0
89×63	89	63.5	106	77.5	109	2.0	2.0
89×51	89	50.8	106	64	109	2.0	1.5
102×89	101.6	89	119	106	129	2.0	2.0
102×76	101.6	76.2	119	91	129	2.0	2.0
102×63	101.6	63.5	119	77.5	129	2.0	2.0
102×51	101.6	50.8	119	64	129	2.0	1.5

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified


产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA




焊式等径四通 / Weld 4 Way Equal Cross				
Size	ØD	L	T	
12.7	12.7	38	1.5	
19.1	19.1	57	1.5	
25	25.4	67	1.5	
32	31.8	76	1.5	
38	38.1	97	1.5	
45	45	108	1.5	
51	50.8	121	1.5	
57	57	134	2	
63	63.5	167	2	
76	76.2	177	2	
89	89	207	2	
102	101.6	254	2	

PRODUCT IMAGE + TECHNICAL DATA





焊式变径三通 / Weld Reducing Tee						
Size	L	L1	ØD	Ød	T	T1
32×25	76	38	31.8	25.4	1.5	1.5
38×25	97	48.5	38.1	25.4	1.5	1.5
38×32	97	48.5	38.1	31.8	1.5	1.5
51×32	121	60.5	50.8	31.8	1.5	1.5
51×38	121	60.5	50.8	38.1	1.5	1.5
63×51	167	83.5	63.5	50.8	2	1.5
76×51	177	88.5	76.2	50.8	2	1.5
76×63	177	88.5	76.2	63.5	2	2
102×51	254	127	101.6	50.8	2	1.5
102×63	254	127	101.6	63.5	2	2
102×76	254	127	101.6	76.2	2	2

PRODUCT IMAGE + TECHNICAL DATA



焊式等径平口三通 / Weld Equal Tee (Without Straight End)				
Size	ØD	L	L1	T
25	25.4	67	14.7	1.5
32	31.8	76	17.9	1.5
38	38.1	97	21	1.5
51	50.8	121	27.4	1.5
63	63.5	167	33.8	2
76	76.2	177	40.1	2
89	89	207	46.5	2
102	101.6	254	52.8	2

PRODUCT IMAGE + TECHNICAL DATA





90°夹式短弯头 / 90° Clamp Short Elbow					
Size	L	ØK	ØD	R	T
12.7	31.8	34	12.7	19.1	1.5
19.1	41.2	34	19.1	28.5	1.5
25	55	50.5	25.4	33.5	1.5
32	59.5	50.5	31.8	38	1.5
38	70	50.5	38.1	48.5	1.5
45	75.5	64	45	54	1.5
51	82	64	50.8	60.5	1.5
57	89.5	77.5	57	68	2
63	105	77.5	63.5	83.5	2
76	110	91	76.2	88.5	2
89	125	106	89	103.5	2
102	148.5	119	101.6	127	2
127	212	145	127	190.5	2
152	250	166.9	152	228.6	2

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified

产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA





90°焊式弯头 / 90° Weld Elbow				
Size	L	ØD	R	T
12.7	19.1	12.7	19.1	1.5
19.1	28.5	19.1	28.5	1.5
25	33.5	25.4	33.5	1.5
32	38	31.8	38	1.5
38	48.5	38.1	48.5	1.5
45	54	45	54	1.5
51	60.5	50.8	60.5	1.5
57	68	57	68	2
63	83.5	63.5	83.5	2
76	88.5	76.2	88.5	2
89	103.5	89	103.5	2
102	127	101.6	127	2
127	190.5	127	190.5	2
152	228.6	152.4	228.6	2

PRODUCT IMAGE + TECHNICAL DATA



45°焊式短弯头 / 45° Weld Short Elbow				
Size	L	ØD	R	T
12.7	7.9	12.7	19.1	1.5
19.1	11.8	19.1	28.5	1.5
25	13.9	25.4	33.5	1.5
32	15.7	31.8	38	1.5
38	20.1	38.1	48.5	1.5
45	23.8	45	54	1.5
51	25.1	50.8	60.5	1.5
57	28.1	57	68	2
63	34.6	63.5	83.5	2
76	36.7	76.2	88.5	2
89	42.9	89	103.5	2
102	52.6	101.6	127	2

PRODUCT IMAGE + TECHNICAL DATA

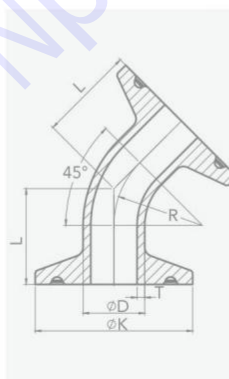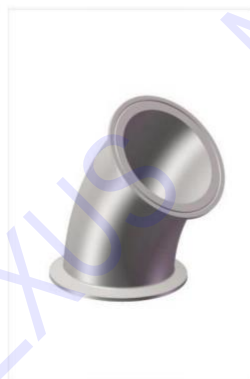


45°夹式弯头 / 45° Tri Clamp Elbow					
Size	L	ØD	ØK	R	T
12.7	20.6	12.7	34	19.1	1.5
19.1	24.5	19.1	34	28.5	1.5
25	26.6	25.4	50.5	33.5	1.5
32	28.4	31.8	50.5	38	1.5
38	32.8	38.1	50.5	48.5	1.5
45	36.5	45	64	54	1.5
51	37.8	50.8	64	60.5	1.5
63	47.3	63.5	77.5	83.5	2
76	49.4	76.2	91	88.5	2
89	55.6	89	106	103.5	2
102	68.4	101.6	119	127	2

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified



产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA




45°焊式长弯头 / 45° Weld Long Elbow					
Size	L	L1	ØD	R	T
25	30.2	16.3	25.4	33.5	1.5
38	41.3	21.2	38.1	48.5	1.5
51	58.7	33.6	50.8	60.5	1.5
63	76.2	41.6	63.5	83.5	2
76	93.7	57	76.2	88.5	2
102	122.2	69.6	101.6	127	2

PRODUCT IMAGE + TECHNICAL DATA




焊式等径三通 / Weld Equal Tee				
Size	ØD	L	L1	T
12.7	12.7	38.2	19.1	1.5
19.1	19.1	57	28.5	1.5
25	25.4	67	33.5	1.5
32	31.8	76	38	1.5
38	38.1	97	48.5	1.5
45	45	108	54	1.5
51	50.8	121	60.5	1.5
57	57	136	68	2
63	63.5	167	83.5	2
76	76.2	177	88.5	2
89	89	207	103.5	2
102	101.6	254	127	2

PRODUCT IMAGE + TECHNICAL DATA



夹式等径三通 / Clamp Equal Tee					
Size	ØD	ØK	L	L1	T
25	25.4	50.5	110	55	1.5
32	31.8	50.5	119	59.5	1.5
38	38.1	50.5	140	70	1.5
51	50.8	64	164	82	1.5
63	63.5	77.5	210	105	2
76	76.2	91	220	110	2
89	89	106	252	126	2
102	101.6	119	297	148.5	2

PRODUCT IMAGE + TECHNICAL DATA




14AMP卡箍接头 / ISO1127 14AMP Ferrule				
DN	ØA	ØB	ØD	L
8	10.3	13.5	34.0	28.6
12	14.0	17.2	34.0	
15	18.1	21.3	34.0	
20	23.7	26.9	50.5	
25	30.5	33.7	50.5	
32	39.2	42.4	50.5	
40	45.1	48.3	64.0	
50	56.3	60.3	77.5	
65	72.1	76.1	91.0	
80	84.9	88.9	106.0	
100	109.1	114.3	130.0	
125	133.7	139.7	155.0	
150	162.3	168.3	183.0	
200	211.1	219.1	233.5	

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified

产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

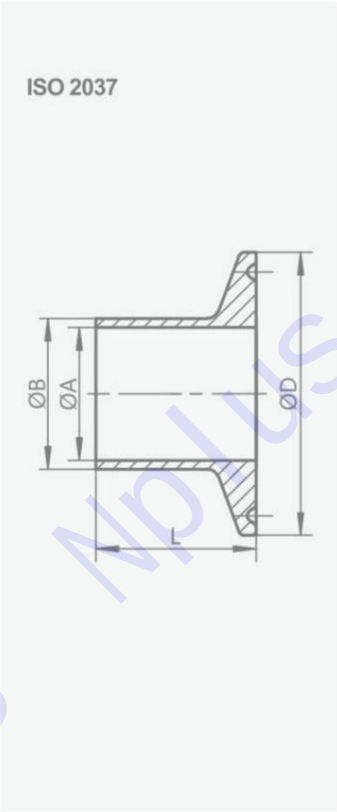



14AMP卡箍接头 / ISO2037 14AMP Ferrule				
DN	ØA	ØB	ØD	L
19	16	19	34.0	28.6
25	22.4	25.4	50.5	
32	29	32	50.5	
38	35.1	38.1	50.5	
45	41	45	64.0	
48	45	48	64.0	
51	47.8	50.8	64.0	
57	53	57	77.5	
63	59.5	63.5	77.5	
76	72.2	76.2	91.0	
80	81	85	106.0	
89	85	89	106.0	
102	97.6	101.6	130.0	
108	104	108	130.0	
133	127	133	155.0	
159	153	159	183.0	
219	211	219	233.5	

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified


产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA



90°焊式短弯头 / 90° Weld Short Elbow					
Size	ØD	L	R	T	
25	25.4	38.1	38.1	1.25	
32	31.8	47.7	47.7	1.25	
38	38.1	57.2	57.2	1.25	
51	50.8	76.2	76.2	1.25	
63.5	63.5	95.3	95.3	1.6	
76	76.2	114.3	114.3	1.6	
101.6	101.6	152.4	152.4	2	
104	104	152.4	152.4	2	

PRODUCT IMAGE + TECHNICAL DATA




90°焊式长弯头 / 90° Weld Long Elbow						
Size	ØD	R=1D		R=1.5D		T
		L	R	L	R	
25	25.4	55	25.4	52.4	38.1	1.25
32	31.8	64	31.8	64	47.7	1.25
38	38.1	70	38.1	74.6	57.2	1.25
51	50.8	82	50.5	103.2	76.2	1.25
63.5	63.5	105	63.5	131.8	95.3	1.6
76	76.2	110	76.2	160.3	114.3	1.6
101.6	101.6	150	101.6	211.1	152.4	2
104	104	150	101.6	211.1	152.4	2

PRODUCT IMAGE + TECHNICAL DATA



45°焊式长弯头 / 45° Weld Long Elbow					
Size	ØD	L	R	T	
25	25.4	30.2	38.1	1.25	
32	31.8	35.8	47.7	1.25	
38	38.1	41.3	57.2	1.25	
51	50.8	58.7	76.2	1.25	
63.5	63.5	76.2	95.3	1.6	
76	76.2	93.7	114.3	1.6	
101.6	101.6	122.2	152.4	2	
104	104	122.2	152.4	2	

PRODUCT IMAGE + TECHNICAL DATA




夹式等径三通 / Clamp Equal Tee				
Size	ØD	L	T	
25	25.4	135.4	1.25	
32	31.8	135.4	1.25	
38	38.1	165.4	1.25	
51	50.8	189.4	1.25	
63.5	63.5	235.4	1.6	
76	76.2	245.4	1.6	
104	101.6	331.6	2	

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified



产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA




焊式等径三通 / Weld Equal Tee				
Size	ØD	L	T	
25	25.4	110	1.25	
38	38.1	140	1.25	
51	50.8	164	1.25	
63.5	63.5	210	1.5	
76	76.2	220	1.6	
101.6	101.6	300	2	

PRODUCT IMAGE + TECHNICAL DATA




焊式等径平口三通 / Weld Equal Tee (Without Straight End)				
Size	ØD	L	L1	T
25	25.4	110	14.7	1.25
38	38.1	140	21	1.25
51	50.8	164	27.5	1.25
63.5	63.5	210	33.8	1.5
76	76.2	220	40.1	1.6
101.6	101.6	300	52.8	2

PRODUCT IMAGE + TECHNICAL DATA

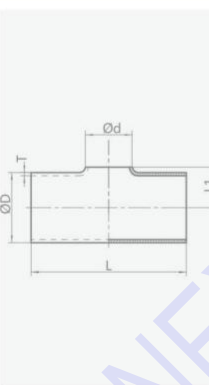

焊式变径平口三通 / Weld Equal Tee (Without Straight End)					
Size	ØD	Ød	L	L1	T
38X25	38.1	25.4	140	21	1.25
51X25	50.8	25.4	164	27.5	1.25
51X38	50.8	38.1	164	27.5	1.25
63.5X25	63.5	25.4	210	33.8	1.5
63.5X38	63.5	38.1	210	33.8	1.5
63.5X51	63.5	50.8	210	33.8	1.5
76X25	76.2	25.4	220	40.1	1.6
76X38	76.2	38.1	220	40.1	1.6
76X51	76.2	50.8	220	40.1	1.6
76X63.5	76.2	63.5	220	40.1	1.6
104X25	104	25.4	300	52.8	2
104X38	104	38.1	300	52.8	2
104X51	104	50.8	300	52.8	2
104X63.5	104	63.5	300	52.8	2
104X76	104	76.2	300	52.8	2

PRODUCT IMAGE + TECHNICAL DATA




焊式等径平口四通 / Weld 4 Way Equal Cross (Without Straight End)				
Size	ØD	L	L1	T
25	25.4	110	14.7	1.25
38	38.1	140	21	1.25
51	50.8	164	27.5	1.25
63.5	63.5	210	33.8	1.5
76	76.2	220	40.1	1.6
101.6	101.6	300	52.8	2

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified


产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

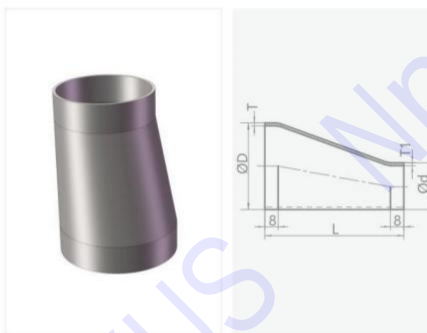


Size	ØD	Ød	L	T	T1
38X25	38.1	25.4	46	1.25	1.25
51X25	50.8	25.4	68	1.25	1.25
51X38	50.8	38.1	47	1.25	1.25
63.5X25	63.5	25.4	92	1.5	1.25
63.5X38	63.5	38.1	70	1.5	1.25
63.5X51	63.5	50.8	44	1.5	1.25
76X38	76.2	38.1	92	1.6	1.25
76X51	76.2	50.8	68	1.6	1.25
76X63.5	76.2	63.5	47	1.6	1.5
101.6X51	101.6	50.8	117	2	1.25
101.6X63.5	101.6	63.5	94	2	1.5
101.6X76	101.6	76.2	74	2	1.6

PRODUCT IMAGE + TECHNICAL DATA

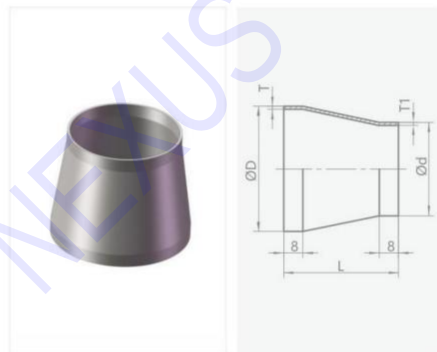


Size	ØD	Ød	L	T	T1
38X25	38.1	25.4	46	1.25	1.25
51X25	50.8	25.4	68	1.25	1.25
51X38	50.8	38.1	47	1.25	1.25
63.5X25	63.5	25.4	92	1.5	1.25
63.5X38	63.5	38.1	70	1.5	1.25
63.5X51	63.5	50.8	44	1.5	1.25
76X38	76.2	38.1	92	1.6	1.25
76X51	76.2	50.8	68	1.6	1.25
76X63.5	76.2	63.5	47	1.6	1.5
101.6X38	101.6	38.1	117	2	1.6
101.6X51	101.6	50.8	117	2	1.25
101.6X63.5	101.6	63.5	94	2	1.5
101.6X76	101.6	76.2	74	2	1.6

PRODUCT IMAGE + TECHNICAL DATA

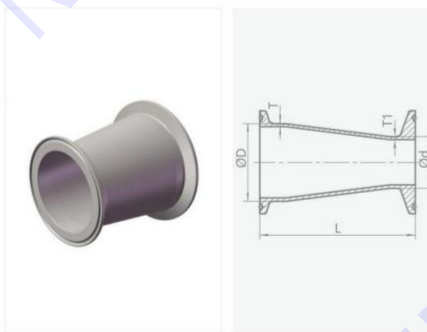

Size	ØD	Ød	L	T	T1
38X25	38.1	25.4	64.4	1.25	1.25
51X25	50.8	25.4	82.4	1.25	1.25
51X38	50.8	38.1	64.4	1.25	1.25
63.5X25	63.5	25.4	99.4	1.5	1.25
63.5X38	63.5	38.1	82.4	1.5	1.25
63.5X51	63.5	50.8	64.4	1.5	1.25
76X38	76.2	38.1	99.4	1.6	1.25
76X51	76.2	50.8	82.4	1.6	1.25
76X63.5	76.2	63.5	64.4	1.6	1.5
101.6X51	101.6	50.8	123.5	2	1.25
101.6X63.5	101.6	63.5	106.5	2	1.5
101.6X76	101.6	76.2	88.5	2	1.6

PRODUCT IMAGE + TECHNICAL DATA

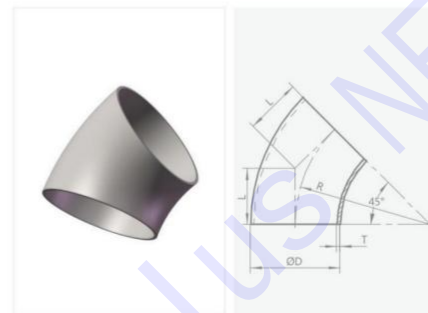


Size	ØD	L	R	T
25	25.4	15.8	38.1	1.25
32	31.8	19.8	47.7	
38	38.1	23.7	57.2	
51	50.8	31.6	76.2	
63.5	63.5	39.5	95.3	1.6
76	76.2	47.3	114.3	
101.6	101.6	63.1	152.4	2
104	104	63.1	152.4	

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified


产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

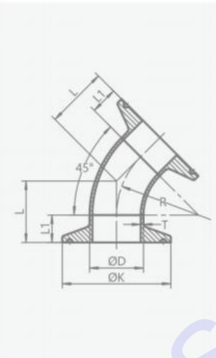

45°夹式弯头 / 45° Clamp Elbow						
Size	ØD	ØK	L	L1	R	T
25	25.4	50.5	28.5	12.7	38.1	1.25
32	31.8	50.5	32.5	12.7	47.7	
38	38.1	50.5	36.4	12.7	57.2	
51	50.8	64	44.3	12.7	76.2	
63.5	63.5	77.5	52.2	12.7	95.3	1.6
76	76.2	91	60	12.7	114.3	
101.6	101.6	119	78.9	15.8	152.4	2
104	104	119	78.9	15.8	152.4	

PRODUCT IMAGE + TECHNICAL DATA




90°夹式弯头 / 90° Clamp Elbow						
Size	ØD	ØK	L	L1	R	T
25	25.4	50.5	50.8	12.7	38.1	1.25
32	31.8	50.5	60.4	12.7	47.7	
38	38.1	50.5	69.9	12.7	57.2	
51	50.8	64	88.9	12.7	76.2	
63.5	63.5	77.5	108	12.7	95.3	1.6
76	76.2	91	127	12.7	114.3	
101.6	101.6	119	168.2	15.8	152.4	2
104	104	119	168.2	15.8	152.4	

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified

产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

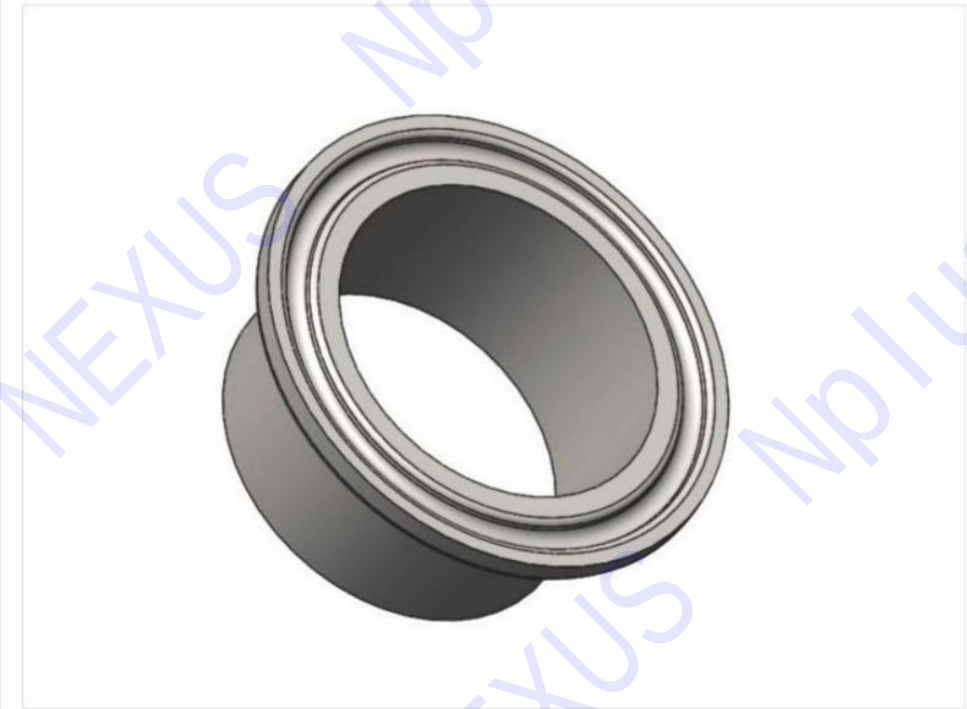

卡箍接头 / Ferrule							
Size	ØA		ØB	ØD	L		
	系列I	系列II			系列I	系列II	系列III
12.7	9.7	10.2	12.7	25.2	12.7	21.5	28.6
19	16.1	16.6	19.1	25.2	12.7	21.5	28.6
25	22.4	22.9	25.4	50.5	12.7	21.5	28.6
38	35.1	35.6	38.1	50.5	12.7	21.5	28.6
51	47.8	48.3	50.8	64	12.7	21.5	28.6
63	59.5	60.5	63.5	77.5	12.7	21.5	28.6
76	72.2	73	76.2	91	12.7	21.5	28.6
102	97.6	97.6	101.6	119	15.8	21.5	28.6

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified


产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA



卡箍式90°软管接头 / 90° Clamp Hose Barb Adapter							
Size		ØD		ØA		ØB	
3/8"	25.2	50.5	64	6.7	10	30	39.8
1/2"	25.2	50.5	64	9.7	12.7	31.8	44.1
5/8"	25.2	50.5	64	11	14	35	51.2
1"	25.2	50.5	64	13	16	40	59.3
1 1/4"	25.2	50.5	64	16	19.1	41.3	60.6
1 1/2"	50.5	64	19	22	52.7	72.1	
2"	50.5	64	21.4	25.4	50.8	58.8	70.2
2 1/2"	50.5	64	27.8	31.8	50.7	79.4	
3"	50.5	64	34.1	38.1	61.2	89.9	
3 1/2"	64	77.5	46.8	50.8	82	101.8	

PRODUCT IMAGE + TECHNICAL DATA

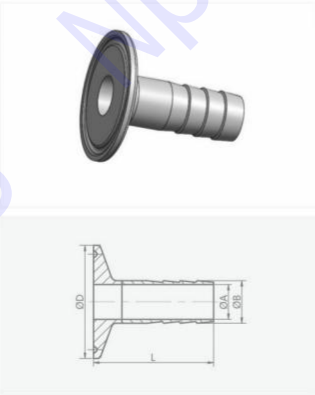


卡箍式软管接头 / Clamp Hose Barb Adapter					
Size		ØD		ØA	
1/8"	25.2	50.5	1.5	3	35.5
1/4"	25.2	50.5	3	6	35.5
5/16"	25.2	50.5	5	8	54
3/8"	25.2	50.5	6.7	10	54
1/2"	25.2	50.5	9.7	12.7	54
5/8"	25.2	50.5	13	16	54
3/4"	25.2	50.5	16	19.1	54
7/8"	50.5	64	19	22	54
1"	50.5	64	21.4	25.4	54
1 1/4"	50.5	64	27.8	31.8	54
1 1/2"	50.5	64	34.1	38.1	54
2"	64	77.5	46.8	50.8	101.6
2 1/2"	77.5	91	59.5	63.5	80
3"	91	101.6	72.2	76.2	80

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified


产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA




3A短型螺纹接头 / 3A Short Male					
Size	ØA	ØB	ØG	H	
1"	22.1	25.4	37.13*8TPI ACME	18.3	
1.5"	34.8	38.1	50.65*8TPI ACME	18.3	
2"	47.5	50.8	64.16*8TPI ACME	19.1	
2.5"	60.2	63.5	77.67*8TPI ACME	22.3	
3"	72.9	76.2	91.19*8TPI ACME	23.1	
4"	97.6	101.6	119.25*6TPI ACME	26.2	

PRODUCT IMAGE + TECHNICAL DATA





3A短型平接头 / 3A Short Liner					
Size	ØA	ØB	ØD	H	
1"	22.1	25.4	33.3	18.3	
1.5"	34.8	38.1	46.8	18.3	
2"	47.5	50.8	60.3	19.1	
2.5"	60.2	63.5	73.8	22.3	
3"	72.9	76.2	87.3	23.1	
4"	97.6	101.6	114.3	26.2	

PRODUCT IMAGE + TECHNICAL DATA



3A堵板 / 3A End Cap				
Size	ØA	ØB	H	
1"	29.5	33.3	11.9	
1.5"	42.6	46.8	14.3	
2"	55.7	60.3	15.9	
2.5"	68.8	73.8	16.7	
3"	81.9	87.3	18.3	
4"	108.1	114.3	20.6	

PRODUCT IMAGE + TECHNICAL DATA




3A圆螺母 / 3A Round Nut					
Size	ØA	G	ØD	H	
1"	30.3	38.02*8TPI ACME	46	23	
1.5"	43.4	51.54*8TPI ACME	61.1	24.6	
2"	56.5	65.05*8TPI ACME	76.2	27	
2.5"	69.6	78.56*8TPI ACME	91.3	29.6	
3"	82.7	92.08*8TPI ACME	106.4	32.5	
4"	108.9	120.14*6TPI ACME	137.6	38.1	

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified


产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA




3A长型螺纹接头 / 3A Long Male				
Size	ØA	ØB	G	H
1"	22.1	25.4	37.13*8TPI ACME	34.9
1.5"	34.8	38.1	50.65*8TPI ACME	38.1
2"	47.5	50.8	64.16*8TPI ACME	38.1
2.5"	60.2	63.5	77.67*8TPI ACME	44.5
3"	72.9	76.2	91.19*8TPI ACME	44.5
4"	97.6	101.6	119.25*6TPI ACME	44.5

PRODUCT IMAGE + TECHNICAL DATA





3A长型平接头 / 3A Long Liner				
Size	ØA	ØB	ØD	H
1"	22.1	25.4	33.3	34.9
1.5"	34.8	38.1	46.8	38.1
2"	47.5	50.8	60.3	38.1
2.5"	60.2	63.5	73.8	44.5
3"	72.9	76.2	87.3	44.5
4"	97.6	101.6	114.3	44.5

PRODUCT IMAGE + TECHNICAL DATA



3A六角螺母 / 3A Hexagon Nut				
Size	ØA	G	ØD	H
1"	30.3	38.02*8TPI ACME	53	23
1.5"	43.4	51.54*8TPI ACME	70.6	24.6
2"	56.5	65.05*8TPI ACME	88	27
2.5"	69.6	78.56*8TPI ACME	105.5	29.6
3"	82.7	92.08*8TPI ACME	122.9	32.5
4"	108.9	120.14*6TPI ACME	158.9	38.1

PRODUCT IMAGE + TECHNICAL DATA




3A六角盲螺母 / 3A Hexagon Blank Nut			
Size	G	ØD	H
1"	38.02*8TPI ACME	52	23
1.5"	51.54*8TPI ACME	70.6	24.6
2"	65.05*8TPI ACME	88	27
2.5"	78.56*8TPI ACME	105.5	29.6
3"	92.08*8TPI ACME	122.9	32.5
4"	120.14*6TPI ACME	158.9	38.1

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified


产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA




3A扩展式螺纹接头 / 3A Expand Male					
Size	ØA	ØB	G	H	
1"	25.5	29.5	37.13*8TPI ACME	20.6	
1.5"	38.2	42.6	50.65*8TPI ACME	28.6	
2"	50.9	55.7	64.16*8TPI ACME	34.9	
2.5"	63.6	68.8	77.67*8TPI ACME	38.1	
3"	76.3	81.9	91.19*8TPI ACME	41.3	
4"	101.7	108.1	119.25*6TPI ACME	41.3	

PRODUCT IMAGE + TECHNICAL DATA




3A扩展式平接头 / 3A Expand Liner				
Size	ØA	ØB	ØD	H
1"	25.5	29.5	33.3	19.1
1.5"	38.2	42.6	46.8	28.6
2"	50.9	55.7	60.3	33.3
2.5"	63.6	68.8	73.8	34.9
3"	76.3	81.9	87.3	36.5
4"	101.7	108.1	114.3	38.1

PRODUCT IMAGE + TECHNICAL DATA



DIN 11864-1 14A 无菌型平接头 / DIN11864-1 14A Aseptic Liner					
Size	ØA	ØB	ØD	H	
DN10	10	13	21.9	39	
DN15	16	19	27.9	39	
DN20	20	23	35.9	38	
DN25	26	29	42.9	40	
DN32	32	35	48.9	47	
DN40	38	41	54.9	47	
DN50	50	53	66.9	48	
DN65	66	70	84.9	61	
DN80	81	85	98.9	61	
DN100	100	104	118.9	66	

PRODUCT IMAGE + TECHNICAL DATA




DIN 11864-1 15A 无菌型螺纹接头 / DIN11864-1 15A Aseptic Male					
Size	ØA	ØB	G	H	
DN10	10	13	Ø27.5 RD28*1/8	41	
DN15	16	19	Ø33.5 RD34*1/8	41	
DN20	20	23	Ø43.5 RD44*1/6	43	
DN25	26	29	Ø51.5 RD52*1/6	43	
DN32	32	35	Ø57.5 RD58*1/6	48	
DN40	38	41	Ø64.5 RD65*1/6	48	
DN50	50	53	Ø77.5 RD78*1/6	48	
DN65	66	70	Ø94.5 RD95*1/6	60	
DN80	81	85	Ø109.5 RD110*1/4	64	
DN100	100	104	Ø129.5 RD130*1/4	64	

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified

产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

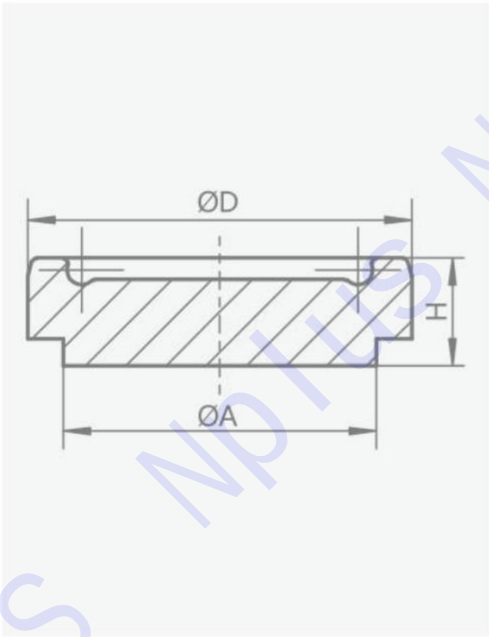


DIN 11864-1 16A无菌型盲平接头 / DIN 11864-1 16A septic Bland Liner			
Size	ØA	ØD	H
DN10	18	21.9	9
DN15	24	27.9	9
DN20	30	35.9	10
DN25	35	42.9	12
DN32	41	48.9	13
DN40	48	54.9	13
DN50	61	66.9	14
DN65	79	84.9	16
DN80	93	98.9	16
DN100	114	118.9	20

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified


产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA




DIN 英制-14A无菌平接头 / DIN-14A Aseptic Liner				
Size	ØA	ØB	ØD	H
1/2"	9.4	12.7	21.9	39
3/4"	15.8	19.1	27.9	39
1.0"	22.1	25.4	42.9	40
1.5"	34.8	38.1	54.9	46.5
2.0"	47.5	50.8	66.9	47.5
2.5"	60.2	63.5	84.9	63
3.0"	72.9	76.2	98.9	61
4.0"	97.4	101.6	118.9	65

PRODUCT IMAGE + TECHNICAL DATA




DIN 英制-15A无菌型螺纹接头 / DIN-15A Aseptic Liner				
Size	ØA	ØB	G	H
1/2"	9.4	12.7	Ø27.5 RD28*1/8	41
3/4"	15.8	19.1	Ø33.5 RD34*1/8	41
1.0"	22.1	25.4	Ø51.5 RD52*1/6	43
1.5"	34.8	38.1	Ø64.5 RD65*1/6	48.5
2.0"	47.5	50.8	Ø77.5 RD78*1/6	48.5
2.5"	60.2	63.5	Ø94.5 RD95*1/6	60
3.0"	72.9	76.2	Ø109.5 RD110*1/4	64
4.0"	97.4	101.6	Ø129.5 RD130*1/4	64

PRODUCT IMAGE + TECHNICAL DATA



DIN 英制-16A无菌型盲平接头 / DIN-16A Aseptic Blind Liner			
Size	ØA	ØD	H
1/2"	18	21.9	9
3/4"	24	27.9	9
1.0"	35	42.9	12
1.5"	48	54.9	13
2.0"	61	66.9	14
2.5"	79	84.9	16
3.0"	93	98.9	16
4.0"	114	118.9	20

PRODUCT IMAGE + TECHNICAL DATA




DIN 英制-16无菌型螺纹盲板 / DIN-16 Aseptic Male Thread Blind Cap			
Size	ØA	G	H
1/2"	20	Ø27.5 RD28*1/8	24
3/4"	26	Ø33.5 RD34*1/8	24
1.0"	43	Ø51.5 RD52*1/6	24
1.5"	55	Ø64.5 RD65*1/6	24
2.0"	69	Ø77.5 RD78*1/6	24
2.5"	84	Ø94.5 RD95*1/6	28
3.0"	96	Ø109.5 RD110*1/4	28
4.0"	116	Ø129.5 RD130*1/4	30

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified


产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

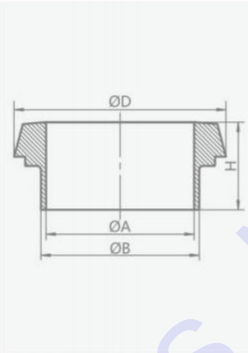

DIN 14DC长厚台阶型平接头 / DIN 14DC Weld Liner				
Size	ØA	ØB	ØD	H
DN10	10	15	22.5	17
DN15	16	21	28.5	17
DN20	20	25	36.5	18
DN25	26	31	44	22
DN32	32	37	50	25
DN40	38	43	56	26
DN50	50	55	68	28
DN65	66	72	86	32
DN80	81	87	100	37
DN100	100	106	121	44
DN125	125	132	150	34
DN150	150	157	176	37

PRODUCT IMAGE + TECHNICAL DATA




DIN 15DC长厚型螺纹接头 / DIN 15DC Weld Male				
Size	ØA	ØB	G	H
DN10	10	15	Ø27.5 RD28*1/8	21
DN15	16	21	Ø33.5 RD34*1/8	21
DN20	20	25	Ø43.5 RD44*1/6	24
DN25	26	31	Ø51.5 RD52*1/6	29
DN32	32	37	Ø57.5 RD58*1/6	32
DN40	38	43	Ø64.5 RD65*1/6	33
DN50	50	55	Ø77.5 RD78*1/6	35
DN65	66	72	Ø94.5 RD95*1/6	40
DN80	81	87	Ø109.5 RD110*1/4	45
DN100	100	106	Ø129.5 RD130*1/4	54
DN125	125	132	Ø159.3 RD160*1/4	46
DN150	150	157	Ø189.3 RD190*1/4	50

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified



产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA




DIN 14R扩展式平接头 / DIN 14R Expand Liner				
Size	ØA	ØB	ØD	H
DN10	10	18	22.5	17
DN15	16	24	28.5	17
DN20	20	30	36.5	18
DN25	26	35	44	22
DN32	32	41	50	25
DN40	38	48	56	26
DN50	50	61	68	28
DN65	66	79	86	32
DN80	81	93	100	37
DN100	100	114	121	44

PRODUCT IMAGE + TECHNICAL DATA




DIN 15R扩展式螺纹接头 / DIN 15R Expand Male				
Size	ØA	ØB	G	H
DN10	12.2	18	Ø27.5 RD28*1/8	21
DN15	18.2	24	Ø33.5 RD34*1/8	21
DN20	22.2	30	Ø43.5 RD44*1/6	24
DN25	28.2	35	Ø51.5 RD52*1/6	29
DN32	34.2	41	Ø57.5 RD58*1/6	32
DN40	40.2	48	Ø64.5 RD65*1/6	33
DN50	52.2	61	Ø77.5 RD78*1/6	35
DN65	70.3	79	Ø94.5 RD95*1/6	40
DN80	85.3	93	Ø109.5 RD110*1/4	45
DN100	104.3	114	Ø129.5 RD130*1/4	54
DN125	129.3	137	Ø159.3 RD160*1/4	46
DN150	154.3	163	Ø189.3 RD190*1/4	50

PRODUCT IMAGE + TECHNICAL DATA



DIN 15T加厚型螺纹接头 / DIN 15T Weld Male				
Size	ØA	ØB	G	H
DN10	10	18	Ø27.5 RD28*1/8	21
DN15	16	24	Ø33.5 RD34*1/8	21
DN20	20	30	Ø43.5 RD44*1/6	24
DN25	26	35	Ø51.5 RD52*1/6	29
DN32	32	41	Ø57.5 RD58*1/6	32
DN40	38	48	Ø64.5 RD65*1/6	33
DN50	50	61	Ø77.5 RD78*1/6	35
DN65	66	79	Ø94.5 RD95*1/6	40
DN80	81	93	Ø109.5 RD110*1/4	45
DN100	100	114	Ø129.5 RD130*1/4	54
DN125	125	137	Ø159.3 RD160*1/4	46
DN150	150	163	Ø189.3 RD190*1/4	50

PRODUCT IMAGE + TECHNICAL DATA




DIN 14T加厚型平接头 / DIN 14T Weld Liner				
Size	ØA	ØB	ØD	H
DN10	10	18	22.5	17
DN15	16	24	28.5	17
DN20	20	30	36.5	18
DN25	26	35	44	22
DN32	32	41	50	25
DN40	38	48	56	26
DN50	50	61	68	28
DN65	66	79	86	32
DN80	81	93	100	37
DN100	100	114	121	44
DN125	125	137	150	34
DN150	150	163	176	37

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified


产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

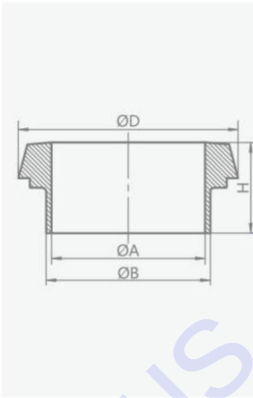

Size	ØA		ØB		ØD	H
DN10	9	10	12	13	22.5	17
DN15	15	16	18	19	28.5	17
DN20	19	20	22	23	36.5	18
DN25	25	26	28	29	44	22
DN32	31	32	34	35	50	25
DN40	37	38	40	41	56	26
DN50	49	50	52	53	68	28
DN65	66		70		86	32
DN80	81		85		100	37
DN100	100		104		121	44
DN125	125		129		150	34
DN150	150		154		176	37

PRODUCT IMAGE + TECHNICAL DATA

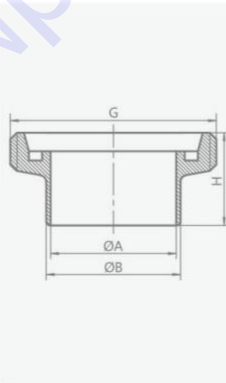


Size	ØA		ØB		G	H
DN10	9	10	12	13	Ø27.5 RD28*1/8	21
DN15	15	16	18	19	Ø33.5 RD34*1/8	21
DN20	19	20	22	23	Ø43.5 RD44*1/6	24
DN25	25	26	28	29	Ø51.5 RD52*1/6	29
DN32	31	32	34	35	Ø57.5 RD58*1/6	32
DN40	37	38	40	41	Ø64.5 RD65*1/6	33
DN50	49	50	52	53	Ø77.5 RD78*1/6	35
DN65	66	70		Ø94.5 RD95*1/6		40
DN80	81		85		Ø109.5 RD110*1/4	45
DN100	100		104		Ø129.5 RD130*1/4	54
DN125	125		129		Ø159.3 RD160*1/4	46
DN150	150		154		Ø189.3 RD190*1/4	50

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified



产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

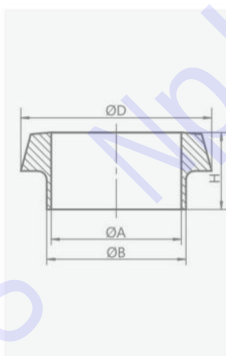

DIN 14S短型平接头 / DIN 14S Short Liner						
Size	ØA	ØB	ØD	H		
DN10	9	10	12	13	22.5	13
DN15	15	16	18	19	28.5	13
DN20	19	20	22	23	36.5	13
DN25	25	26	28	29	44	15
DN32	31	32	34	35	50	15
DN40	37	38	40	41	56	15
DN50	49	50	52	53	68	16
DN65	66	66	70	70	86	17
DN80	81	81	85	85	100	17
DN100	100	100	104	104	121	20
DN125	125	125	129	129	150	23.5
DN150	150	150	154	154	176	27

PRODUCT IMAGE + TECHNICAL DATA

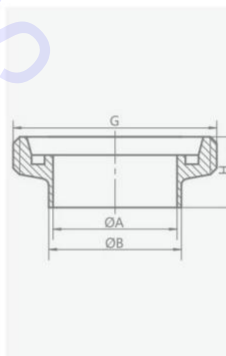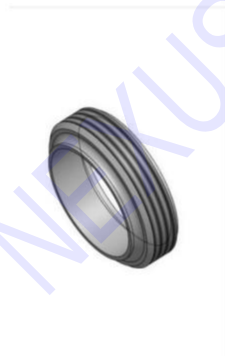


DIN 15S短型螺纹接头 / DIN 15S Short Male				
Size	ØA	ØB	G	H
DN10	9	12	Ø27.5 RD28*1/8	17
DN15	15	18	Ø33.5 RD34*1/8	17
DN20	19	22	Ø43.5 RD44*1/6	19
DN25	25	28	Ø51.5 RD52*1/6	22
DN32	31	34	Ø57.5 RD58*1/6	22
DN40	37	40	Ø64.5 RD65*1/6	22
DN50	49	52	Ø77.5 RD78*1/6	23
DN65	66	70	Ø94.5 RD95*1/6	25
DN80	81	85	Ø109.5 RD110*1/4	25
DN100	100	104	Ø129.5 RD130*1/4	30
DN125	125	129	Ø159.3 RD160*1/4	35.5
DN150	150	154	Ø189.3 RD190*1/4	40

PRODUCT IMAGE + TECHNICAL DATA



DIN 14B盲平接头 / DIN 14B End Cap			
Size	ØA	ØD	H
DN10	18	22.5	9
DN15	24	28.5	9
DN20	30	36.5	11
DN25	35	44	13
DN32	41	50	13
DN40	48	56	13
DN50	61	68	14
DN65	79	86	16
DN80	93	100	16
DN100	114	121	20
DN125	137	150	22
DN150	163	176	24

PRODUCT IMAGE + TECHNICAL DATA





DIN 15I英制螺纹接头 / DIN 15I Male				
Size	ØA	ØB	G	H
1.0"	22.1	25.4	Ø51.5 RD52*1/6	29
1.25"	28.5	31.8	Ø57.5 RD58*1/6	32
1.5"	34.8	38.1	Ø64.5 RD65*1/6	33
2.0"	47.5	50.8	Ø77.5 RD78*1/6	35
2.5"	60.2	63.5	Ø94.5 RD95*1/6	40
3.0"	72.9	76.2	Ø109.5 RD110*1/4	45
4.0"	97.6	101.6	Ø129.5 RD130*1/4	54

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified

产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

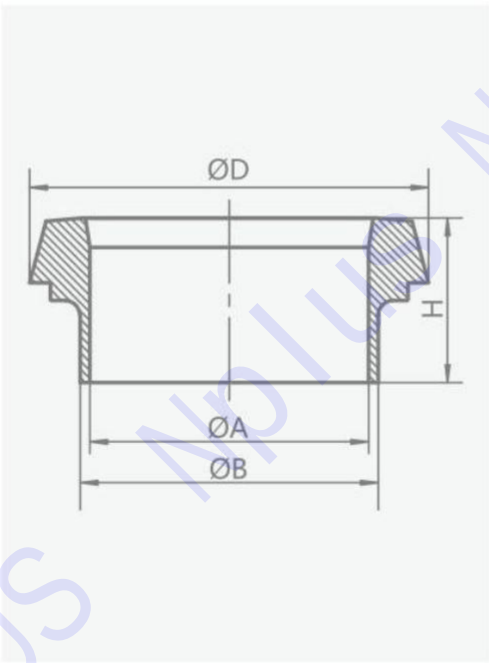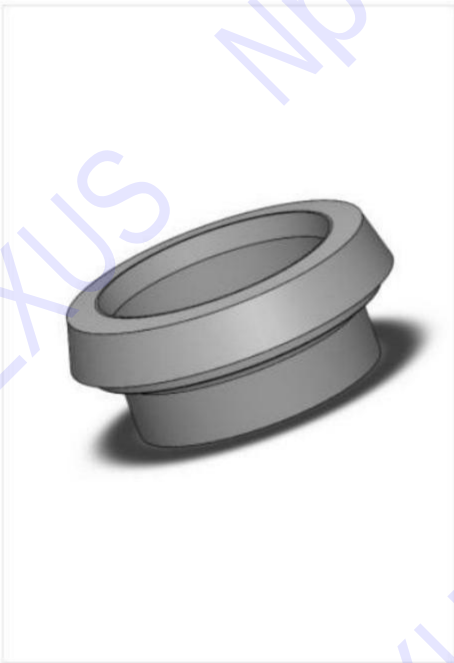


DIN 14I 英制平接头 / DIN 14I Liner				
Size	ØA	ØB	ØD	H
1.0"	22.1	25.4	44	22
1.25"	28.5	31.8	50	25
1.5"	34.8	38.1	56	26
2.0"	47.5	50.8	68	28
2.5"	60.2	63.5	86	32
3.0"	72.9	76.2	100	37
4.0"	97.6	101.6	121	44

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified


产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA




DIN 13RBN圆形盲盖螺母 / DIN Round Blind Nut With Chain			
Size	ØD	G	H
DN10	38	RD28*1/8	18
DN15	44	RD34*1/8	18
DN20	54	RD44*1/6	21
DN25	63	RD52*1/6	21
DN32	70	RD58*1/6	21
DN40	78	RD65*1/6	21
DN50	92	RD78*1/6	22
DN65	112	RD95*1/6	25
DN80	127	RD110*1/4	30
DN100	148	RD130*1/4	31
DN125	178	RD160*1/4	35
DN150	210	RD190*1/4	40

PRODUCT IMAGE + TECHNICAL DATA



DIN 13R圆螺母 / DIN 13R Round nut				
Size	ØA	ØD	G	H
DN10	19	38	RD28*1/8	18
DN15	25	44	RD34*1/8	18
DN20	31	54	RD44*1/6	21
DN25	36	63	RD52*1/6	21
DN32	42	70	RD58*1/6	21
DN40	49	78	RD65*1/6	21
DN50	62	92	RD78*1/6	22
DN65	80	112	RD95*1/6	25
DN80	94	127	RD110*1/4	30
DN100	115	148	RD130*1/4	31
DN125	138	178	RD160*1/4	35
DN150	164	210	RD190*1/4	40

PRODUCT IMAGE + TECHNICAL DATA



DIN 13SR由任垫圈 / DIN 13SR Seal Ring			
Size	ØA	ØB	H
DN10	12	20	4.5
DN15	18	26	
DN20	23	33	
DN25	30	40	
DN32	36	46	5
DN40	42	52	
DN50	54	64	
DN65	71	81	
DN80	85	95	7
DN100	104	114	
DN125	130	142	
DN150	155	167	


PRODUCT DATA / 产品图与参数

Clean connection, clearly specified

产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

法兰式云头/法兰式云头堵板 DIN11864-2 NF A型 / Nut Flange/Blind Nut Flange							
Size	Ød1	Ød	Ød10	Ød12	Ød13	b1	c
1/2"	9.4	9.45	54	12.7	4-Ø9	11.5	41.5
3/4"	15.75	15.8	59	19.05	4-Ø9	11.5	41.5
1"	22.1	22.15	66	25.4	4-Ø9	11.5	41.5
1.5"	34.8	34.85	79	38.1	4-Ø9	11.5	46.5
2"	47.5	47.55	92	50.8	4-Ø9	11.5	46.5
2.5"	60.2	60.25	107	63.5	8-Ø9	11.5	55.5
3"	72.9	72.95	125	76.2	8-Ø11	13.5	57.5
4"	97.38	97.43	157	101.6	8-Ø11	15.5	59.5




PRODUCT IMAGE + TECHNICAL DATA

法兰式云头/法兰式云头堵板-DIN制 DIN11864-2 NF A型 / Nut Flange/Blind Nut Flange							
Size	Ød1	Ød	Ød10	Ød12	Ød13	b1	c
DN10	10	10.05	54	13	4-Ø9	11.5	41.5
DN15	16	16.05	59	19	4-Ø9	11.5	41.5
DN20	20	20.05	64	23	4-Ø9	11.5	41.5
DN25	26	26.05	70	29	4-Ø9	11.5	41.5
DN32	32	32.05	76	35	4-Ø9	11.5	46.5
DN40	38	38.05	82	41	4-Ø9	11.5	46.5
DN50	50	50.05	94	53	4-Ø9	11.5	46.5
DN65	66	66.05	113	70	8-Ø9	11.5	55.5
DN80	81	81.05	133	85	8-Ø11	13.5	59.5
DN100	100	100.05	159	104	8-Ø11	15.5	59.5
DN125	125	125.05	183	129	8-Ø11	15.5	61.5
DN150	150	150.05	213	154	8-Ø14	17.5	61.5

PRODUCT IMAGE + TECHNICAL DATA

法兰式平接头/法兰式平接头堵板 DIN11864-2 BF A型 / Liner Flange/Blind Liner Flange							
Size	Ød1	Ød12	Ød	Ød10	Ød13	b2	h
1/2"	9.4	12.7	9.45	54	4-Ø9	10	40
3/4"	15.75	19.05	15.8	59	4-Ø9	10	40
1"	22.1	25.4	22.15	66	4-Ø9	10	40
1.5"	34.8	38.1	34.85	79	4-Ø9	10	45
2"	47.5	50.8	47.55	92	4-Ø9	10	45
2.5"	60.2	63.5	60.25	107	8-Ø9	10	54
3"	72.9	76.2	72.95	125	8-Ø11	12	56
4"	97.38	101.6	97.43	157	8-Ø11	14	58



PRODUCT IMAGE + TECHNICAL DATA


法兰式平接头/法兰式平接头堵板-DIN制 DIN11864-2 BF A型 / Liner Flange/Blind Liner Flange							
Size	Ød1	Ød12	Ød	Ød10	Ød13	b2	h
DN10	10	13	10.05	54	4-Ø9	10	40
DN15	16	19	16.05	59	4-Ø9	10	40
DN20	20	23	20.05	64	4-Ø9	10	40
DN25	26	29	26.05	70	4-Ø9	10	40
DN32	32	35	32.05	76	4-Ø9	10	45
DN40	38	41	38.05	82	4-Ø9	10	45
DN50	50	53	50.05	94	4-Ø9	10	45
DN65	66	70	66.05	113	8-Ø9	10	54
DN80	81	85	81.05	133	8-Ø11	12	58
DN100	100	104	100.05	159	8-Ø11	14	58
DN125	125	129	125.05	183	8-Ø11	14	60
DN150	150	154	150.05	213	8-Ø14	16	60

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified


产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA





DS 14L长型台阶式平接头 / DS 14L Long stepped Liner			
Size	ØD	ØD1	H
1/2"	12.7	22	12
3/4"	19.1	28	12
1"	25.4	39.5	16
1.25"	31.8	47.5	16
1.5"	38.1	53.5	18
2"	50.8	67.5	20
2.5"	63.5	83.5	22
3"	76.2	95.5	24
4"	101.6	123.5	24
5"	127	150	25
6"	152.4	174	25

PRODUCT IMAGE + TECHNICAL DATA




DS 15L长型螺纹接头 / DS 15L Long Male			
Size	ØD	G	H
1/2"	12.7	RD28*1/8	17
3/4"	19.1	RD34*1/8	17
1"	25.4	RD44*1/6	20
1.25"	31.8	RD52*1/6	20
1.5"	38.1	RD58*1/6	22
2"	50.8	RD72*1/6	24
2.5"	63.5	RD88*1/6	26
3"	76.2	RD100*1/6	28
4"	101.6	RD130*1/4	34
5"	127	RD160*1/6	35
6"	152.4	RD180*1/6	35

PRODUCT IMAGE + TECHNICAL DATA



DS 14S短型台阶式平接头 / DS 14S Short Stepped Liner			
Size	ØD	ØD1	H
1/2"	12.7	22	11
3/4"	19.1	28	11
1"	25.4	39.5	11
1.25"	31.8	47.5	11
1.5"	38.1	53.5	11
2"	50.8	67.5	11
2.5"	63.5	83.5	12
3"	76.2	95.5	12
4"	101.6	123.5	12
5"	127	150	18
6"	152.4	174	18

PRODUCT IMAGE + TECHNICAL DATA




DS 15S短型螺纹接头 / DS 15S Short Male			
Size	ØD	G	H
1/2"	12.7	RD28*1/8	15
3/4"	19.1	RD34*1/8	15
1"	25.4	RD44*1/6	18.5
1.25"	31.8	RD52*1/6	18.5
1.5"	38.1	RD58*1/6	20
2"	50.8	RD72*1/6	20
2.5"	63.5	RD88*1/6	24
3"	76.2	RD100*1/6	24
4"	101.6	RD130*1/4	24
5"	127	RD160*1/6	-
6"	152.4	RD180*1/6	-

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified



产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

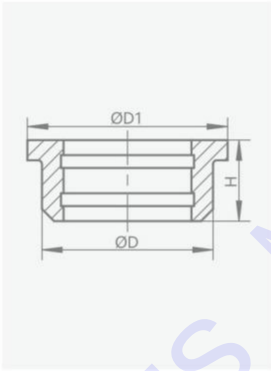

DS 14R扩展式平接头 / DS 14R Expand Liner			
Size	ØD1	ØD	H
1"	39.5	33.8	16
1.25"	47.8	41.5	16
1.5"	53.5	47.5	18
2"	67.5	61.5	20
2.5"	83.5	75.5	22
3"	95.5	87.5	24
4"	123.5	115	29

PRODUCT IMAGE + TECHNICAL DATA




DS 15R扩展式螺纹接头 / DS 15R Expand Male			
Size	ØD	G	H
1"	34	RD44*1/6	20
1.25"	41.5	RD52*1/6	20
1.5"	47.5	RD58*1/6	22
2"	61.5	RD72*1/6	24
2.5"	75.5	RD88*1/6	26
3"	87.5	RD100*1/6	28
4"	115	RD130*1/4	34

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified


产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA




DS 13SR 密封垫圈 / DS 13SR Seal Ring		
Size	ØD	H
1/2"	19.8	5
3/4"	25.8	5
1"	31.8	5.5
1.25"	40.8	5.5
1.5"	46.8	5.5
2"	58.8	5.5
2.5"	74.3	5.5
3"	87.8	5.5
4"	115.8	5.5

PRODUCT IMAGE + TECHNICAL DATA




DS 13RG 盲螺母垫圈 / DS 13RG Bland Nut Gasket	
Size	ØD
1/2"	24.5
3/4"	30.5
1"	39.5
1.25"	47.5
1.5"	53.5
2"	67.5
2.5"	83.5
3"	95.5
4"	123.5

PRODUCT IMAGE + TECHNICAL DATA



DS 13R 圆形螺母 / DS 13R Round Nut				
Size	ØD	ØA	G	H
1/2"	38	19	RD28*1/8	18
3/4"	44	25	RD34*1/8	18
1"	57	35	RD44*1/6	20
1.25"	65	42	RD52*1/6	20
1.5"	71	48.5	RD58*1/6	20
2"	86	62.5	RD72*1/6	22
2.5"	103	76.5	RD88*1/6	24
3"	115	88.5	RD100*1/6	25
4"	148	117	RD130*1/4	32
5"	178	138	RD160*1/6	34
6"	197	164	RD180*1/6	32

PRODUCT IMAGE + TECHNICAL DATA




DS 13RBn 圆形盲盖螺母(不带柄) / DS 13RBn Round Blank Nut			
Size	ØD	G	H
1/2"	38	RD28*1/8	18
3/4"	44	RD34*1/8	18
1"	57	RD44*1/6	20
1.25"	65	RD52*1/6	20
1.5"	71	RD58*1/6	20
2"	86	RD72*1/6	22
2.5"	103	RD88*1/6	24
3"	115	RD100*1/6	25
4"	148	RD130*1/4	32
5"	178	RD160*1/6	34
6"	197	RD180*1/6	32

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified

产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

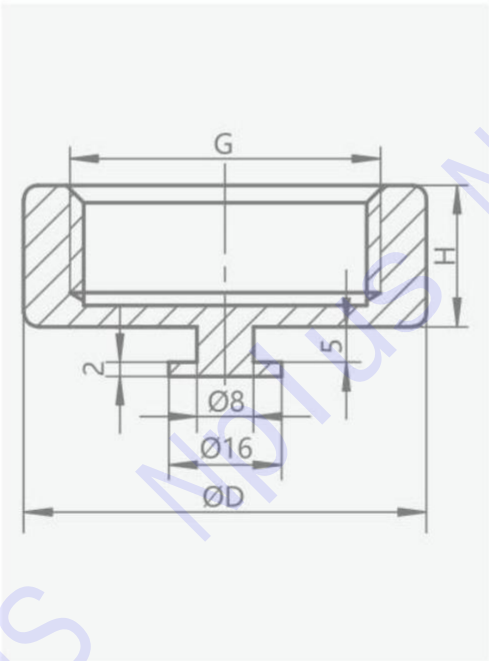


DS 13RBN盲盖螺母 / DS 13RBN Blank Nut			
Size	ØD	G	H
1/2"	38	RD28*1/8	18
3/4"	44	RD34*1/8	18
1"	57	RD44*1/6	20
1.25"	65	RD52*1/6	20
1.5"	71	RD58*1/6	20
2"	86	RD72*1/6	22
2.5"	103	RD88*1/6	24
3"	115	RD100*1/6	25
4"	148	RD130*1/4	32
5"	178	RD160*1/6	34
6"	197	RD180*1/6	32

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified



产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA




IDF 14平接头 / IDF 14 Liner				
Size	ØA	ØB	ØD	H
1"	22.4	25.4	33.8	21.5
1.5"	35.1	38.1	47	21.5
2"	47.8	50.8	60.5	21.5
2.5"	59.5	63.5	74	21.5
3"	72.2	76.2	87.5	21.5
4*R	97.6	101.6	114.1	21.5
4"H	97.6	101.6	120.5	30

PRODUCT IMAGE + TECHNICAL DATA




IDF 15螺纹接头 / IDF 15 Male			
Size	ØD	G	H
1"	25.4	37.13*8T ACME	21.5
1.5"	38.1	50.65*8T ACME	21.5
2"	50.8	64.16*8T ACME	21.5
2.5"	63.5	77.67*8T ACME	21.5
3"	76.2	91.19*8T ACME	21.5
4*R	101.6	118.2*8T ACME	21.5
4"H	101.6	125.9*6T ACME	30

PRODUCT IMAGE + TECHNICAL DATA



IDF 14B堵板 / IDF 14B End Cap			
Size	ØA	ØB	H
1"	29.2	33.8	10.5
1.5"	42.7	47	10.5
2"	56.2	60.5	10.5
2.5"	69.9	74	10.5
3"	82.6	87.5	10.5
4*R	111.1	114.1	12.6
4"H	111.1	120.6	12.6

PRODUCT IMAGE + TECHNICAL DATA




IDF 14R扩展式平接头 / IDF 14R Expand Liner				
Size	ØA	ØB	ØD	H
1"	25.5	29.2	33.8	20
1.5"	38.2	42.7	47	20
2"	50.9	56.2	60.5	25
2.5"	63.6	69.9	74	30
3"	76.3	82.6	87.5	30
4*R	101.7	108.4	114.1	30
4"H	101.7	111.1	120.5	30

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified


产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

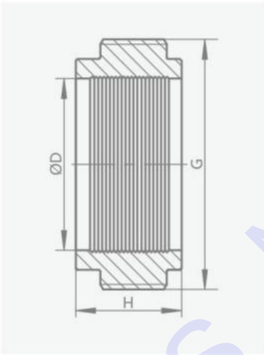

IDF 15R扩展式螺纹接头 / IDF 15R Expand Male			
Size	ØD	G	H
1"	25.5	37.13*8T ACME	19.5
1.5"	38.2	50.65*8T ACME	19.5
2"	50.9	64.16*8T ACME	19.5
2.5"	63.6	77.67*8T ACME	25
3"	76.3	91.19*8T ACME	30
4*R	101.7	118.2*8T ACME	35
4*H	101.7	125.9*6T ACME	35

PRODUCT IMAGE + TECHNICAL DATA




IDF 13SR由任垫圈 / IDF 13SR Seal Ring				
Size	ØA	ØD	H1	H
1"	23	32.5	3	7
1.5"	36	46	3	7
2"	49	59.5	3	7
2.5"	60.7	73	3	7
3"	73.2	86.5	3	7
4*R	98	113.1	3	7
4*H	98	119.6	5	9.6

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified


产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA




IDF 13H六角螺母 / IDF 13H Hexagonal Nut				
Size	ØA	G	ØD	H
1.0"	30.5	34.34*8T ACME	53.1	30
1.5"	43.5	47.86*8T ACME	69.3	30
2.0"	57	61.37*8T ACME	86.6	30
2.5"	70.7	74.88*8T ACME	103.9	30
3.0"	83.3	88.40*8T ACME	121.2	30
4.0"	112	122.05*6T ACME	153.6	34.9

PRODUCT IMAGE + TECHNICAL DATA




IDF 13R圆形螺母 / IDF 13R Round Nut				
Size	ØA	G	ØD	H
1.0"	30.5	34.34*8T ACME	48	30
1.5"	43.5	47.86*8T ACME	64	30
2.0"	57	61.37*8T ACME	77	30
2.5"	70.7	74.88*8T ACME	91	30
3.0"	83.3	88.40*8T ACME	106	30
4.0"	112	115.41*8T ACME	135	34.9

PRODUCT IMAGE + TECHNICAL DATA



IDF 13HBN六角盲盖螺母 / IDF 13HBN Hexagonal Blank Nut			
Size	G	ØD	H
1.0"	34.34*8T ACME	53.1	30
1.5"	47.86*8T ACME	69.3	30
2.0"	61.37*8T ACME	86.6	30
2.5"	74.88*8T ACME	103.9	30
3.0"	88.4*8T ACME	121.2	30
4.0"	122.05*6T ACME	153.6	34.9

PRODUCT IMAGE + TECHNICAL DATA





ISO 13HBN六角盲盖螺母 / ISO 13HBN Hexagonal Blank Nut			
Size	G	ØD	H
1"	34.34*8T ACME	53.1	30
1.5"	47.86*8T ACME	69.3	30
2"	61.37*8T ACME	86.6	30
2.5"	74.88*8T ACME	103.9	30
3"	88.40*8T ACME	121.2	30
4"	122.05*6T ACME	153.6	34.9

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified


产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA



ISO 13H六角螺母 / ISO 13H Hexagonal Nut				
Size	ØA	G	ØD	H
1"	30.5	34.34*8T ACME	53.1	30
1.5"	43.5	47.86*8T ACME	69.3	30
2"	57	61.37*8T ACME	86.6	30
2.5"	70.7	74.88*8T ACME	103.9	30
3"	83.3	88.40*8T ACME	121.2	30
4"	112	122.05*6T ACME	153.6	34.9

PRODUCT IMAGE + TECHNICAL DATA




ISO 13R圆形螺母 / ISO 13R Round Nut				
Size	ØA	G	ØD	H
1"	30.5	34.34*8T ACME	48	30
1.5"	43.5	47.86*8T ACME	64	30
2"	57	61.37*8T ACME	77	30
2.5"	70.7	74.88*8T ACME	91	30
3"	83.3	88.40*8T ACME	106	30
4"	112	122.05*6T ACME	135	34.9

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified


产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA





ISO 13SR由任垫圈 / ISO 13SR Seal Ring			
Size	ØA	ØD	H
1"	23.2	32.5	7
1.5"	35.9	46	7
2"	48.6	59.5	7
2.5"	61.3	73	7
3"	74	86.5	7
4"	98.6	113.1	7
4"	98.6	119.6	9.6

PRODUCT IMAGE + TECHNICAL DATA



ISO 14B堵板 / ISO 14B End Cap			
Size	ØA	ØD	H
1"	29.2	33.8	10.5
1.5"	42.7	47	10.5
2"	56.2	60.5	10.5
2.5"	69.9	74	10.5
3"	82.6	87.5	10.5
4"	111.1	114.1	12.6
4"	111.1	120.6	12.6

PRODUCT IMAGE + TECHNICAL DATA




ISO 14平接头 / ISO 14 Liner				
Size	ØA	ØB	ØD	H
1"	22.6	25.6	33.8	21.5
1.5"	35.6	38.6	47	21.5
2"	48.6	51.6	60.5	21.5
2.5"	60.3	64.1	74	21.5
3"	72.9	76.7	87.5	21.5
4"	97.6	101.6	114.1	21.5
4"	97.6	102.5	120.6	30

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified



产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA




Size	G	ØD	H
1/2"	19.6*10T WHIT	-	16
3/4"	26.2*10T WHIT	-	16
1"	42.6*8T WHIT	58.7	22.2
1.5"	55.3*8T WHIT	75.1	22.2
2"	68.3*6T WHIT	91.6	22.2
2.5"	80.9*6T WHIT	106.2	22.2
3"	93.6*6T WHIT	120.9	22.2
4"	119.1*6T WHIT	150.1	22.2
6"	169.6*6T WHIT	212.5	23.8

PRODUCT IMAGE + TECHNICAL DATA




Size	ØA	G	ØD	H
1"	33.3	42.6*8T WHIT	58.7	22.2
1.5"	46	55.3*8T WHIT	75.1	22.2
2"	58.7	68.3*6T WHIT	91.6	22.2
2.5"	71.4	80.9*6T WHIT	106.2	22.2
3"	84.1	93.6*6T WHIT	120.9	22.2
4"	109.5	119.1*6T WHIT	150.1	22.2
6"	163.3	169.6*6T WHIT	212.5	23.8

PRODUCT IMAGE + TECHNICAL DATA



Size	ØA	G	ØD	H
1"	33.3	42.6*8T WHIT	58.5	22.2
1.5"	46	55.3*8T WHIT	74	22.2
2"	58.7	68.3*6T WHIT	85.5	22.2
2.5"	71.4	80.9*6T WHIT	98.5	22.2
3"	84.1	93.6*6T WHIT	111.6	22.2
4"	109.5	119.1*6T WHIT	138	22.2
6"	163.3	169.6*6T WHIT	197	23.5

PRODUCT IMAGE + TECHNICAL DATA




Size	ØA	ØB
1"	33.3	22.2
1.5"	46	34.9
2"	58.7	47.6
2.5"	71.4	60.3
3"	84.1	73.6
4"	109.5	97.5
6"	162.6	148.5

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified


产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA





RJT 13SRU由任垫圈(U型) / RJT 13SRU Seal Ring (U-Type)			
Size	ØD1	ØA	ØD
1"	33.3	22.2	40
1.5"	46	34.9	53
2"	58.7	47.6	65
2.5"	71.4	60.3	78
3"	84.1	73.6	91
4"	109.5	97.5	116
6"	162.6	148.5	170

PRODUCT IMAGE + TECHNICAL DATA



RJT 15R扩展式螺纹接头 / RJT 15R Expand Male				
Size	ØA	ØB	G	H
1"	25.5	32.5	45.72*8T WHIT	20
1.5"	38.2	45.2	58.42*8T WHIT	24
2"	50.9	57.9	72.72*6T WHIT	28
2.5"	63.6	70.6	85.42*6T WHIT	32
3"	76.3	83.3	98.12*6T WHIT	32
4"	101.7	108.7	123.52*6T WHIT	32

PRODUCT IMAGE + TECHNICAL DATA




RJT 14R扩展式平接头 / RJT 14R Expand Liner				
Size	ØA	ØB	ØD	H
1"	25.5	32.5	41.3	20
1.5"	38.2	45.2	54	24
2"	50.9	57.9	66.7	28
2.5"	63.6	70.6	79.4	32
3"	76.3	83.3	92.1	32
4"	101.7	108.7	117.5	32

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified


产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

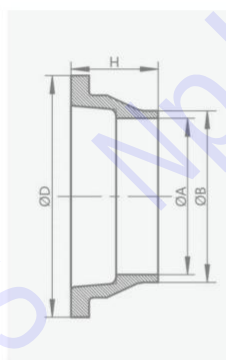


RJT 14平接头 / RJT 14 Liner				
Size	ØA	ØB	ØD	H
1"	22.2	25.4	41.3	19.5
1.5"	34.9	38.1	54	19.5
2"	47.6	50.8	66.7	19.5
2.5"	60.3	63.5	79.4	19.5
3"	73	76.2	92.1	19.5
4"	97.6	101.6	117.5	19.5
6"	148	152.4	169.1	23.5

PRODUCT IMAGE + TECHNICAL DATA




RJT 15螺纹接头 / RJT 15 Male				
Size	ØA	ØB	G	H
1"	22.2	25.4	45.72*8T WHIT	27
1.5"	34.9	38.1	58.42*8T WHIT	27
2"	47.6	50.8	72.72*6T WHIT	27
2.5"	60.3	63.5	85.42*6T WHIT	27
3"	73	76.2	98.12*6T WHIT	27
4"	97.6	101.6	123.52*6T WHIT	27
6"	148	152.4	174.32*6T WHIT	24

PRODUCT IMAGE + TECHNICAL DATA



RJT 14B堵板 / RJT 14B End Cap		
Size	ØD	ØA
1"	41.3	32.5
1.5"	54	45.2
2"	66.7	57.9
2.5"	79.4	70.6
3"	92.1	83.3
4"	117.5	108.7
6"	169.5	161

PRODUCT IMAGE + TECHNICAL DATA




SMS 13RBN圆形盲盖螺母 / SMS 13RBN Round Bland Nut			
Size	ØD	ØG	H
12.7/19	44	RD34*1/8	18
25	51	RD40*1/6	19
32	60	RD48*1/6	22
38	74	RD60*1/6	23
51	84	RD70*1/6	24
63	100	RD85*1/6	28
76	114	RD98*1/6	30
101.6小	138	RD125*1/4	31
101.6大	150	RD132*1/6	31
127	178	RD160*1/6	34
152.4	197	RD180*1/6	32

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified


产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

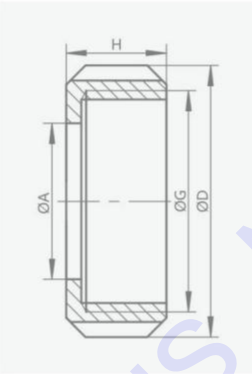

Size	ØA	ØG	ØD	H
12.7/19	25	RD34*1/8	44	18
25	32	RD40*1/6	51	19
32	40	RD48*1/6	60	22
38	48.5	RD60*1/6	74	23
51	60.5	RD70*1/6	84	24
63	74	RD85*1/6	100	28
76	87	RD98*1/6	114	30
101.6小	113	RD125*1/4	138	31
101.6大	117	RD132*1/6	150	31
127	138	RD160*1/6	178	34
152.4	164	RD180*1/6	197	32

PRODUCT IMAGE + TECHNICAL DATA




Size	ØA	ØB	ØD	H
25	22.8	25.1	31.8	5.3
32	29.1	32.1	39.8	5.3
38	35.8	38.1	47.8	5.3
51	48.8	51.1	60.8	5.3
63	61	63.6	73.3	5.3
76	73.4	76.1	85.8	5.3
101.6	100.5	104.1	115.7	5.3
127	123.8	130.2	141.7	5.3
152.4	149.2	155.2	166.7	5.3

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified



产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA




SMS 14GL长型台阶型平接头 / SMS 14GL Long Stepped Liner				
Size	ØA	ØB	ØD	H
12.7	9.4	12.7	30	13
19	15.8	19.1	30	13
25	22.4	25.4	35.5	15.5
32	28.8	31.8	43.5	15.5
38	35.1	38.1	55	16
51	47.8	50.8	65	17
63	60.5	63.5	80	17
76	73.2	76.2	93	19
89	84.9	88.9	101.5	19
101.6小	97.6	101.6	119	19
101.6大	97.6	101.6	126.5	19
127	123	127	150	25
152.4	148.4	152.4	174	25

PRODUCT IMAGE + TECHNICAL DATA




SMS 15L长型螺纹接头 / SMS 15L Long Male				
Size	ØA	ØB	G	H
12.7	9.4	12.7	RD34*1/8	17
19	15.8	19.1	RD34*1/8	17
25	22.4	25.4	RD40*1/6	19
32	28.8	31.8	RD48*1/6	23
38	35.1	38.1	RD60*1/6	23
51	47.8	50.8	RD70*1/6	23
63	60.5	63.5	RD85*1/6	27
76	73.2	76.2	RD98*1/6	27
101.6小	97.6	101.6	RD125*1/4	30
101.6大	97.6	101.6	RD132*1/6	30
127	123	127	RD160*1/6	35
152.4	148.4	152.4	RD180*1/6	35

PRODUCT IMAGE + TECHNICAL DATA



SMS 15R扩展式螺纹接头 / SMS 15R Expanding Male				
Size	ØA	ØB	G	H
19	19.2	25	RD34*1/6	20
25	25.2	32	RD40*1/6	20
32	32.2	40	RD48*1/6	20
38	38.2	47.9	RD60*1/6	23
40	40.2	48	RD60*1/6	23
51	51.2	60.4	RD70*1/6	25
63	63.7	73.5	RD85*1/6	30
76	76.2	86.5	RD98*1/6	35
101.6	101.8	112.5	RD125*1/4	30
104	104.2	112.5	RD132*1/6	30

PRODUCT IMAGE + TECHNICAL DATA




SMS 14R扩展式平接头 / SMS 14R Expanding Liner				
Size	ØA	ØB	ØD	H
25	25.2	31.5	35.5	17
32	32.2	39.5	43.5	17
38	38.2	47.9	55	20
40	40.2	47.5	55	20
51	51.2	60	65	20
63	63.7	73.5	80	25
76	76.2	86.5	93	30
101.6	101.8	112.5	119	27
104	104.2	112.5	126.5	27

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified


产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA





SMS 14GS短型台阶平接头 / SMS 14GS Short Stepped Liner				
Size	ØA	ØB	ØD	H
12.7	9.4	12.7	30	10
19	15.8	19.1	30	10
25	22.4	25.4	35.5	10
32	28.8	31.8	43.5	10
38	35.1	38.1	55	11
51	47.8	50.8	65	13
63	60.5	63.5	80	13
76	73.2	76.2	93	14
89	84.9	88.9	101.5	16
101.6小	97.6	101.6	119	16
101.6大	97.6	101.6	126.5	16
127	123	127	150	23
152.4	148.4	152.4	174	23

PRODUCT IMAGE + TECHNICAL DATA



SMS 14S短型无台阶平接头 / SMS 14S Short Liner (Without Step)				
Size	ØA	ØB	ØD	H
12.7	9.4	12.7	30	8
19	15.8	19.1	30	8
25	22.4	25.4	35.5	7.5
32	28.8	31.8	43.5	7.5
38	35.1	38.1	55	9
51	47.8	50.8	65	9
63	60.5	63.5	80	9
76	73.2	76.2	93	10
101.6	97.6	101.6	119	12
101.6	97.6	101.6	126.5	12

PRODUCT IMAGE + TECHNICAL DATA



SMS 15S短型螺纹接头 / SMS 15S Short Male				
Size	ØA	ØB	G	H
12.7	9.4	12.7	RD34*1/8	16
19	15.8	19.1	RD34*1/8	16
25	22.4	25.4	RD40*1/6	18
32	28.8	31.8	RD48*1/6	19
38	35.1	38.1	RD60*1/6	20
51	47.8	50.8	RD70*1/6	20
63	60.5	63.5	RD85*1/6	24
76	73.2	76.2	RD98*1/6	24
101.6小	97.6	101.6	RD125*1/4	27
101.6大	97.6	101.6	RD132*1/6	30
127	123	127	RD160*1/6	33
152.4	148.4	152.4	RD180*1/6	33

PRODUCT IMAGE + TECHNICAL DATA




SMS 13SRU由任垫圈(U型) / SMS 13SRU Seal Ring (U-Type)			
Size	Ød	ØD	H
25	24.9	32	5.5
32	31.9	40	5.5
38	37.9	48	5.5
51	50.9	61	5.5
63	63.4	73.5	5.5
76	75.9	86	6
89	87.9	98	6
101.6	103.9	116	6
127	130	142	6
152.4	155	167	6

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified

产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

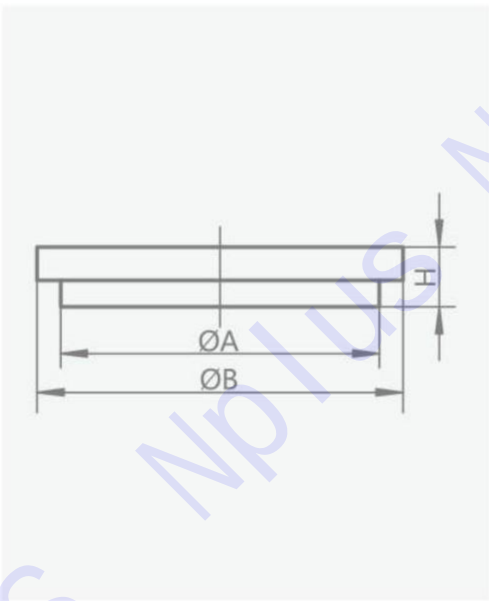


SMS 14B堵板 / SMS 14B End Cap			
Size	ØA	ØB	H
25	31.5	35.5	7.5
32	39.5	43.5	7.5
38	47.5	55	9
51	59.5	65	10
63	73.5	80	10
76	86	93	11
101.6小	112	119	11
101.6大	116	126.5	11

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified

产品图片、结构示意与选型参数


PRODUCT IMAGE + TECHNICAL DATA

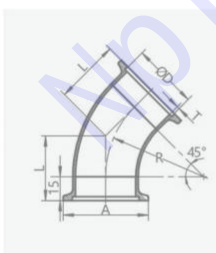

真空法兰式45°弯头 / KF 45° Elbow

Size	ØA	ØD	T	L	R
KF10	30	13	1.5	21.2	15
KF16	30	19		25.4	25
KF25	40	28		29.5	35
KF40	55	44	2	35.7	50
KF50	75	54		37.8	55


PRODUCT IMAGE + TECHNICAL DATA

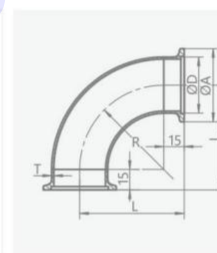

真空法兰式90°弯头 / KF 90° Elbow

Size	ØA	ØD	T	L	R
KF10	30	13	1.5	30	15
KF16	30	19		40	25
KF25	40	28		50	35
KF40	55	44	2	65	50
KF50	75	54		70	55


PRODUCT IMAGE + TECHNICAL DATA

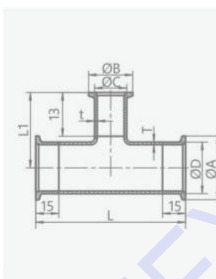

真空法兰式变径三通 / KF Reducer Tee

Size	ØA	ØD	T	ØB	ØC	t	L	L1	L3
KF25-KF16	40	28	1.5	30	19		100	50	33.2
KF40-KF16	55	44		30	19		130	60	35.2
KF40-KF25	55	44		40	28	1.5	130	60	35.2
KF50-KF16	75	54	2	30	19		140	65	35.2
KF50-KF25	75	54		40	28		140	65	35.2
KF50-KF40	75	54		55	44	2	140	65	35.2

PRODUCT IMAGE + TECHNICAL DATA

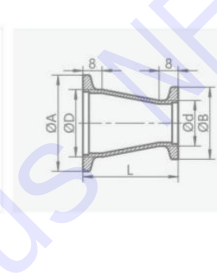

真空法兰式大小头 / KF Concentric Reducer


Size	ØA	ØD	ØB	Ød	L±0.1
KF25/KF16	40	28	30	19	39.9
KF40/KF25	55	44	40	28	39.9

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified


产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA




真空法兰式等径三通 / KF Equal Tee						
Size	ØA	ØD	T	L	L1	L3
KF16	30	19	1.5	80	40	27.7
KF25	40	28		100	50	33.2
KF40	55	44	2	130	65	40.2
KF50	75	54		140	70	40.2

PRODUCT IMAGE + TECHNICAL DATA




真空法兰式等径四通 / KF 4 Way Cross					
Size	ØA	ØD	T	L	L1
KF16	30	19	1.5	80	40
KF25	40	28		100	50
KF40	55	44	2	130	65
KF50	75	54		140	70

PRODUCT IMAGE + TECHNICAL DATA



真空盲板法兰 / KF Blank Flange			
Size	ØA	ØB	L
KF10	30	12.2	5
KF16	30	17.2	
KF25	40	26.2	
KF40	55	41.2	
KF50	75	52.2	

PRODUCT IMAGE + TECHNICAL DATA




KF-卡箍 / KF Single Pin Clamp			
Size	ØA	B	L
10/16	35	45	62
20/25	45	55	73
32/40	60	70	90
50	80	96	123

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified



产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

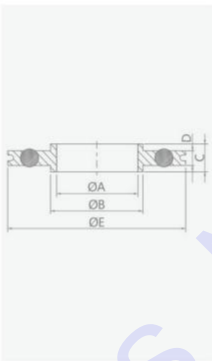

Size	ØA	ØB	C	D	ØE
ISO-63-V-U	67	69.6	8	3.9	91
ISO-80-V-U	80	82.6	8	3.9	104
ISO-100-V-U	100	101.6	8	3.9	123
ISO-160-V-U	150	152.6	8	3.9	170
ISO-200-V-U	210	212.6	8	3.9	234
ISO-250-V-U	257.5	260.4	8	3.9	285
ISO-320-V-U	312	317.3	12	5.6	340
ISO-400-V-U	394	399.2	12	5.6	416
ISO-500-V-U	494	500.2	12	5.6	555

PRODUCT IMAGE + TECHNICAL DATA




Size	ØA	ØB	C	D
KF-10	10	12	8	3.9
KF-16	16	17	8	3.9
KF-25	25	26	8	3.9
KF-40	40	41	8	3.9
KF-50	50	52	8	3.9

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified


产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA




承插焊式真空法兰 / KF Weld Socket Flange					
Size	ØA	ØB	ØD	L	
KF10	30	12.2	13	12.7	40
KF16	30	17.2	19.3		
KF25	40	26.2	25.7		
KF40	55	41.2	38.4	19.1	
KF50	75	52.2	51.1		

PRODUCT IMAGE + TECHNICAL DATA




承插焊式真空法兰盲板 / KF Weld Socket Blank Flange				
Size	ØA	ØB	ØD	L
KF10	30	12.2	13	5
KF16	30	17.2	19.3	
KF25	40	26.2	25.7	
KF40	55	41.2	38.4	
KF50	75	52.2	51.1	

PRODUCT IMAGE + TECHNICAL DATA



直通真空法兰式大小头 / Straight-through vacuum flange type head and head				
Size	ØA	ØB	ØD	L±0.1
KF25/KF16	40	30	19	39.9
KF40/KF25	55	40	28	39.9

PRODUCT IMAGE + TECHNICAL DATA



对焊式真空法兰 / KF Short Weld Flange				
Size	ØA	ØB	ØD	L
KF10	30	12.2	12.7	12.7
KF16	30	17.2	19.1	
KF25	40	26.2	25.4	
KF40	55	41.2	38.1	19.1
KF50	75	52.2	50.8	


PRODUCT DATA / 产品图与参数

Clean connection, clearly specified

产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

插销旋转式清洗球 / Bolt rotary cleaning ball						
DIN	ØA	3A	ØA	ISO/SMS	ØA	SØD
DN15	18.5	1/2"	13.2	12.7	13.2	38
DN20	22.5	3/4"	19.6	19	19.6	53
DN25	28.5	1.0"	26	25	26	53
DN32	35.5	1.25"	32.3	32	32.3	53
DN40	40.5	1.5"	38.6	38	38.6	63
DN50	52.5	2.0"	51.3	51	51.3	76




PRODUCT IMAGE + TECHNICAL DATA

焊接旋转式清洗球 / Weld rotary cleaning ball									
DIN	ØA	ØB	3A	ØA	ØB	ISO/SMS	ØA	ØB	SØD
DN15	15	18	1/2"	9.4	12.7	12.7	9.7	12.7	38
DN20	19	22	3/4"	15.8	19.1	19	16.1	19.1	53
DN25	25	28	1.0"	22.1	25.4	25	22.4	25.4	53
DN32	31	34	1.25"	28.5	31.8	32	28.8	31.8	53
DN40	37	40	1.5"	34.8	38.1	38	35.1	38.1	63
DN50	49	52	2.0"	47.5	50.8	51	47.8	50.8	76

PRODUCT IMAGE + TECHNICAL DATA

夹式旋转式清洗球 / Clamp Rotary Cleaning Ball							
DIN	ØA	3A	ØA	ISO/SMS	ØA	ØK	SØD
DN15	15	1/2"	9.4	12.7	9.7	25.2/K34	38
DN20	19	3/4"	15.8	19	16.1	50.5	53
DN25	25	1.0"	22.1	25	22.4	50.5	53
DN32	31	1.25"	28.5	32	28.8	50.5	53
DN40	37	1.5"	34.8	38	35.1	50.5	63
DN50	49	2.0"	47.5	51	47.8	64	76

PRODUCT IMAGE + TECHNICAL DATA

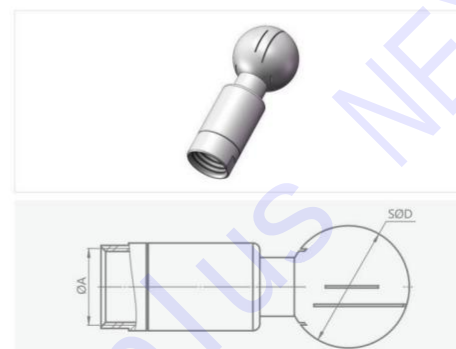

内螺纹旋转式清洗球 / Female Thread Rotary Cleaning Ball		
3A	ØA	SØD
1/4"	BSP 1/4"	38
1/2"	BSP 1/2"	38
3/4"	BSP 3/4"	53
1.0"	BSP 1"	53
1.25"	BSP 1.25"	53
1.5"	BSP 1.5"	63
2.0"	BSP 2"	76

PRODUCT DATA / 产品图与参数


Clean connection, clearly specified

产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

插销固定式清洗球 / Bolt fixed cleaning ball

DIN	ØA	3A	ØA	ISO/SMS	ØA	SØD
DN15	18.5	1/2"	13.2	12.7	13.2	40
DN20	22.5	3/4"	19.6	19	19.6	40
DN25	28.5	1.0"	26	25	26	65
DN32	35.5	1.25"	32.3	32	32.3	65
DN40	40.5	1.5"	38.6	38	38.6	65
DN50	52.5	2.0"	51.3	51	51.3	76



PRODUCT IMAGE + TECHNICAL DATA

焊接固定式清洗球 / Weld Fixed cleaning ball

DIN	ØA	ØB	3A	ØA	ØB	ISO/SMS	ØA	ØB	SØD
DN15	15	18	1/2"	9.4	12.7	12.7	9.7	12.7	40
DN20	19	22	3/4"	15.8	19.1	19	16.1	19.1	40
DN25	25	28	1.0"	22.1	25.4	25	22.4	25.4	65
DN32	31	34	1.25"	28.5	31.8	32	28.8	31.8	65
DN40	37	40	1.5"	34.8	38.1	38	35.1	38.1	65
DN50	49	52	2.0"	47.5	50.8	51	47.8	50.8	76

PRODUCT IMAGE + TECHNICAL DATA

夹式固定式清洗球 / Clamp Fixed Cleaning Ball

DIN	ØA	ØB	3A	ØA	ØB	ISO/SMS	ØA	ØB	ØK	SØD
DN15	15	18	1/2"	9.4	12.7	12.7	9.7	12.7	25.2/K34	40
DN20	19	22	3/4"	15.8	19.1	19	16.1	19.1	25.2/34	40
DN25	25	28	1.0"	22.1	25.4	25	22.4	25.4	50.5	65
DN32	31	34	1.25"	28.5	31.8	32	28.8	31.8	50.5	65
DN40	37	40	1.5"	34.8	38.1	38	35.1	38.1	50.5	65
DN50	49	52	2.0"	47.5	50.8	51	47.8	50.8	64	76

以上尺寸仅供参考，未尽尺寸以我司实物为准，另：球体大小及总长可按要求订制。




PRODUCT DATA / 产品图与参数

Clean connection, clearly specified


产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA




椭圆形孔盖(压力型) / Oval manhole cover (With pressure)		
A	A1	高度(Height)
435.0	335.0	75.0
535.0	435.0	75.0
635.0	525.0	75.0

PRODUCT IMAGE + TECHNICAL DATA





圆形孔盖(压力型) / Round manhole cover (With pressure)	
D	高度(Height)
400.0	120.0
430.0	120.0
450.0	120.0
500.0	120.0
600.0	120.0

PRODUCT IMAGE + TECHNICAL DATA



圆形孔盖(非压力型) / Round manhole cover (Without pressure)		
D	H	T
400.0	100.0	2.0
430.0	100.0	2.5
450.0	100.0	2.5
500.0	100.0	3.5
600.0	100.0	3.5

PRODUCT IMAGE + TECHNICAL DATA




长方形孔盖(非压力型) / Rectangular manhole cover (Without pressure)		
A	A1	高度(Height)
335.0	435.0	65.0
435.0	512.0	65.0

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified


产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

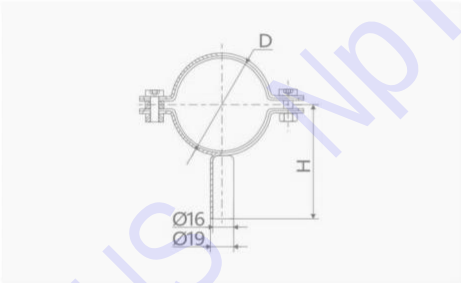


Size	D	H
1/2"	12.7	58.4
3/4"	19.1	62.5
1"	25.4	65.7
1½"	38.1	72
2"	50.8	78.4
2½"	63.5	84.8
3"	76.2	91
4"	101.6	103.8
5"	129	117.5
6"	154	130
8"	204	155
10"	254	180
12"	304	205

PRODUCT IMAGE + TECHNICAL DATA

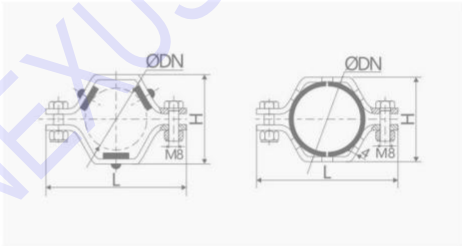


Size	D	L
1"	25.4	87
1½"	38.1	101.6
2"	50.8	114.3
2½"	63.5	120.6
3"	76.2	139.7
4"	101.6	171.4

PRODUCT IMAGE + TECHNICAL DATA

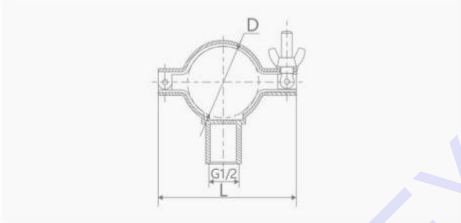

Size	D	L
1"	25.4	61
1½"	38.1	76
2"	50.8	90
2½"	63.5	106
3"	76.2	120
4"	101.6	146

PRODUCT IMAGE + TECHNICAL DATA

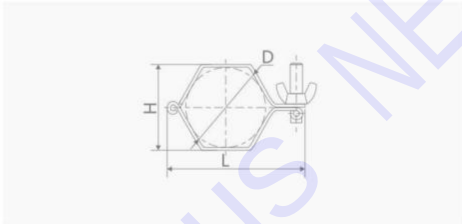


Size	D	L	H
1"	25.4	87	28
1½"	38.1	101.6	40
2"	50.8	114.3	52
2½"	63.5	120.6	66
3"	76.2	139.7	77
4"	101.6	171.4	104

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified


产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

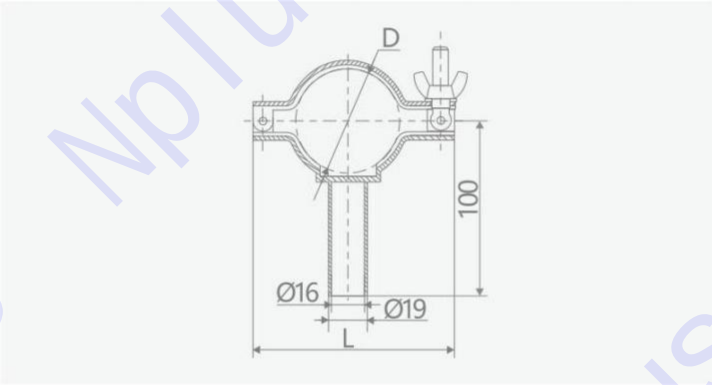

Size	D	L
1"	25.4	61
1½"	38.1	76
2"	50.8	90
2½"	63.5	106
3"	76.2	120
4"	101.6	146

PRODUCT IMAGE + TECHNICAL DATA

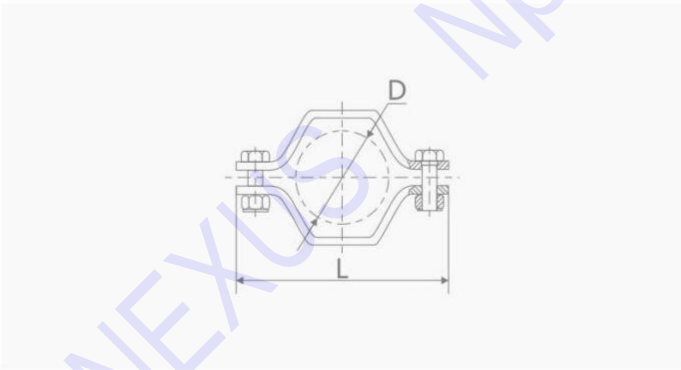


Size	D	L
21.3	21.3	68
26.9	26.9	74
33.7	33.7	82
42.4	42.4	93
48.3	48.3	101
60.3	60.3	114
88.9	88.9	149
114.3	114.3	177

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified


产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

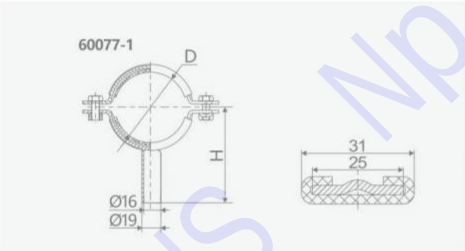


Size	D	H
1/2"	12.7	90
3/4"	19.1	90
1"	25.4	90
1 1/2"	38.1	90
2"	50.8	90
2 1/2"	60.5	90
3"	76.2	90
4"	101.6	90
5"	129	117.5
6"	154	130
8"	204	155
10"	254	180
12"	304	205

PRODUCT IMAGE + TECHNICAL DATA

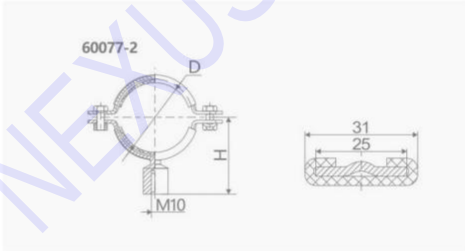


Size	D	H
1/2"	12.7	40.4
3/4"	19.1	44.5
1"	25.4	47.7
1 1/2"	38.1	54
2"	50.8	60.4
2 1/2"	63.5	66.8
3"	76.2	73
4"	101.6	85.8
5"	129	99.5
6"	154	94
8"	204	137
10"	254	162
12"	304	187

PRODUCT IMAGE + TECHNICAL DATA

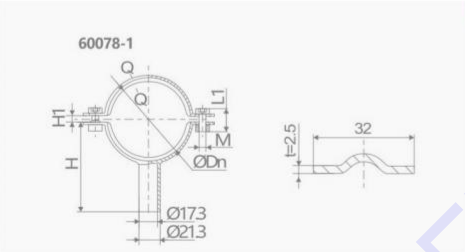

Size	D	H
1/2"	12.7	90
3/4"	19.1	90
1"	25.4	90
1 1/2"	38.1	90
2"	50.8	90
2 1/2"	63.5	90
3"	76.2	90
4"	101.6	90
5"	129	125
6"	154	135
8"	204	145
10"	254	174
12"	304	200

PRODUCT IMAGE + TECHNICAL DATA

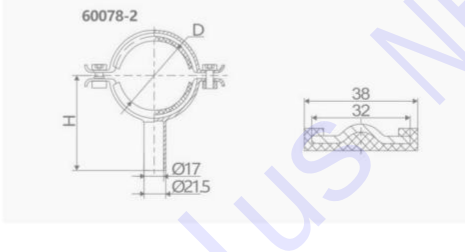


Size	D	H
1/2"	12.7	90
3/4"	19.1	90
1"	25.4	90
1 1/2"	38.1	90
2"	50.8	90
2 1/2"	63.5	90
3"	76.2	90
4"	101.6	90
5"	129	125
6"	154	135
8"	204	145
10"	254	174
12"	304	200

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified

产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA

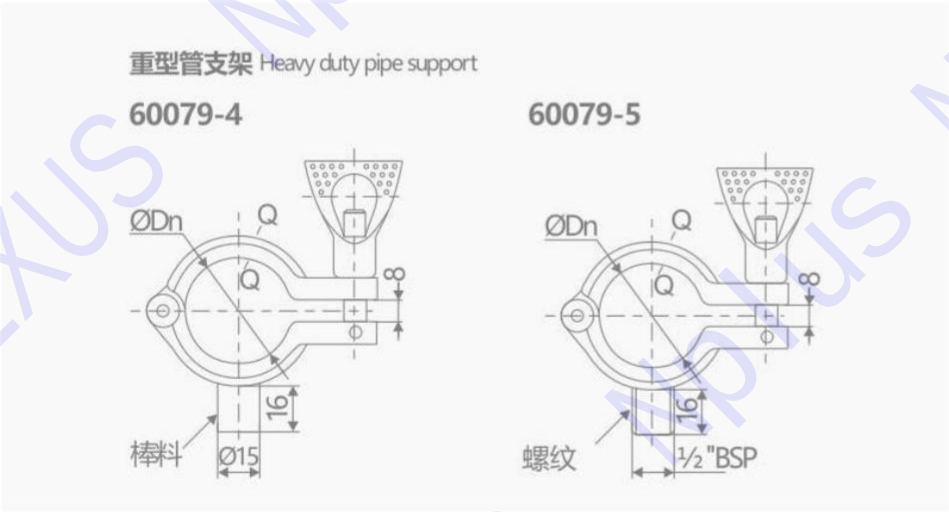

Size	D
1"	25.4
1¼"	31.8
1½"	38.1
2"	50.8
2½"	63.5
3"	76.2
3½"	89
4"	101.6

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified


产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA




3A 由任视镜 / 3A Union Sight Glass				
Size	ØA	ØB	ØD	H
1.5"	34.8	38.1	78	42
2"	47.5	50.8	92	45
2.5"	60.2	63.5	112	49
3"	72.9	76.2	127	54
4"	97.6	101.6	148	63

PRODUCT IMAGE + TECHNICAL DATA

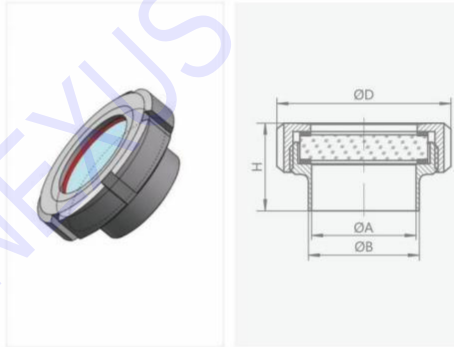

DIN 由任视镜 / DIN Union Sight Glass				
Size	ØA	ØB	ØD	H
DN20	19	22	54	32
DN25	25	28	63	38
DN40	37	40	78	38
DN50	49	52	82	40
DN65	66	70	112	40
DN80	81	85	119	40
DN100	100	106	140	42
DN125	125	131	178	42

PRODUCT IMAGE + TECHNICAL DATA

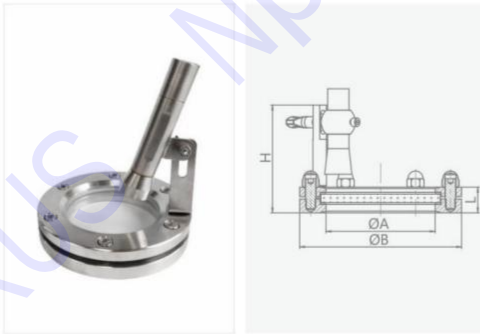


带灯法兰视镜 / Flange Sight Glass With Light				
Size	ØA	ØB	L	H
DN50	78	140	30	126
DN80	98	155	30	126
DN100	128	190	30	126
DN125	154	224	35	131
DN150	182	250	41	137
DN200	233	310	46	142

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified



产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA




带电池由任视镜 / Union Sight Glass With Light				
Size	ØA	ØB	L	H
DN50	49	52	36	129.5
DN65	66	70	51.5	148.5
DN80	81	85	57.5	153.5
DN100	100	104	66.5	163.5

PRODUCT IMAGE + TECHNICAL DATA




焊接式直通视镜 / Weld Straight Sight Glass				
Size	ØDn	ØD	ØE	H
DN20	19	22	47	155
DN25	25	28	87	155
DN32	31	34	87	155
DN40	37	40	87	156
DN50	49	52	100	156
DN65	66	70	115	158
DN80	81	85	125	163
DN100	100	104	160	170

PRODUCT IMAGE + TECHNICAL DATA



夹式直通视镜 / Clamp Straight Sight Glass					
Size	ØDn	ØD	ØK	ØE	H
1"	22.1	25.4	50.5	87	155
1.5"	34.8	38.1	50.5	87	156
2"	47.5	50.8	64	100	156
2.5"	60.2	63.5	77.5	115	158
3"	72.9	76.2	91	125	163
4"	97.4	101.6	119	160	170

PRODUCT IMAGE + TECHNICAL DATA



球形四通视镜 / 4 Way Sight Glass				
Size	ØD	t	L	H
DN40	41	1.5	163	90
DN50	53	1.5	167	102
DN65	70	2	190	120
DN80	85	2	205	132
DN100	104	2	250	148




PRODUCT DATA / 产品图与参数

Clean connection, clearly specified

产品图片、结构示意与选型参数


PRODUCT IMAGE + TECHNICAL DATA



13MHH 重型单铆钉卡箍 / 13MHH Heavy Duty Single Pin Clamp

Size	ØA	ØB		
1/2" ~ 3/4"	20	28.2		
A37	27.8	37		
1" ~ 1.5"	44.4	53.6		
2"	57.8	67		
2.5"	71.4	80.6		
3"	84	94.2		
3.5"	99	109.2		
4"	110	122		
4.5"	123	133.2		
6"	155.4	170.4		
8"	205	220		


PRODUCT IMAGE + TECHNICAL DATA



13MHMM 重型双铆钉卡箍 / 13MHMM Heavy Duty Double Pin Clamp

Size	ØA	ØB		
1/2" ~ 3/4"	20	28		
1.5"	43.6	53.6		
2"	57	67		
2.5"	70.6	80.6		
3"	84	94		
4"	112	122		
6"	155	170		
8"	205	220.8		


PRODUCT IMAGE + TECHNICAL DATA



13SF 重型双铆钉卡箍 / 13SF Heavy Duty Double Pin Clamp

Size	ØA	ØB		
1/2" ~ 3/4"	20	28		
A37	27.5	42.9		
1" ~ 1.5"	45	58.6		
2"	59	72		
2.5"	67	84		
3"	85	98		
4"	114	127		

PRODUCT IMAGE + TECHNICAL DATA



13MHP 高压卡箍 / 13MHP High Pressure Bolted Clamp


Size	ØA	ØB		
1/2" ~ 3/4"	20.0	28		
1" ~ 1.5"	43.3	52		
2"	56.4	65.5		
2.5"	69.5	79		
3"	77.5	92.5		
4"	108.8	120.5		
6"	158.0	170		
6.5"	173.0	186.2		
8"	222.5	237.5		
10"	258.2	272.8		
12"	309.0	327.6		

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified


产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA




13MHHS 三片式卡箍 / 13MHHS 3 Piece Clamp				
Size	ØA	ØB		
1" ~ 1.5"	56	80		
2"	69.5	94		
2.5"	83	109		
3"	96.5	126		
4"	124.5	154		
12"	323.4	369		

PRODUCT IMAGE + TECHNICAL DATA




13CS 双铆钉卡箍 / 13CS Double Pin Clamp				
Size	ØA	ØB		
1/2" ~ 3/4"	20.5	28.3		
DN10 ~ 20	27.2	37.0		
1.5"	41	53.5		
DN25 ~ 40	44.5	54.5		
2"	54.5	67.0		
DN50	57	68.0		
2.5"	68	80.5		
3"	81.5	94.0		
DN65	84	95.0		
DN80	99	110.0		
4"	109.5	122.0		
DN100	112	123.0		
DN115	123	134.0		
DN125	144	159.0		
6"	157.6	175.1		
DN150	172	187.0		
8"	207.4	225.9		
DN200	222.5	237.5		
DN250	257	272.0		
DN300	308	323.0		

PRODUCT IMAGE + TECHNICAL DATA



13IS 1-Line卡箍 / 13IS 1-Line Clamp				
Size	ØA	ØB		
1" ~ 1.5"	53.4	83.8		
2"	72.2	111		
2.5"	88.1	121.4		
3"	102.4	136.1		
4"	127.8	162		
6"	195.3	242.1		

PRODUCT IMAGE + TECHNICAL DATA



13EU 卡箍 / 13EU Clamp				
Size	ØA	ØB		
DN10-DN20	27.8	37		
DN25-DN40	44.4	53.6		
DN50	57.8	67		
DN65	71.4	80.6		
DN80	84	94.2		
DN100	99	109.2		
DN115	123	133.2		

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified

产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA											
ISO 2037			SMS			3A			ISO/IDF		
Size	D	T	Size	T	T	Size	D	T	Size	D	T
12	12	1	25	1.25	1.5	1/2 "	12.7	1.65	1.0 "	25.4	1.5
12.7	12.7	1	32	1.25	1.5	3/4 "	19.1	1.65	1 1/4 "	32.0	1.5
17.2	17.2	1	38	1.25	1.5	1.0 "	25.4	1.65	1 1/2 "	38.1	1.5
21.3	21.3	1	51	1.25	1.5	1.5 "	38.1	1.65	2.0 "	50.8	1.5
25	25	1.2;1.6	63.5	1.50	2.0	2.0 "	50.8	1.65	2 1/2 "	63.5	2.0
33.7	33.7	1.2;1.6	76	1.60	2.0	2.5 "	63.5	1.65	3.0 "	76.2	2.0
38	38	1.2;1.6	101.6	2.0	2.0	3.0 "	76.2	1.65	3 1/2 "	89.0	2.0
40	40	1.2;1.6				4.0 "	101.6	2.10	4.0 "	101.6	2.0
51	51	1.2;1.6				6.0 "	152.4	2.8	4 1/4 "	108.0	2.0
63.5	63.5	1.6				8.0 "	203.2	2.8			

PRODUCT DATA / 产品图与参数

Clean connection, clearly specified

产品图片、结构示意与选型参数

PRODUCT IMAGE + TECHNICAL DATA									
DIN 11850				BS 4825			ISO 1127		
Size	D*T	D*T	D*T	Size	T	T	Size	OD	ID
DN10	12*1.0	13*1.5	12*1.5	12.7	1.2	1.2	26.9	26.9	1.6
DN15	18*1.0	19*1.5	18*1.5	15.88	1.2	1.2	33.7	33.7	2.0
DN20	22*1.0	23*1.5	22*1.5	19.05	1.2	1.2	42.4	42.4	2.0
DN25	28*1.0	29*1.5	28*1.5	25.4	1.2	1.6	48.3	48.3	2.0
DN32	34*1.0	35*1.5	34*1.5	38.1	1.2	1.6	60.3	60.3	2.0
DN40	40*1.0	41*1.5	40*1.5	50.8	1.2	1.6	76.2	76.2	2.0
DN50	52*1.0	53*1.5	52*1.5	63.5	1.6	1.6	88.9	88.9	2.3
DN65	70*2.0	70*2.0	70*2.0	76.2	1.6	1.6	101.6	101.6	2.3
DN80	85*2.0	85*2.0	85*2.0	101.6	2.0	2.0	114.3	114.3	2.3
DN100	104*2.0	104*2.0	104*2.0	114.3	2.0	2.0	139.7	139.7	2.6
DN125	129*2.0	129*2.0	129*2.0	139.7	2.0	2.0	168.3	168.3	2.6
DN150	154*2.0	154*2.0	154*2.0	168.3	2.6	2.6	219.1	219.1	2.6
	Series 1	Series 2	Recommended series	219.1	2.6	2.6			

PRODUCT IMAGE + TECHNICAL DATA											
JIS G3447											
Size	D	T	Size	T	T	Size	D	T	Size	D	T
1.0 "	25.4	1.2									
1.25 "	31.8	1.2									
1.5 "	38.1	1.2									
2.0 "	50.8	1.5									
2.5 "	63.5	2.0									
3.0 "	76.2	2.0									
3.5 "	88.9	2.0									
4.0 "	101.6	2.0									
4.5 "	114.3	3.0									
5.5 "	139.7	3.0									
6.5 "	165.1	3.0									